



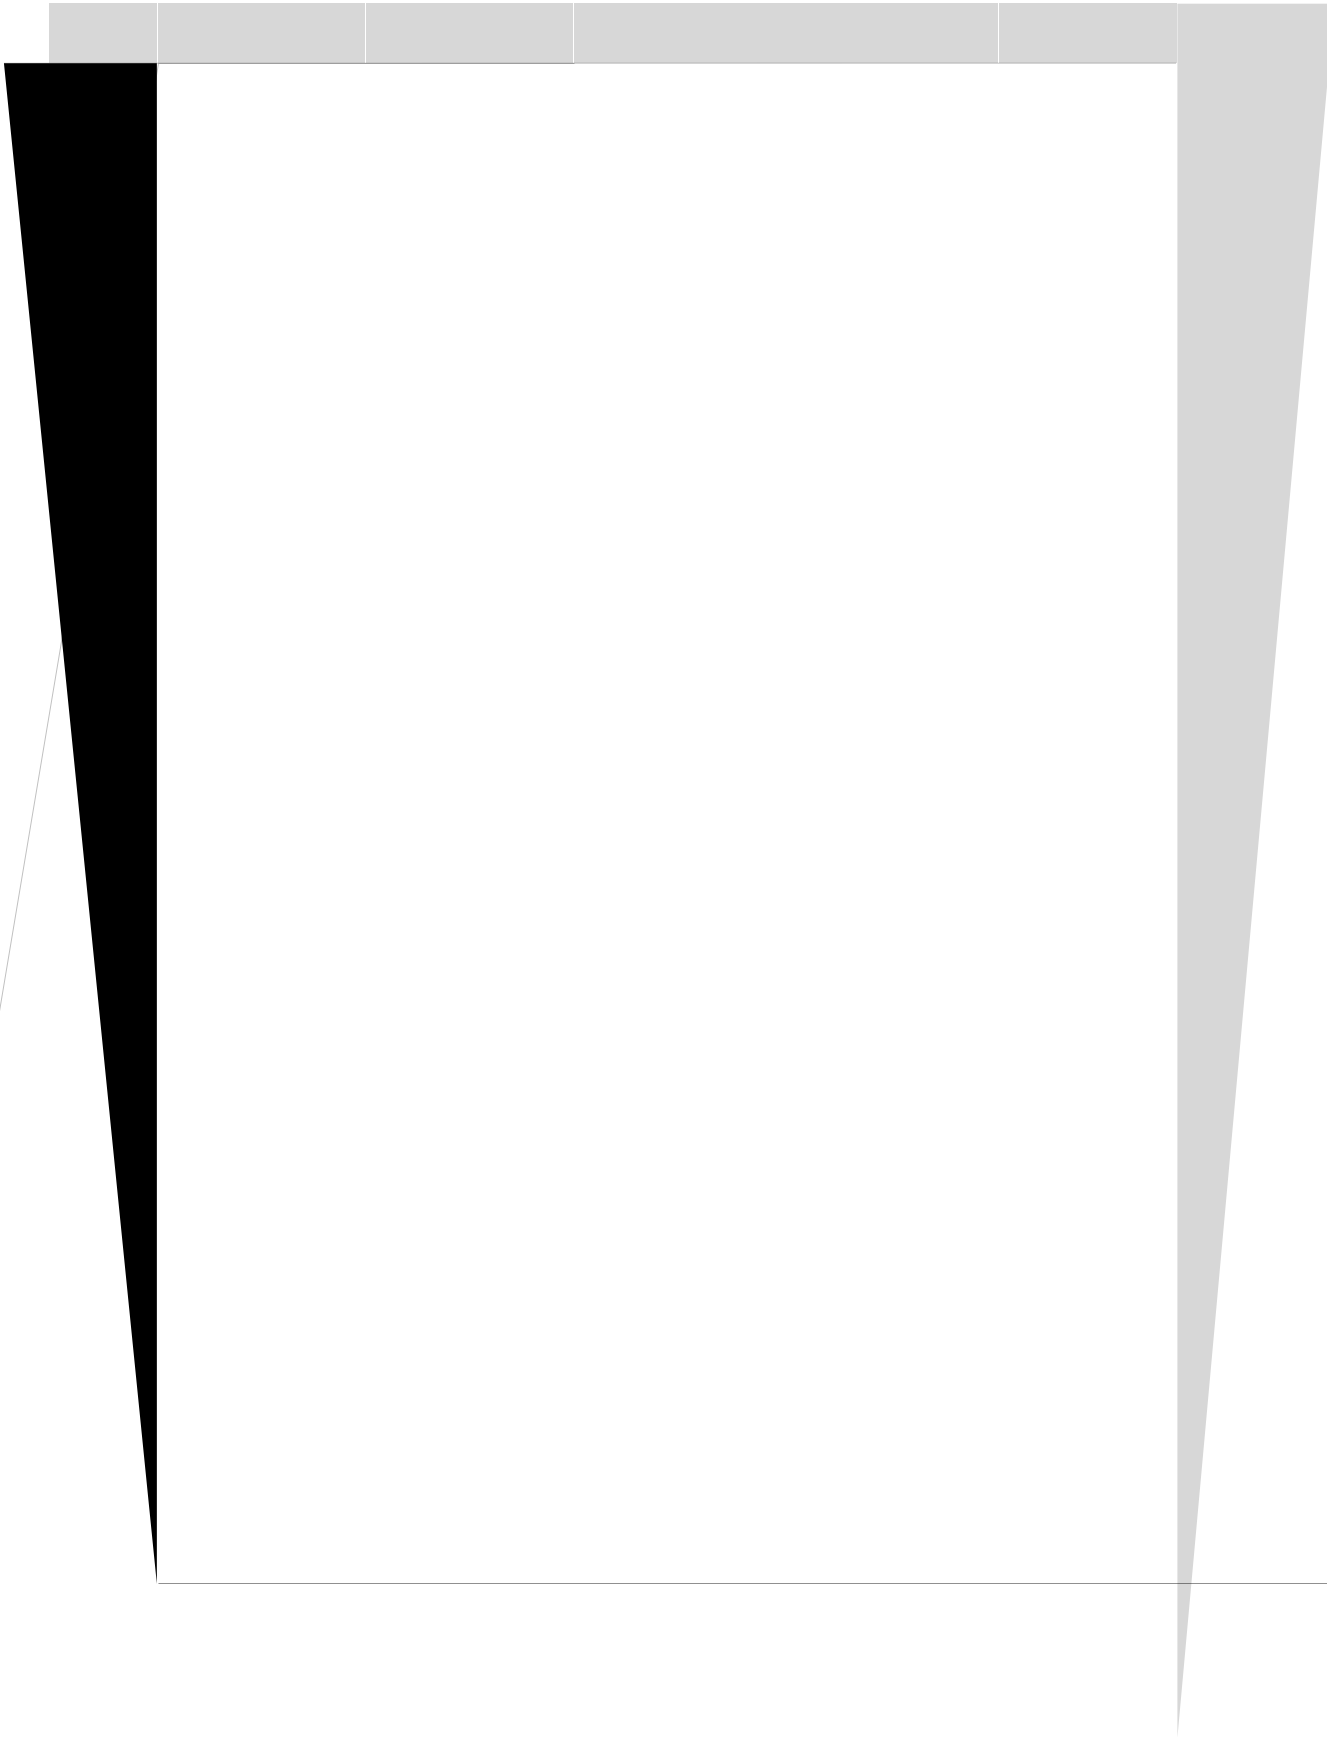



) Silicon NPN Digital transistor in a SOT-23 Plastic Package.

With built-in bias resistors, simplify circuit design, reduce a quantity of parts and manufacturing
proce a RQ e s/ x aa

)



Parameter	Symbol	Rating	Unit
Output Voltage	V_{CC}	50	V
Input Voltage	V_{IN}	40	V
		-10	V
Output Current	I_{CM}	100	mA
	I_O	50	mA
Collector Dissipation	P_C	200	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 150	°C

)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage	$V_{I(off)}$	$V_{CC}=5.0V$ $I_O=100\mu A$			0.5	V
Input Voltage	$V_{I(on)}$	$V_O=0.3V$ $I_O=10mA$	3			V
Output Voltage	$V_{O(on)}$	$I_O=10mA$ $I_i=0.5mA$			0.3	V
Input Current	I_i	$V_i=5.0V$			0.88	mA
Output Cut-off Current	$I_{O(off)}$	$V_{CC}=50V$ $V_i=0V$			0.5	μA
DC Current Gain	G_I	$V_O=5.0V$ $I_O=5.0mA$	30			
Transition Frequency	f_T	$V_{CE}=10V$ $I_C=5.0mA$ $f=100MHz$		250		MHz
Resistance1	R_1		7	10	13	K Ω
Resistance Ratio	R_2/R_1		0.8	1	1.2	




) , ,) % 8 - 3 ; 2 / 3 9 %) " 6 9 2 9 3 ; - 2 / 0 ; / 3) " B 2 . -)

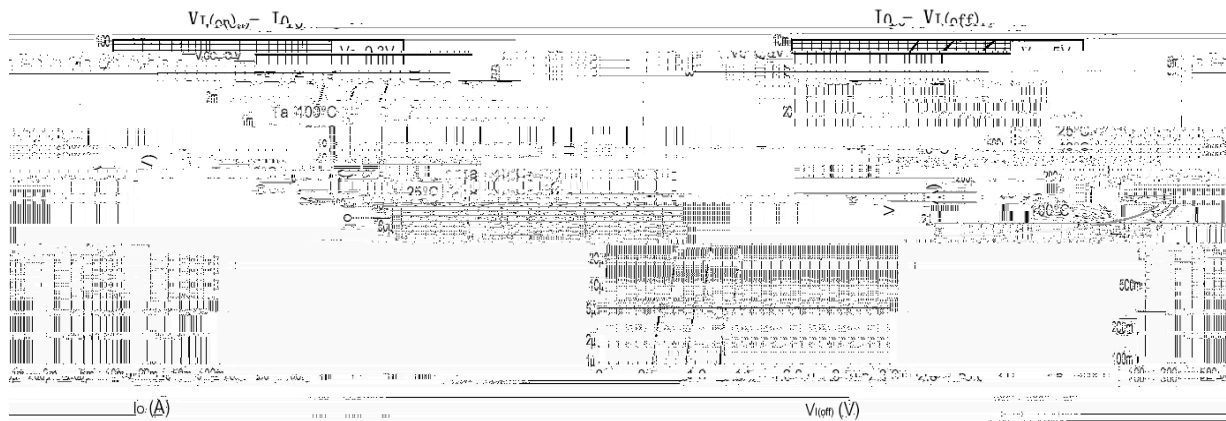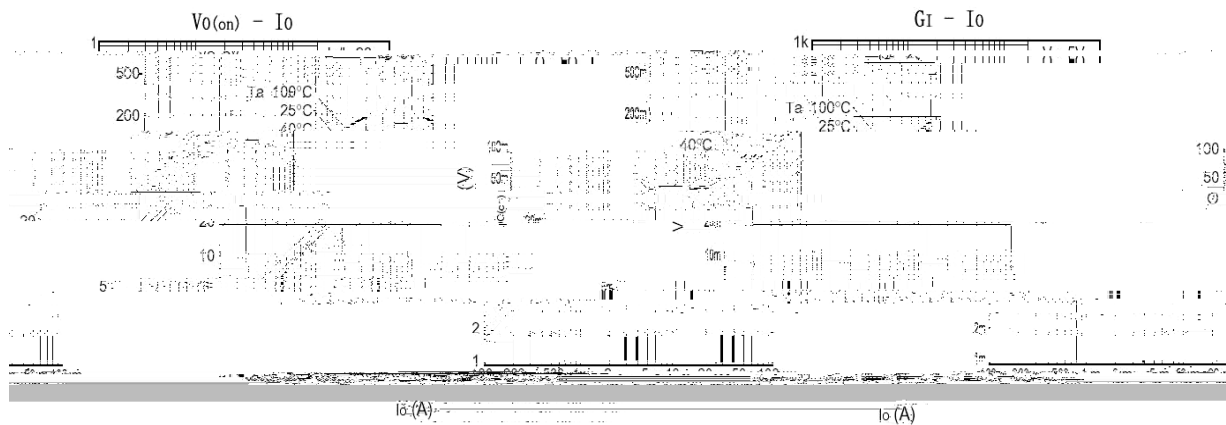

)) ,) D93?9@ -) /H - <0/4<0)

1/2; 0/1/2 3/4 5/6 7/8 9/10 11/12 13/14 15/16 17/18 19/20 21/22 23/24 25/26 27/28 29/30 31/32 33/34 35/36 37/38 39/40 41/42 43/44 45/46 47/48 49/50 51/52 53/54 55/56 57/58 59/60 61/62 63/64 65/66 67/68 69/70 71/72 73/74 75/76 77/78 79/80 81/82 83/84 85/86 87/88 89/90 91/92 93/94 95/96 97/98 99/100

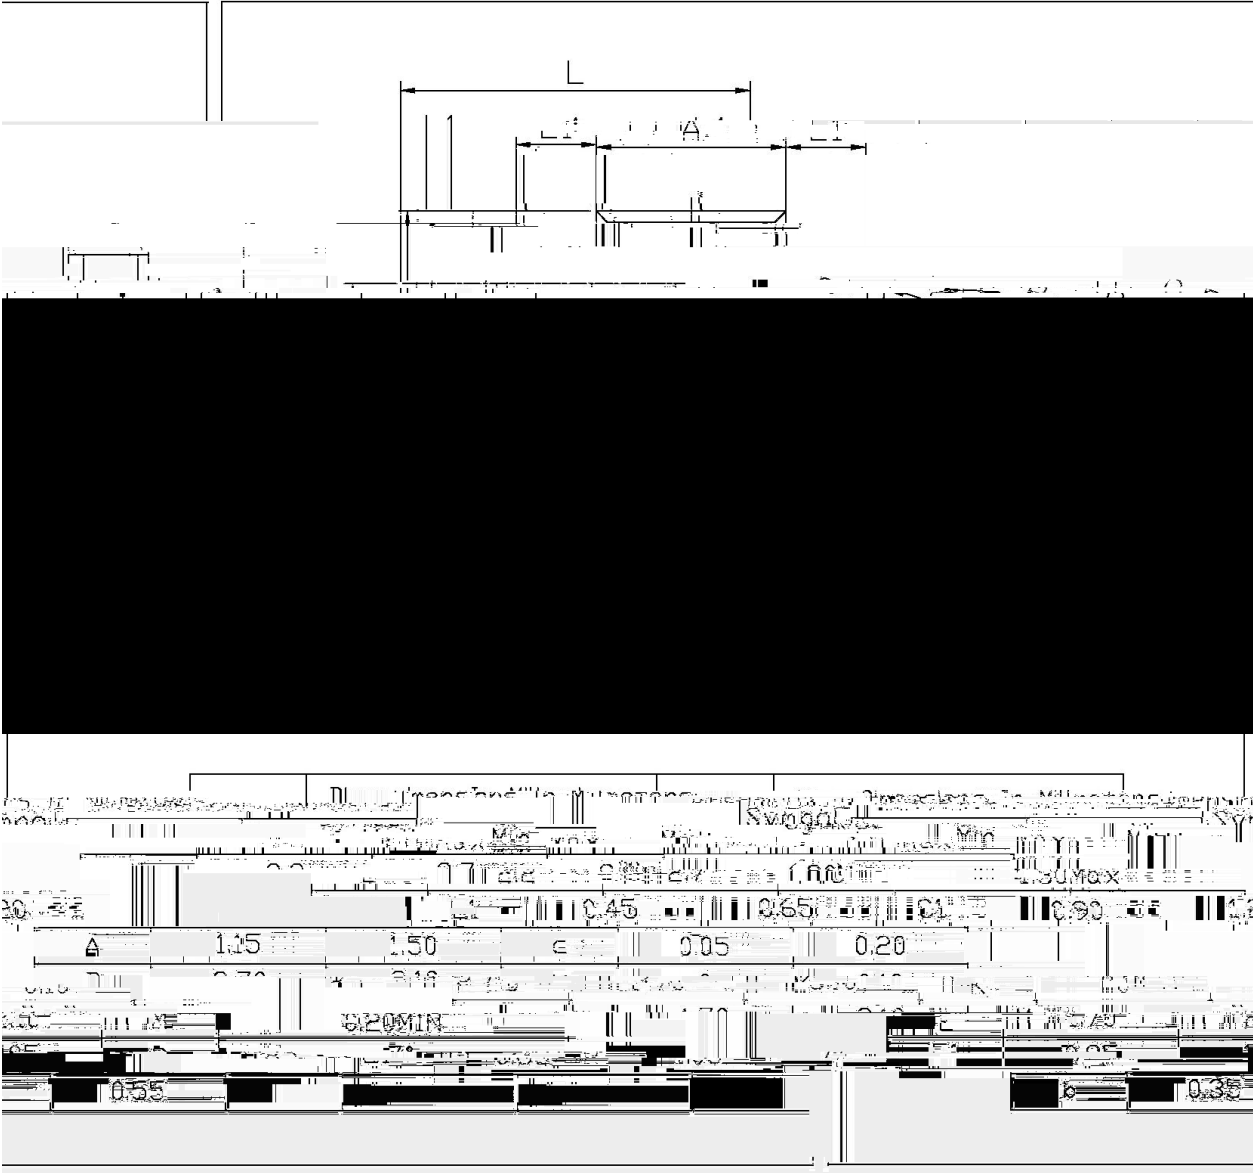



)) ,) > 92 ? / < @) \| < 0 ; 2 B 3 ; / 4 < 0)

