



WR0553 M M E SQS æ M y s ll 1 Silicon PNP transistor in a TO-220 Plastic Package.

g || 0 ^ m || \$ ω π γ [OBJ] د گ ی ل ы ` ж ъ WLS475W م M

Monolithic construction with built in base-emitter shunt resistors, High DC current gain complement to TIP142T.

ᄀ ᄃ ᄄ ᄆ ᄇ ᄉ ᄊ ᄋ ᄌ ᄍ ᄎ ᄏ ᄐ ᄑ ᄒ ᄓ ᄔ ᄕ ᄖ ᄗ ᄘ ᄙ ᄚ ᄛ ᄜ ᄝ ᄞ ᄟ ᄠ ᄡ ᄢ ᄣ ᄤ ᄥ ᄦ ᄧ ᄨ ᄩ ᄪ ᄫ ᄬ ᄭ ᄮ ᄯ ᄰ ᄱ ᄲ ᄳ ᄴ ᄵ ᄶ ᄷ ᄸ ᄹ ᄺ ᄻ ᄼ ᄽ ᄾ ᄿ ᅀ ᅁ ᅂ ᅃ ᅄ ᅅ ᅆ ᅇ ᅈ ᅉ ᅊ ᅋ ᅌ ᅍ ᅎ ᅏ ᅐ ᅑ ᅒ ᅓ ᅔ ᅕ ᅖ ᅗ ᅘ ᅙ ᅚ ᅛ ᅜ ᅝ ᅞ ᅟ ᅠ ᅡ ᅢ ᅣ ᅤ ᅥ ᅦ ᅧ ᅨ ᅩ ᅪ ᅫ ᅬ ᅭ ᅮ ᅯ ᅰ ᅱ ᅲ ᅳ ᅴ ᅵ ᅶ ᅷ ᅸ ᅹ ᆀ ᆁ ᆂ ᆃ ᆄ ᆅ ᆆ ᆇ ᆈ ᆉ ᆊ ᆋ ᆌ ᆍ ᆎ ᆏ ᆐ ᆑ ᆒ ᆓ ᆔ ᆕ ᆖ ᆗ ᆘ ᆙ ᆚ ᆛ ᆜ ᆝ ᆞ ᆟ ᆠ ᆡ ᆢ ᆣ ᆤ ᆥ ᆦ ᆧ ᆨ ᆩ ᆪ ᆫ ᆬ ᆭ ᆮ ᆯ ᆰ ᆱ ᆲ ᆳ ᆴ ᆵ ᆶ ᆷ ᆸ ᆹ ᆺ ᆻ ᆼ ᆽ ᆾ ᆿ ᇀ ᇁ ᇂ ᇃ ᇄ ᇅ ᇆ ᇇ ᇈ ᇉ ᇊ ᇋ ᇌ ᇍ ᇎ ᇏ ᇐ ᇑ ᇒ ᇓ ᇔ ᇕ ᇖ ᇗ ᇘ ᇙ ᇚ ᇛ ᇜ ᇝ ᇞ ᇟ ᇠ ᇡ ᇢ ᇣ ᇤ ᇥ ᇦ ᇧ ᇨ ᇩ ᇪ ᇫ ᇬ ᇭ ᇮ ᇯ ᇰ ᇱ ᇲ ᇳ ᇴ ᇵ ᇶ ᇷ ᇸ ᇹ ᇺ ᇻ ᇼ ᇽ ᇾ ᇿ ሀ ሁ ሂ ሃ ሄ ህ ሆ ሇ ለ ል ሐ ሑ ሒ ሓ ሔ ሕ ሖ ሗ መ ሙ ሚ ማ ሜ ም ሞ ሟ ሠ ሡ ሢ ሣ ሤ ሥ ሦ ሧ ረ ሩ ሪ ራ ሴ ስ ሶ ሷ ሸ ሹ ሺ ሻ ሼ ሽ ሾ ሿ ጀ ጁ ጂ ጃ ጄ ጅ ጆ ጇ ገ ጉ ጊ ጋ ጌ ግ ጎ ጐ ጑ ጒ ጓ ጔ ጕ ጖ ጗ ጘ ጙ ጚ ጛ ጜ ጝ ጞ ጟ ጠ ጡ ጢ ጣ ጤ ጥ ጦ ጧ ጨ ጩ ጪ ጫ ጬ ጭ ጮ ጯ ጰ ጱ ጲ ጳ ጴ ጵ ጶ ጷ ጸ ጹ ጺ ጻ ጼ ጽ ጾ ጿ ፀ ፁ ፂ ፃ ፄ ፅ ፆ ፇ ፈ ፉ ፊ ፋ ፍ ፈ ፏ ፐ ፑ ፒ ፓ ፔ ፕ ፖ ፗ ፘ ፙ ፚ ፛ ፜ ፝ ፞ ፟ ፠ ፡ ። ፣ ፤ ፥ ፦ ፧ ፨ ፩ ፪ ፫ ፬ ፭ ፮ ፯ ፰ ፱ ፲ ፳ ፴ ፵ ፶ ፷ ፸ ፹ ፺ ፻ ፼ ፽ ፿ Ꮐ Ꮑ Ꮒ Ꮓ Ꮔ Ꮕ Ꮖ Ꮗ Ꮘ Ꮙ Ꮚ Ꮛ Ꮜ Ꮝ Ꮞ Ꮟ Ꮠ Ꮡ Ꮢ Ꮣ Ꮤ Ꮥ Ꮦ Ꮧ Ꮨ Ꮩ Ꮪ Ꮫ Ꮬ Ꮭ Ꮮ Ꮯ Ꮰ Ꮱ Ꮲ Ꮳ Ꮴ Ꮵ Ꮶ Ꮷ Ꮸ Ꮹ Ꮺ Ꮻ Ꮼ Ꮽ Ꮾ Ꮿ Ᏸ Ᏹ Ᏺ Ᏻ Ᏼ Ᏽ ᏶ ᏷ ᏸ ᏹ ᏺ ᏻ ᏼ ᏽ ᏾ ᏿ ᐀ ᐁ ᐂ ᐃ ᐄ ᐅ ᐆ ᐇ ᐈ ᐉ ᐊ ᐋ ᐌ ᐍ ᐎ ᐏ ᐐ ᐑ ᐒ ᐓ ᐔ ᐕ ᐖ ᐗ ᐘ ᐙ ᐚ ᐛ ᐜ ᐝ ᐞ ᐟ ᐠ ᐡ ᐢ ᐣ ᐤ ᐥ ᐦ ᐧ ᐨ ᐩ ᐪ ᐫ ᐬ ᐭ ᐮ ᐯ ᐰ ᐱ ᐲ ᐳ ᐴ ᐵ ᐶ ᐷ ᐸ ᐹ ᐺ ᐻ ᐼ ᐽ ᐾ ᐿ ᑀ ᑁ ᑂ ᑃ ᑄ ᑅ ᑆ ᑇ ᑈ ᑉ ᑊ ᑋ ᑌ ᑍ ᑎ ᑏ ᑐ ᑑ ᑒ ᑓ ᑔ ᑕ ᑖ ᑗ ᑘ ᑙ ᑚ ᑛ ᑜ ᑝ ᑞ ᑟ ᑠ ᑡ ᑢ ᑣ ᑤ ᑥ ᑦ ᑧ ᑨ ᑩ ᑪ ᑫ ᑬ ᑭ ᑮ ᑯ ᑰ ᑱ ᑲ ᑳ ᑴ ᑵ ᑶ ᑷ ᑸ ᑹ ᑺ ᑻ ᑼ ᑽ ᑾ ᑿ ᓀ ᓁ ᓂ ᓃ ᓄ ᓅ ᓆ ᓇ ᓈ ᓉ ᓊ ᓋ ᓌ ᓍ ᓎ ᓏ ᓐ ᓑ ᓒ ᓓ ᓔ ᓕ ᓖ ᓗ ᓘ ᓙ ᓚ ᓛ ᓜ ᓝ ᓞ ᓟ ᓠ ᓡ ᓢ ᓣ ᓤ ᓥ ᓦ ᓧ ᓨ ᓩ ᓪ ᓫ ᓬ ᓭ ᓮ ᓯ ᓰ ᓱ ᓲ ᓳ ᓴ ᓵ ᓶ ᓷ ᓸ ᓹ ᓺ ᓻ ᓼ ᓽ ᓾ ᓿ ᔀ ᔁ ᔂ ᔃ ᔄ ᔅ ᔆ ᔇ ᔈ ᔉ ᔊ ᔋ ᔌ ᔍ ᔎ ᔏ ᔐ ᔑ ᔒ ᔓ ᔔ ᔕ ᔖ ᔗ ᔘ ᔙ ᔚ ᔛ ᔜ ᔝ ᔞ ᔟ ᔠ ᔡ ᔢ ᔣ ᔤ ᔥ ᔦ ᔧ ᔨ ᔩ ᔪ ᔫ ᔬ ᔭ ᔮ ᔯ ᔰ ᔱ ᔲ ᔳ ᔴ ᔵ ᔶ ᔷ ᔸ ᔹ ᔺ ᔻ ᔼ ᔽ ᔾ ᔿ ᕀ ᕁ ᕂ ᕃ ᕄ ᕅ ᕆ ᕇ ᕈ ᕉ ᕊ ᕋ ᕌ ᕍ ᕎ ᕏ ᕐ ᕑ ᕒ ᕓ ᕔ ᕕ ᕖ ᕗ ᕘ ᕙ ᕚ ᕛ ᕜ ᕝ ᕞ ᕟ ᕠ ᕡ ᕢ ᕣ ᕤ ᕥ ᕦ ᕧ ᕨ ᕩ ᕪ ᕫ ᕬ ᕭ ᕮ ᕯ ᕰ ᕱ ᕲ ᕳ ᕴ ᕵ ᕶ ᕷ ᕸ ᕹ ᕺ ᕻ ᕼ ᕽ ᕾ ᕿ ᖀ ᖁ ᖂ ᖃ ᖄ ᖅ ᖆ ᖇ ᖈ ᖉ ᖊ ᖋ ᖌ ᖍ ᖎ ᖏ ᖐ ᖑ ᖒ ᖓ ᖔ ᖕ ᖖ ᖗ ᖘ ᖙ ᖚ ᖛ ᖜ ᖝ ᖞ ᖟ ᖠ ᖡ ᖢ ᖣ ᖤ ᖥ ᖦ ᖧ ᖨ ᖩ ᖪ ᖫ ᖬ ᖭ ᖮ ᖯ ᖰ ᖱ ᖲ ᖳ ᖴ ᖵ ᖶ ᖷ ᖸ ᖹ ᖺ ᖻ ᖼ ᖽ ᖾ ᖿ ᗀ ᗁ ᗂ ᗃ ᗄ ᗅ ᗆ ᗇ ᗈ ᗉ ᗊ ᗋ ᗌ ᗍ ᗎ ᗏ ᗐ ᗑ ᗒ ᗓ ᗔ ᗕ ᗖ ᗗ ᗘ ᗙ ᗚ ᗛ ᗜ ᗝ ᗞ ᗟ ᗠ ᗡ ᗢ ᗣ ᗤ ᗥ ᗦ ᗧ ᗨ ᗩ ᗪ ᗫ ᗬ ᗭ ᗮ ᗯ ᗰ ᗱ ᗲ ᗳ ᗴ ᗵ ᗶ ᗷ ᗸ ᗹ ᗺ ᗻ ᗼ ᗽ ᗾ ᗿ ᘀ ᘁ ᘂ ᘃ ᘄ ᘅ ᘆ ᘇ ᘈ ᘉ ᘊ ᘋ ᘌ ᘍ ᘎ ᘏ ᘐ ᘑ ᘒ ᘓ ᘔ ᘕ ᘖ ᘗ ᘘ ᘙ ᘚ ᘛ ᘜ ᘝ ᘞ ᘟ ᘠ ᘡ ᘢ ᘣ ᘤ ᘥ ᘦ ᘧ ᘨ ᘩ ᘪ ᘫ ᘬ ᘭ ᘮ ᘯ ᘰ ᘱ ᘲ ᘳ ᘴ ᘵ ᘶ ᘷ ᘸ ᘹ ᘺ ᘻ ᘼ ᘽ ᘾ ᘿ ᙀ ᙁ ᙂ ᙃ ᙄ ᙅ ᙆ ᙇ ᙈ ᙉ ᙊ ᙋ ᙌ ᙍ ᙎ ᙏ ᙐ ᙑ ᙒ ᙓ ᙔ ᙕ ᙖ ᙗ ᙘ ᙙ ᙚ ᙛ ᙜ ᙝ ᙞ ᙟ ᙠ ᙡ ᙢ ᙣ ᙤ ᙥ ᙦ ᙧ ᙨ ᙩ ᙪ ᙫ ᙬ ᙭ ᙮ ᙯ ᙰ ᙱ ᙲ ᙳ ᙴ ᙵ ᙶ ᙷ ᙸ ᙹ ᙺ ᙻ ᙼ ᙽ ᙾ ᙿ   ᚁ ᚂ ᚃ ᚄ ᚅ ᚆ ᚇ ᚈ ᚉ ᚊ ᚋ ᚌ ᚍ ᚎ ᚏ ᚐ ᚑ ᚒ ᚓ ᚔ ᚕ ᚖ ᚗ ᚘ ᚙ ᚚ ᚛ ᚜ ᚝ ᚞ ᚟ ᚠ ᚡ ᚢ ᚣ ᚤ ᚥ ᚦ ᚧ ᚨ ᚩ ᚪ ᚫ ᚬ ᚭ ᚮ ᚯ ᚰ ᚱ ᚲ ᚳ ᚴ ᚵ ᚶ ᚷ ᚸ ᚹ ᚺ ᚻ ᚼ ᚽ ᚾ ᚿ ᛀ ᛁ ᛂ ᛃ ᛄ ᛅ ᛆ ᛇ ᛈ ᛉ ᛊ ᛋ ᛌ ᛍ ᛎ ᛏ ᛐ ᛑ ᛒ ᛓ ᛔ ᛕ ᛖ ᛗ ᛘ ᛙ ᛚ ᛛ ᛜ ᛝ ᛞ ᛟ ᛠ ᛡ ᛢ ᛣ ᛤ ᛥ ᛦ ᛧ ᛨ ᛩ ᛪ ᛫ ᛬ ᛭ ᛮ ᛯ ᛰ ᛱ ᛲ ᛳ ᛴ ᛵ ᛶ ᛷ ᛸ ᛹ ᛺ ᛻ ᛼ ᛽ ᛾ ᛿ ᜀ ᜁ ᜂ ᜃ ᜄ ᜅ ᜆ ᜇ ᜈ ᜉ ᜊ ᜋ ᜌ ᜍ ᜎ ᜏ ᜐ ᜑ ᜒ ᜓ ᜔ ᜕ ᜖ ᜗ ᜘ ᜙ ᜚ ᜛ ᜜ ᜝ ᜞ ᜟ ᜠ ᜡ ᜢ ᜣ ᜤ ᜥ ᜦ ᜧ ᜨ ᜩ ᜪ ᜫ ᜬ ᜭ ᜮ ᜯ ᜰ ᜱ ᜲ ᜳ ᜴ ᜵ ᜶ ᜷ ᜸ ᜹ ᜺ ᜻ ᜼ ᜽ ᜾ ᜿ ᝀ ᝁ ᝂ ᝃ ᝄ ᝅ ᝆ ᝇ ᝈ ᝉ ᝊ ᝋ ᝌ ᝍ ᝎ ᝏ ᝐ ᝑ ᝒ ᝓ ᝔ ᝕ ᝖ ᝗ ᝘ ᝙ ᝚ ᝛ ᝜ ᝝ ᝞ ᝟ ᝠ ᝡ ᝢ ᝣ ᝤ ᝥ ᝦ ᝧ ᝨ ᝩ ᝪ ᝫ ᝬ ᝭ ᝮ ᝯ ᝰ ᝱ ᝲ ᝳ ᝴ ᝵ ᝶ ᝷ ᝸ ᝹ ᝺ ᝻ ᝼ ᝽ ᝾ ᝿ ក ខ គ ឃ ង ច ឆ ជ ឈ ញ ដ ឋ ឌ ឍ ណ ត ថ ទ ធ ន ប ផ ព ភ ម យ រ ល វ ឝ ឞ ស ហ ឡ អ ឣ ឤ ឥ ឦ ឧ ឨ ឩ ឪ ឫ ឬ ឭ ឮ ឯ

Linear and switching industrial equipment.

PIN1 χ BasePIN 2 χ Collector


χ Emitter


PI7T3


٥ م ٦ ب " See Marking Instructions.

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-100	V
Collector to Emitter Voltage	V_{CEO}	-100	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-10	A
Peak Collector Current	I_{CP}	-15	A
Base Current - Continuous	I_B	-0.5	A
Collector Power Dissipation	$P_C(T_C=25^\circ\text{C})$	80	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 ~ 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C=-30\text{mA}$ $I_B=0$	-100			V
Collector Cut-Off Current	I_{CEO}	$V_{CE}=-50\text{V}$ $I_B=0$			-2.0	mA
Collector Cut-Off Current	I_{CBO}	$V_{CB}=-100\text{V}$ $I_E=0$			-1.0	mA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=-5.0\text{V}$ $I_C=0$			-2.0	mA
DC Current Gain	$h_{FE(1)}$	$V_{CE}=-4.0\text{V}$ $I_C=-5.0\text{A}$	1000			
	$h_{FE(2)}$	$V_{CE}=-4.0\text{V}$ $I_C=-10\text{A}$	500			
Collector to Emitter Saturation Voltage	$V_{CE(sat)(1)}$	$I_C=-5.0\text{A}$ $I_B=-10\text{mA}$			-2.0	V
	$V_{CE(sat)(2)}$	$I_C=-10\text{A}$ $I_B=-40\text{mA}$			-3.0	V
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=-10\text{A}$ $I_B=-40\text{mA}$			-3.5	V
Base to Emitter Voltage	V_{BE}	$V_{CE}=-4.0\text{V}$ $I_C=-10\text{A}$			-3.0	V
Delay Time	t_D	$V_{CC}=-3\text{V}$ $I_C=-5\text{A}$ $I_{B1}=-20\text{mA}$ $I_{B2}=20\text{mA}$ $R_L=6\Omega$		0.15		μs
Rise Time	t_R			0.55		μs
Storage Time	t_{STG}			2.5		μs
Fall Time	t_F			2.5		μs

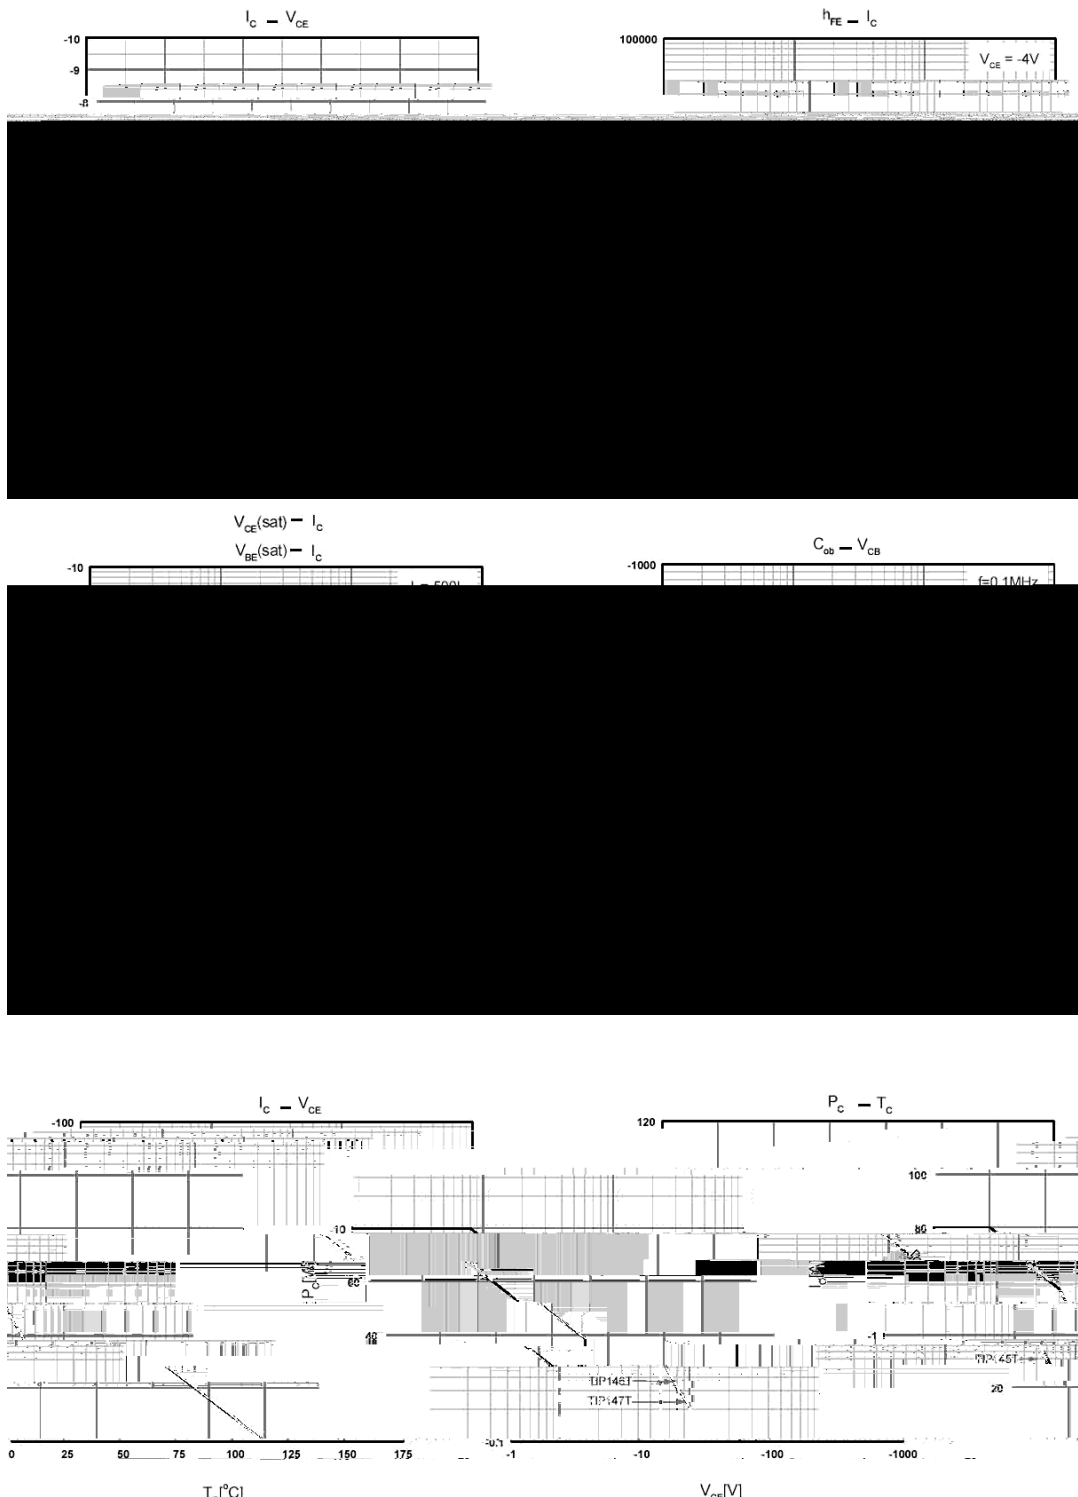

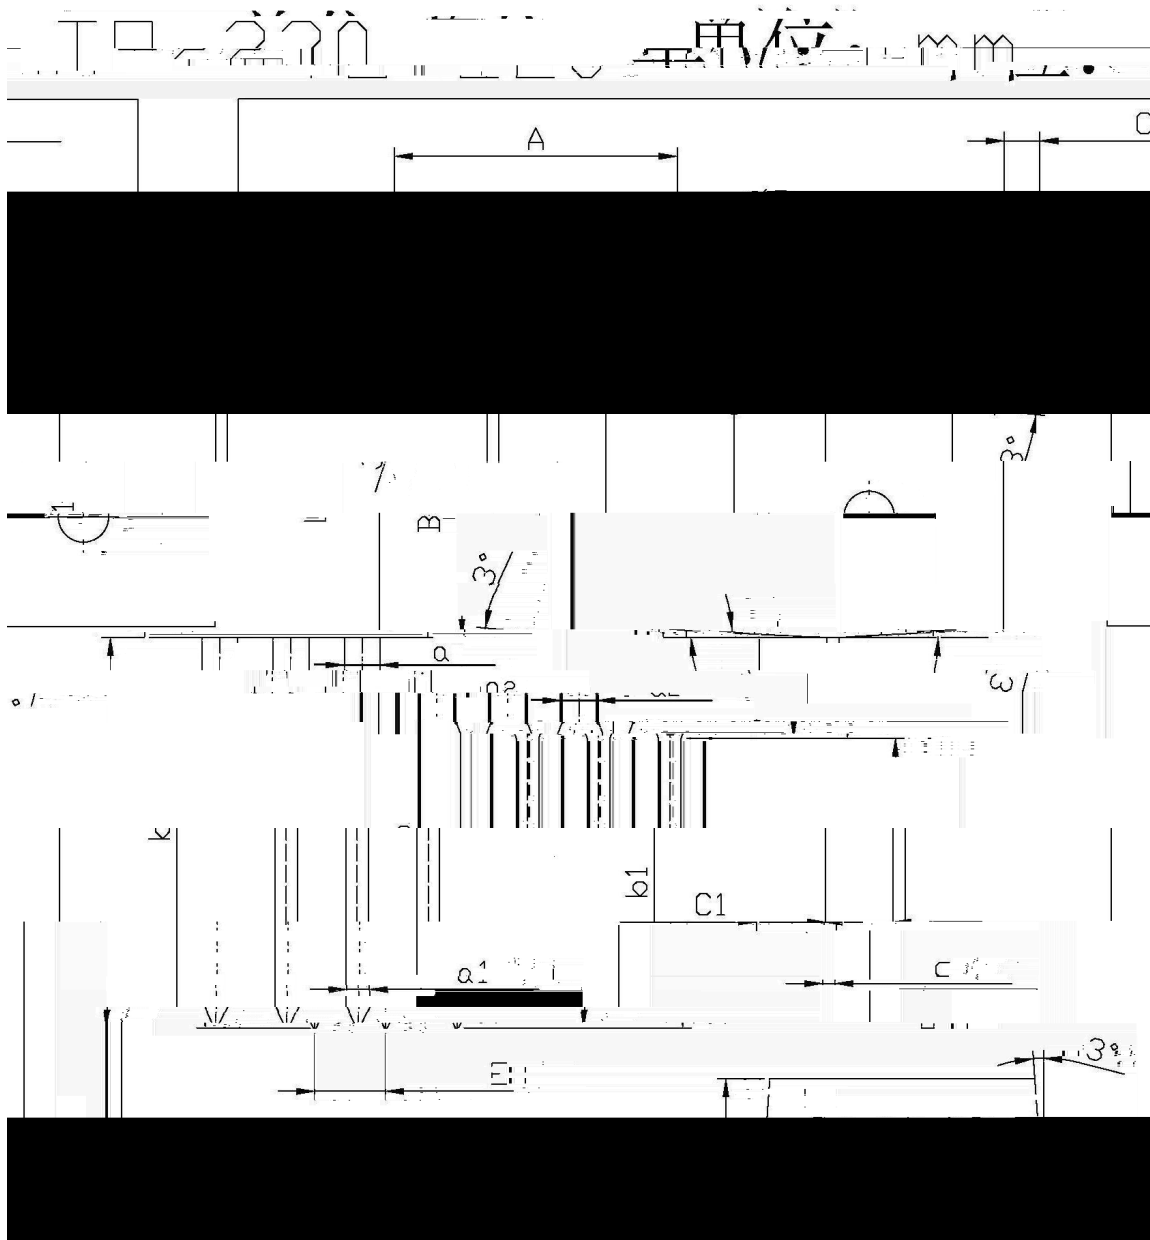

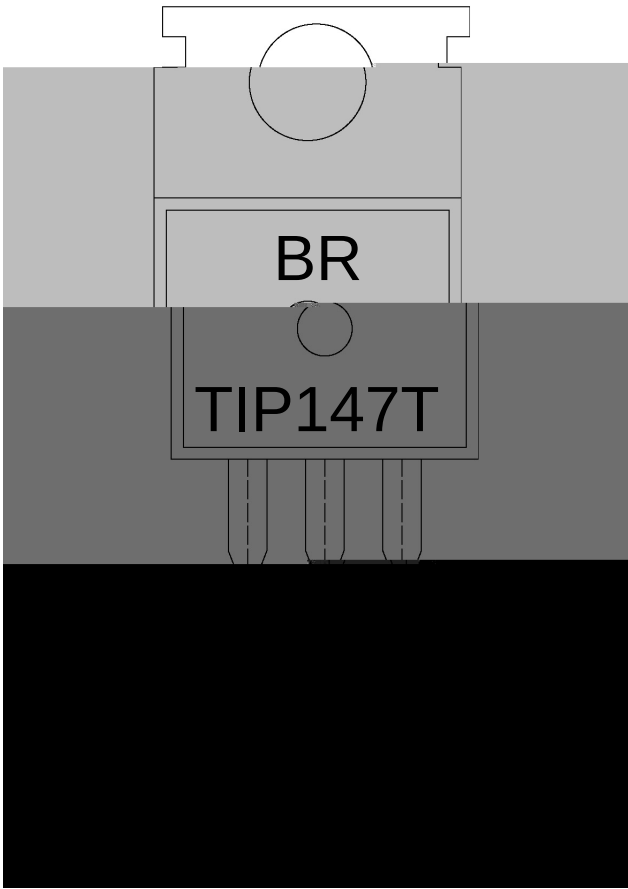

公司代码
EU 公司代码
WLS47:W 公司代码
---- 公司代码
Note:
BR: Company Code
TIP147T: Product Type.
****: Lot No. Code, code change with Lot No.

