
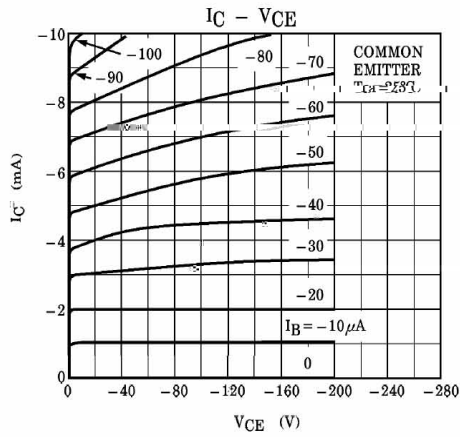
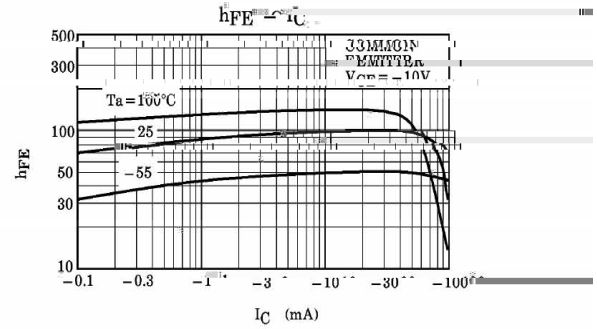
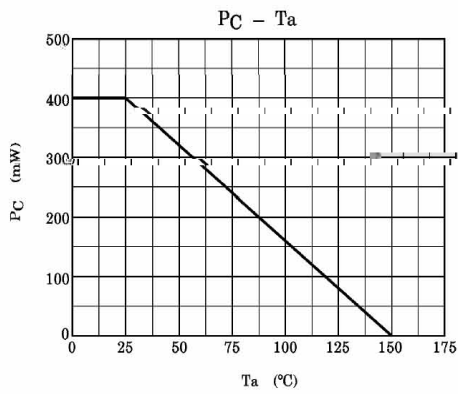
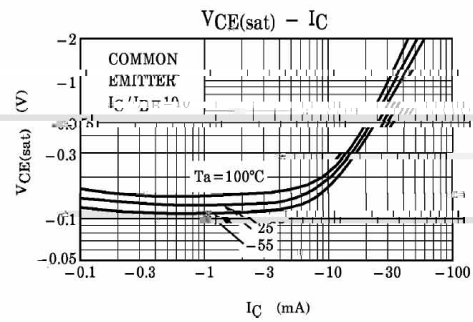
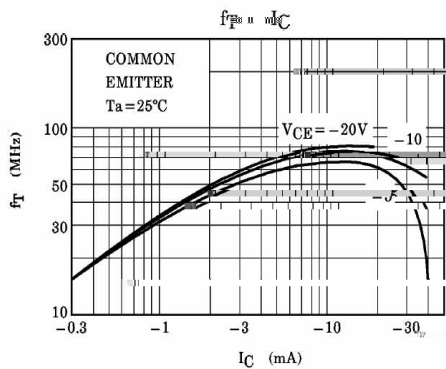


2SA1091
Rev.E Mar.-2016


TO-92 PNP

/ Electrical Characteristic Curve

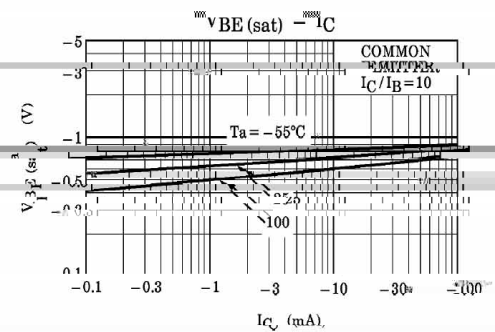

2SA1091
Rev.E Mar.-2016

/ Marking Instructions

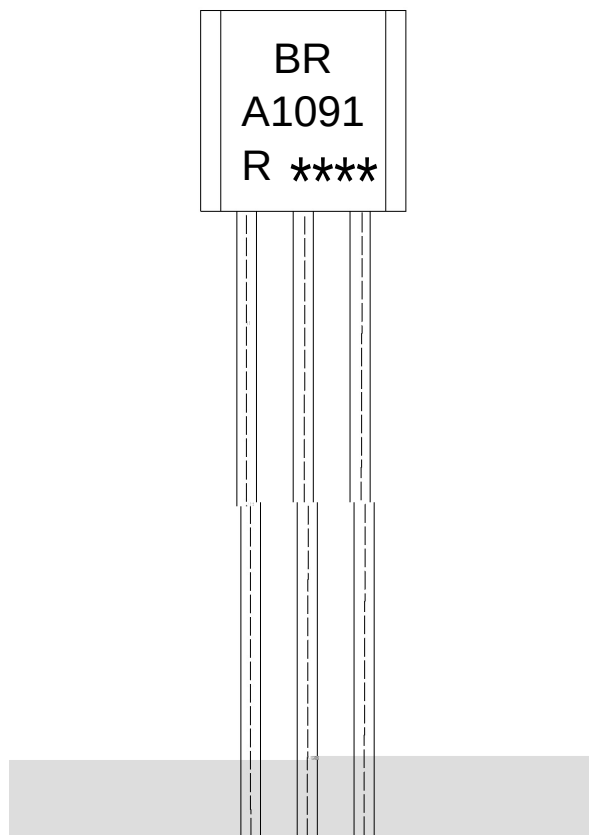

BR:

A1091

R: h_{FE}

Note:

BR: Company Code.

A1091: Product Type.

R: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)



- 1

25 150

60 90sec;

2

255±5

5±0.5sec;

3

2 10

/sec.
- Note:

1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:255±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5

10±1 sec.

Temp:270±5

Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units	Dimension	(unit mm3)
--------------	-------	-----------	---------------