

/ Descriptions


SOT-23                  PNP

/ Features


1                          1                  2SC5342S

/ Applications

/ Equivalent Circuit



/ Pinning




/  $h_{FE}$  Classifications & Marking

|  |  |  |
|--|--|--|
|  |  |  |
|  |  |  |
|  |  |  |


|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|

. -40( 88]TJV0.8857.48 0.479.06 re f 536.46 8[(ht 0.48 30.06 603 6.46 8 1.25148 0.47998 30.603 6.46 T 10.1.25148 0.48001 30.6


## / Electrical Characteristic Curve

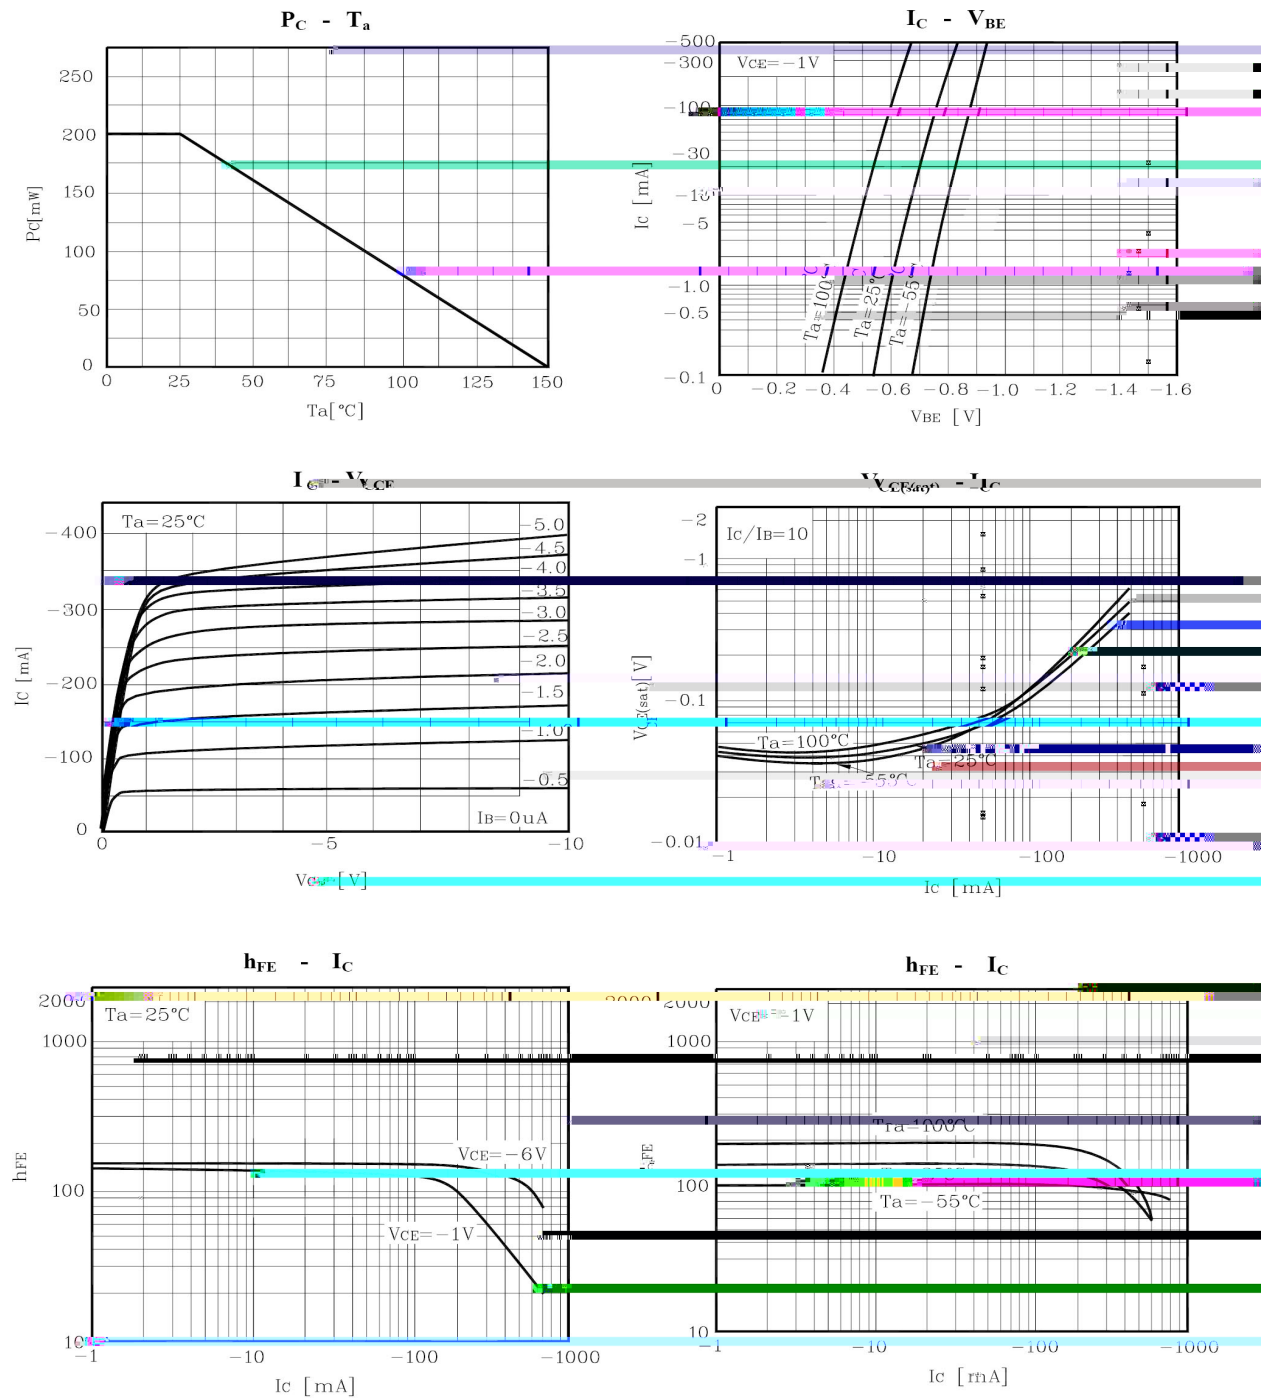

/ Package Dimensions

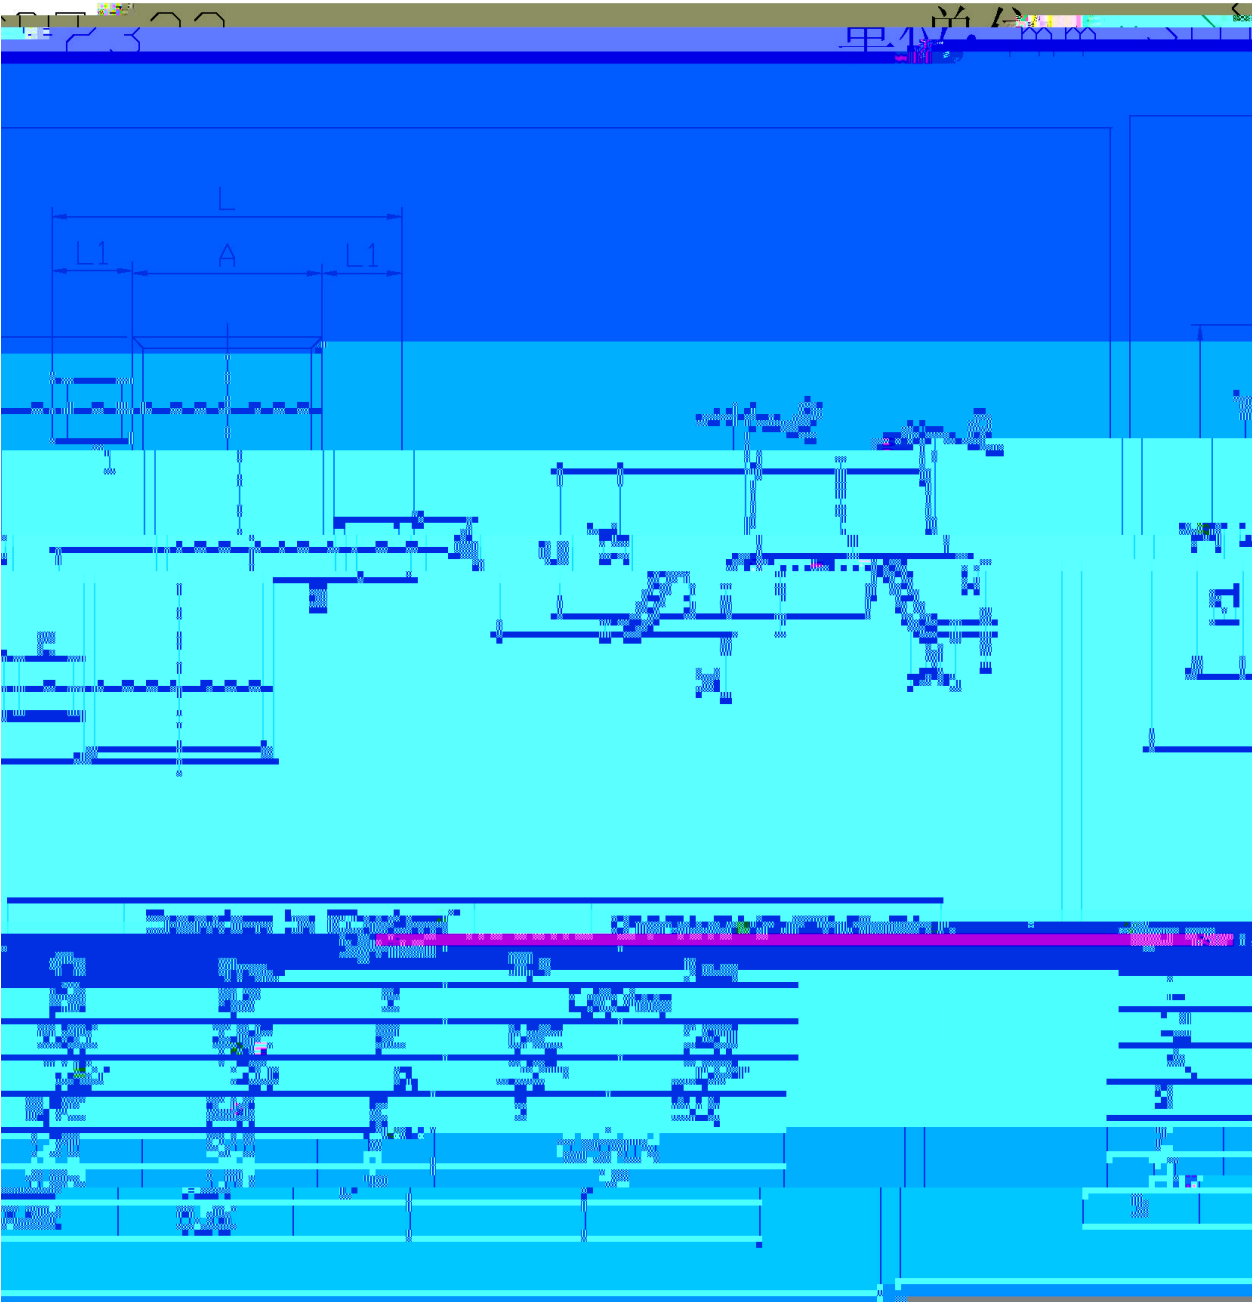

/ Marking Instructions

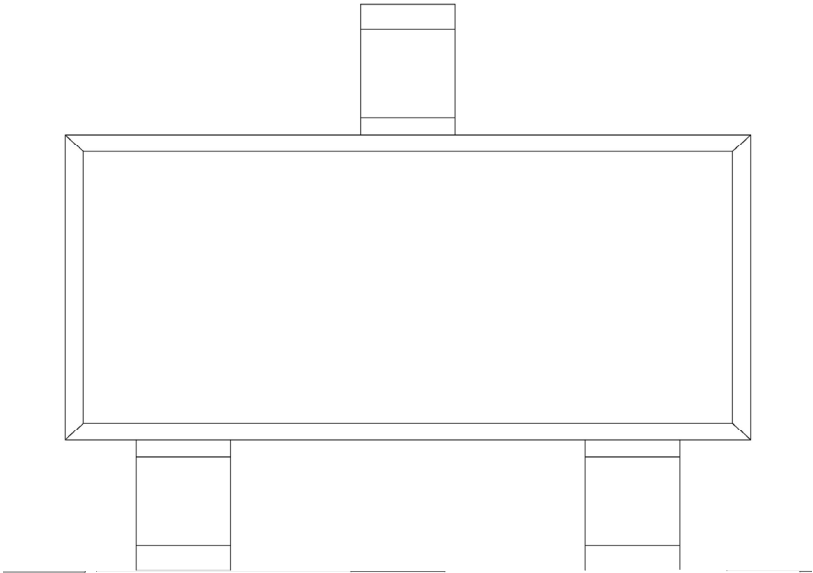

H  
AA  
O:

(     ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

