


Rev.E Mar.-2016

TO-92 PNP Silicon PNP transistor in a TO-92 Plastic Package.




2SC1318
 Complementary pair with 2SC1318.


AF output amplifier and driver.



PIN1 Base ymPTW2(itteCollector -21. 103/TT48Tf49.9667 0 TD63.9403 0199 1 .85/T 0 5 rg5(Si4 287

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-60	V
Collector to Emitter Voltage	V_{CEO}	-50	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-500	mA
Collector Current – Continuous(Pulse)	I_{CP}	-1.0	A
Collector Power Dissipation	P_C	625	mW

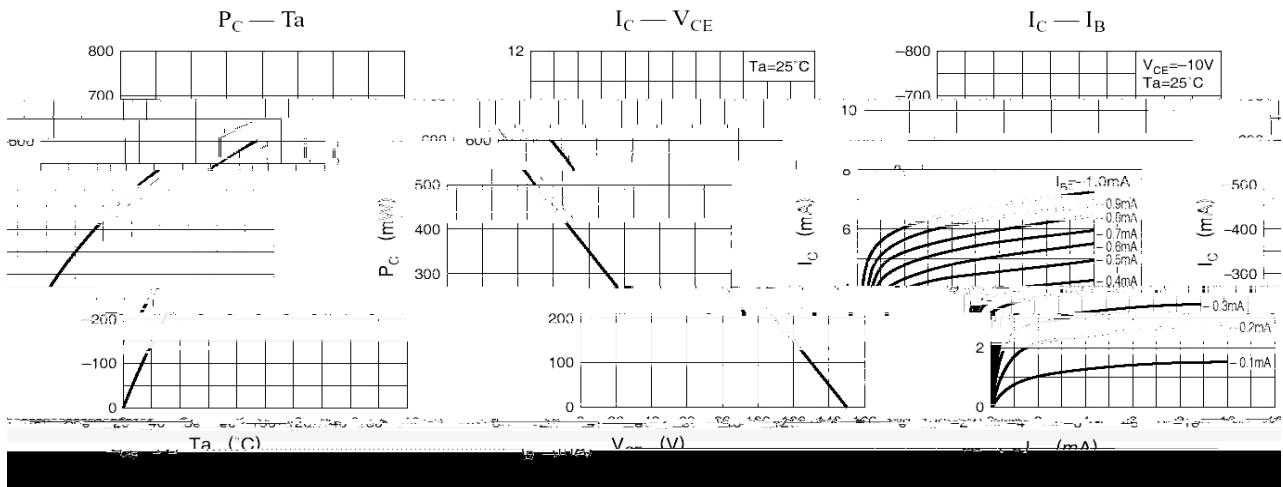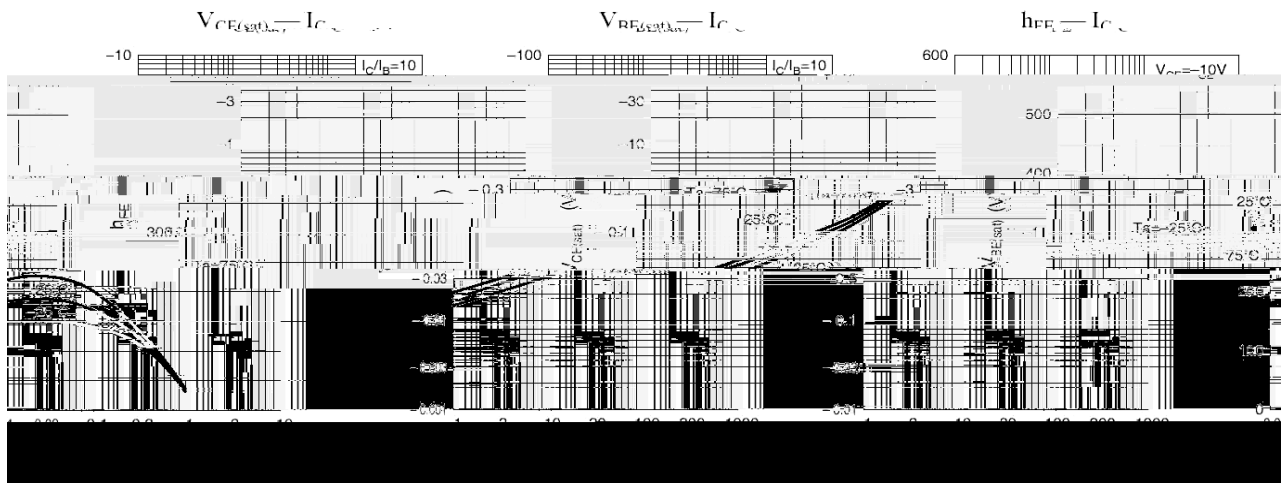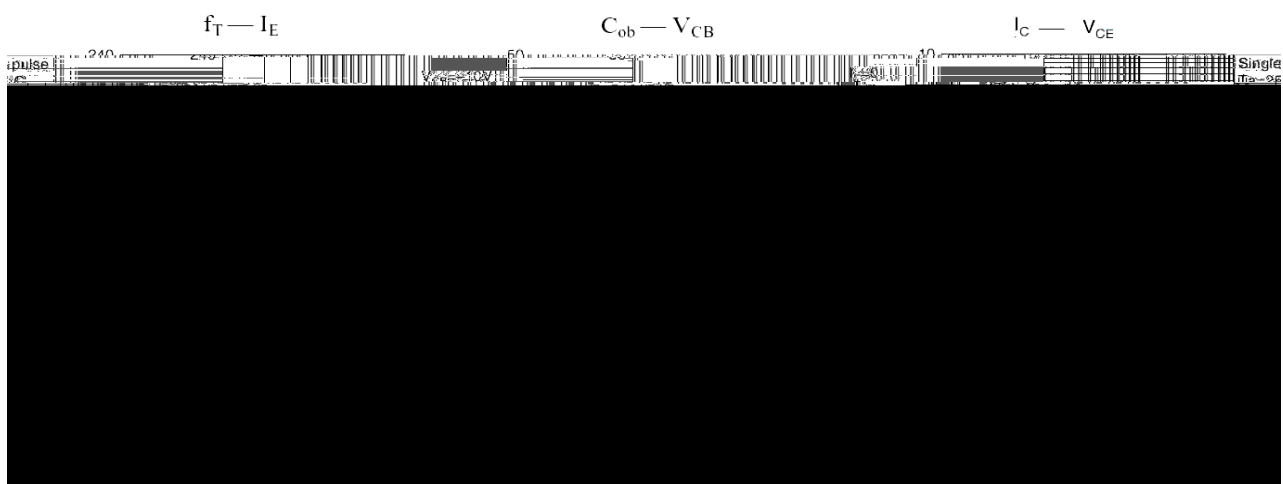

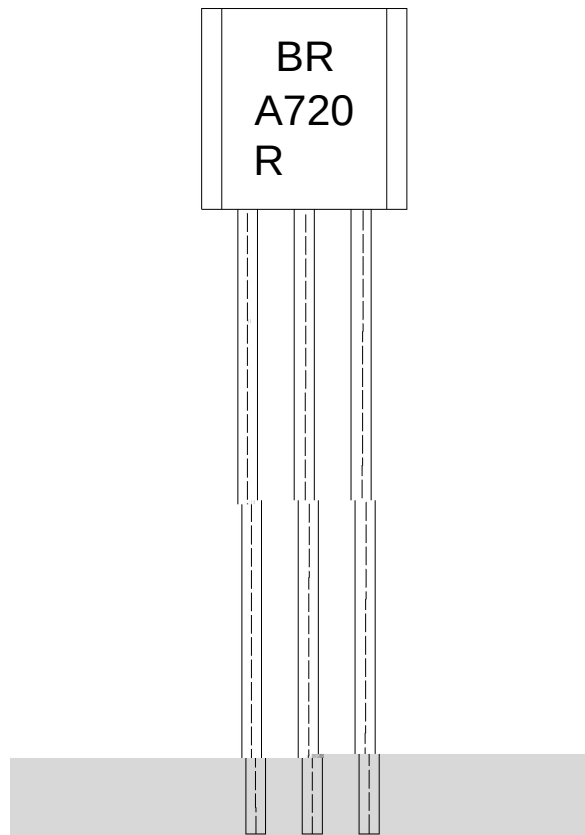

BR:

A720

R: h_{FE}

Note:

BR: Company Code.

A720: Product Type.

R: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.



- 1

25 150

60 90sec;

2

255±5

5±0.5sec;

3

2 10

/sec.
- Note:

1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:255±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

270±5

10±1 sec.

Temp:270±5

Time:10±1 sec

/ BULK

Package Type	Units					Dimension		(unit mm3)

ˆ

* †

h

Š

ù