

/ Descriptions

VRW056 ММ Ё SQS æ Ñ ç s ll 1


/ Features

М Ё я æ l ç ð я Ñ Ñ/ñ 5VG4: ;5N Ñ ´

/ Applications

æ Ñ æ Ñ Ñ A l ´ Ñ æ

/ Equivalent Circuit



/ Pinning



X


X

X


/ hFE Classifications & Marking

Ƶ Ƨ	Ƨ N	Ƨ Ƨ	D Ƨ
			†
		Ƨ	†


Electrical Characteristic Curve

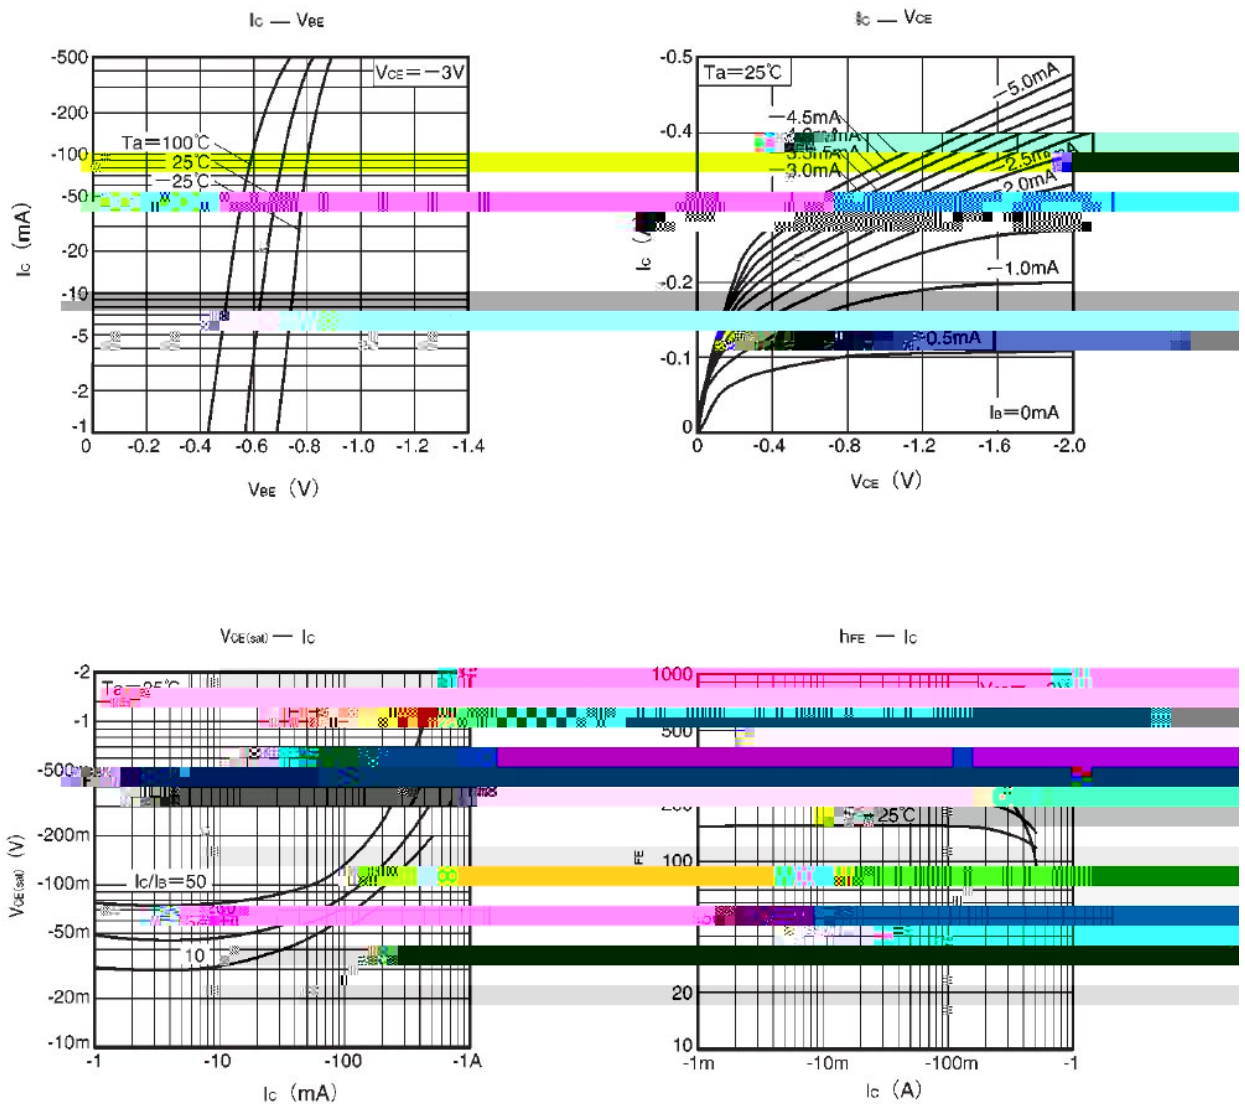

/ Package Dimensions

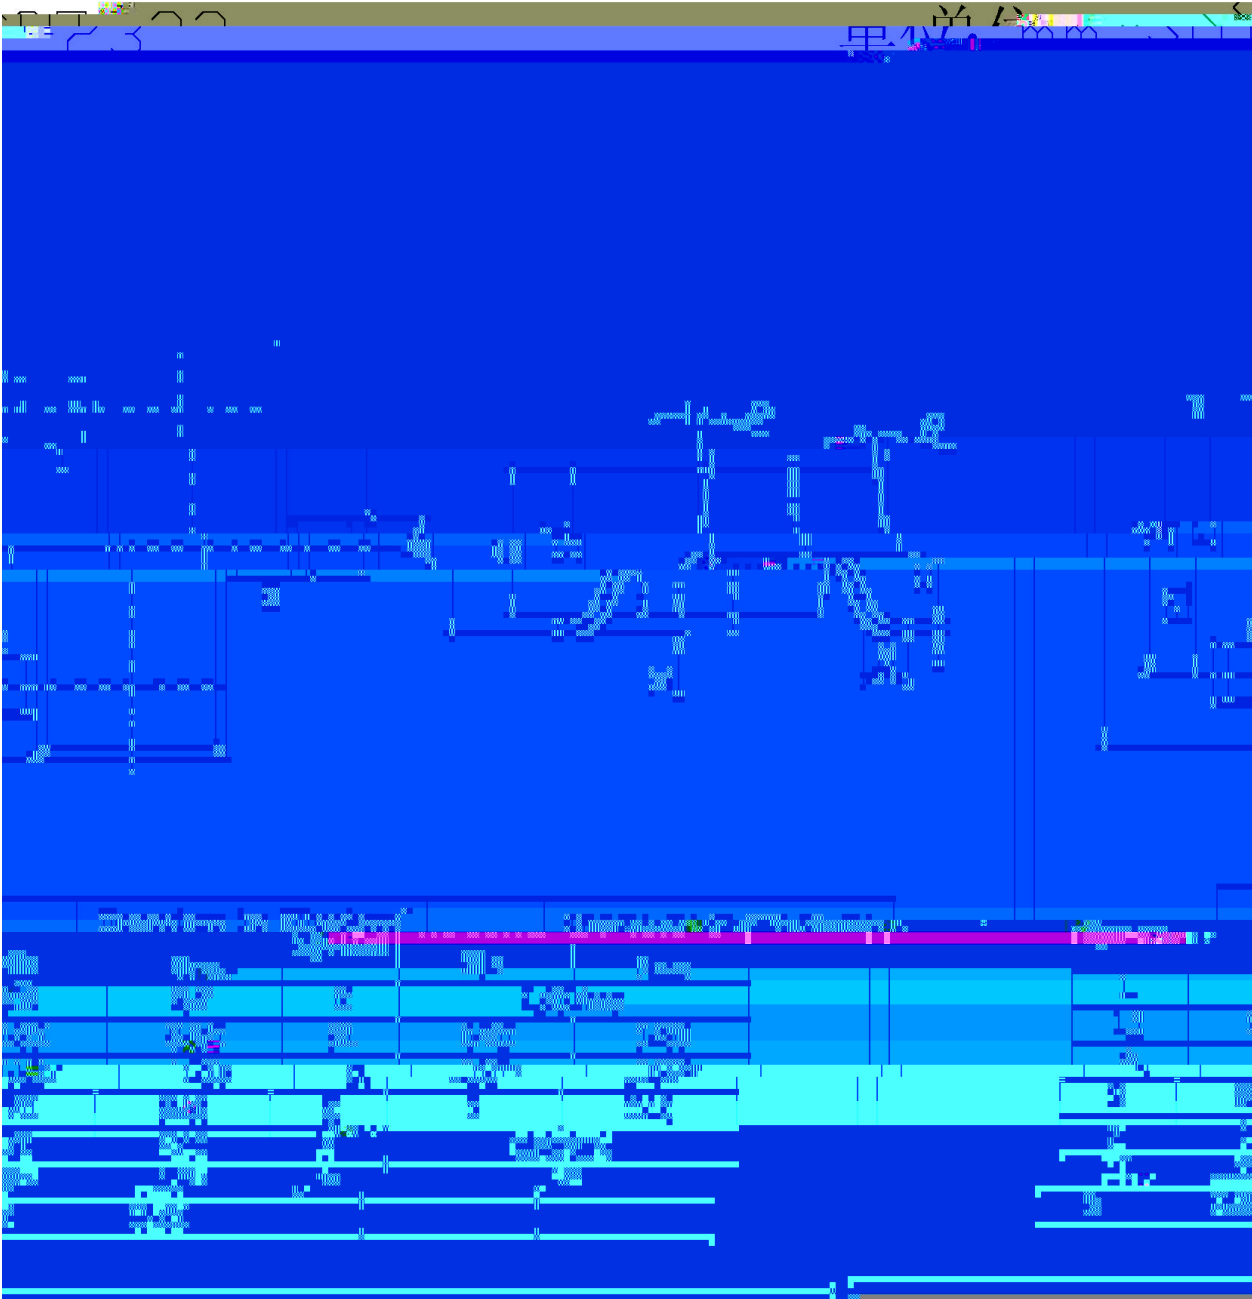


/ Marking Instructions

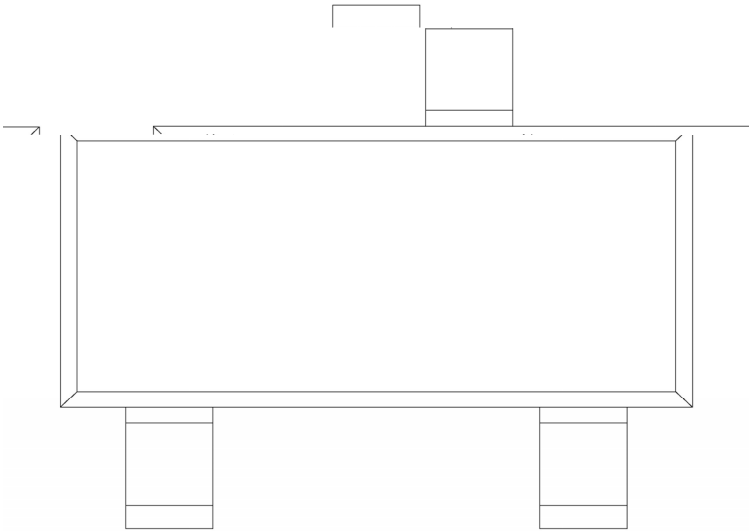

б " X
K X № 3 " П
DN X № 3 " П
U X № ' 6 П

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

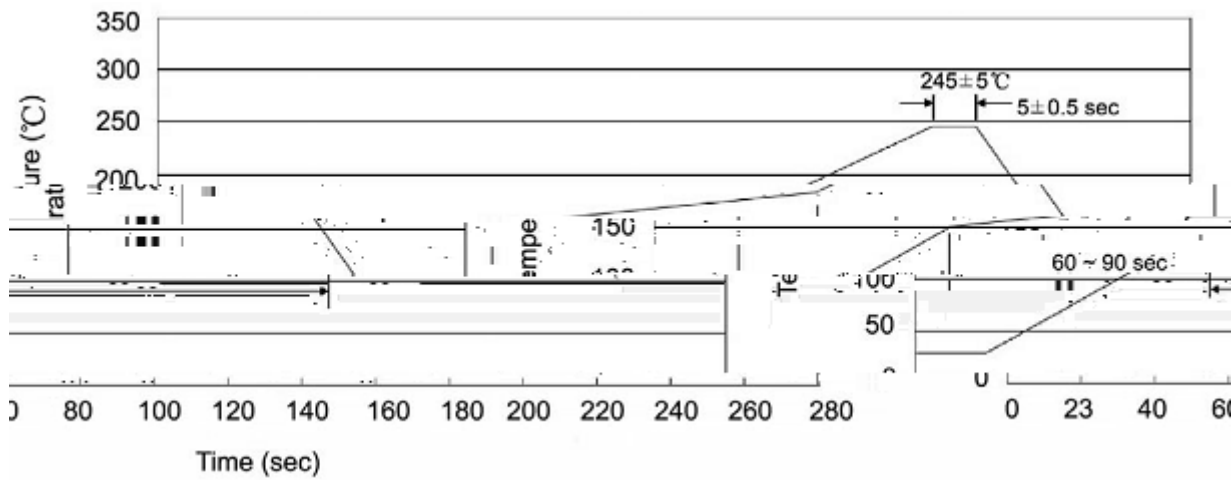

1. 温度曲线

2. 温度曲线

3. 温度曲线

4. 温度曲线

5. 温度曲线

6. 温度曲线

7. 温度曲线

8. 温度曲线

9. 温度曲线

10. 温度曲线

/ Resistance to Soldering Heat Test Conditions

1. 温度曲线

2. 温度曲线

3. 温度曲线

4. 温度曲线

5. 温度曲线

6. 温度曲线

7. 温度曲线

8. 温度曲线

9. 温度曲线

10. 温度曲线

/ Packaging SPEC.

1. 温度曲线

2. 温度曲线

3. 温度曲线

4. 温度曲线

5. 温度曲线

6. 温度曲线

7. 温度曲线

8. 温度曲线

9. 温度曲线

10. 温度曲线

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ρ ×8	180×120×180	390×385×205

/ Notices