


/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-120	V
Collector to Emitter Voltage	V_{CEO}	-120	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-1.5	A
Collector Current – Continuous(Pulse)	I_{CP}	-3.0	A
Collector Power Dissipation	P_C	1.8	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	


/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C = -50\mu A$	-120			V
Collector to Base Breakdown Voltage	V_{CEO}	$I_C = -1.0mA$	-120			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E = -50\mu A$	-5.0			V
Collector Cut-Off Current	I_{CBO}	$V_{CB} = -100V$			-1.0	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB} = -4.0V$			-1.0	μA
DC Current Gain	h_{FE}	$V_{CE} = -5.0V$ $I_C = -0.1A$	60		320	
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -1.0A$ $I_B = -0.1A$			-2.0	V
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = -1.0A$ $I_B = -0.1A$			-1.5	V
Transition Frequency	f_T	$V_{CE} = -5.0V$ $f = 30MHz$ $I_E = 0.1A$		50		MHz
Collector output capacitance	C_{ob}	$V_{CB} = -10V$ $f = 1.0MHz$ $I_E = 0$		30		pF

/ Package Dimensions

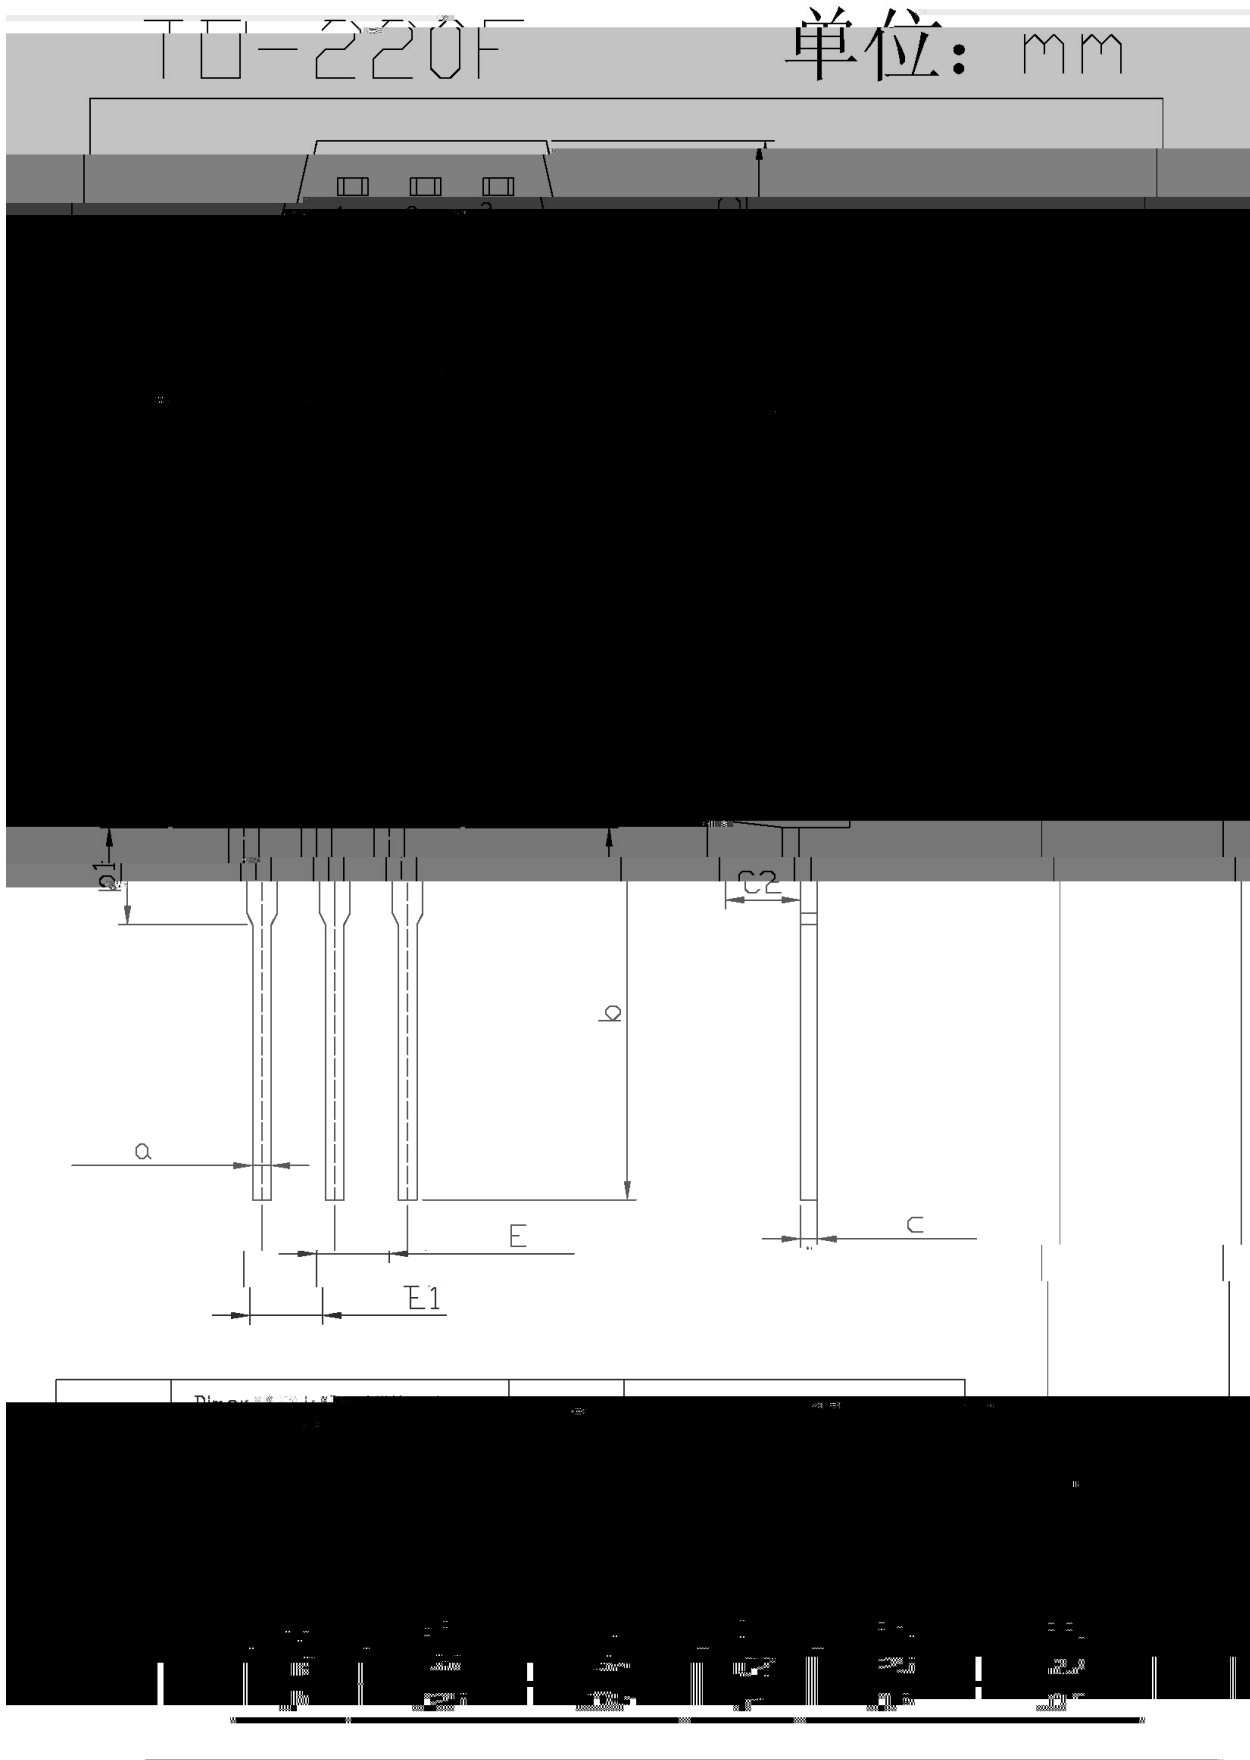

/ Marking Instructions

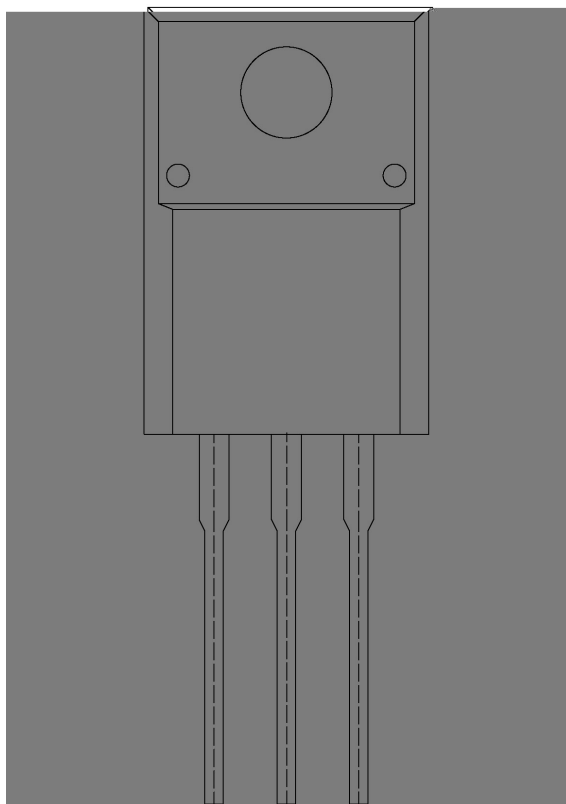

BR
B1353

