


Silicon PNP transistor in a TO-92LM Plastic Package.

Complementary pair with 2SD756.

Low frequency high voltage amplifier.




PIN1	Base	PIN 2	Collector	PIN 3	Emitter
------	------	-------	-----------	-------	---------

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-120	V




TO-92LM

Unit: mm

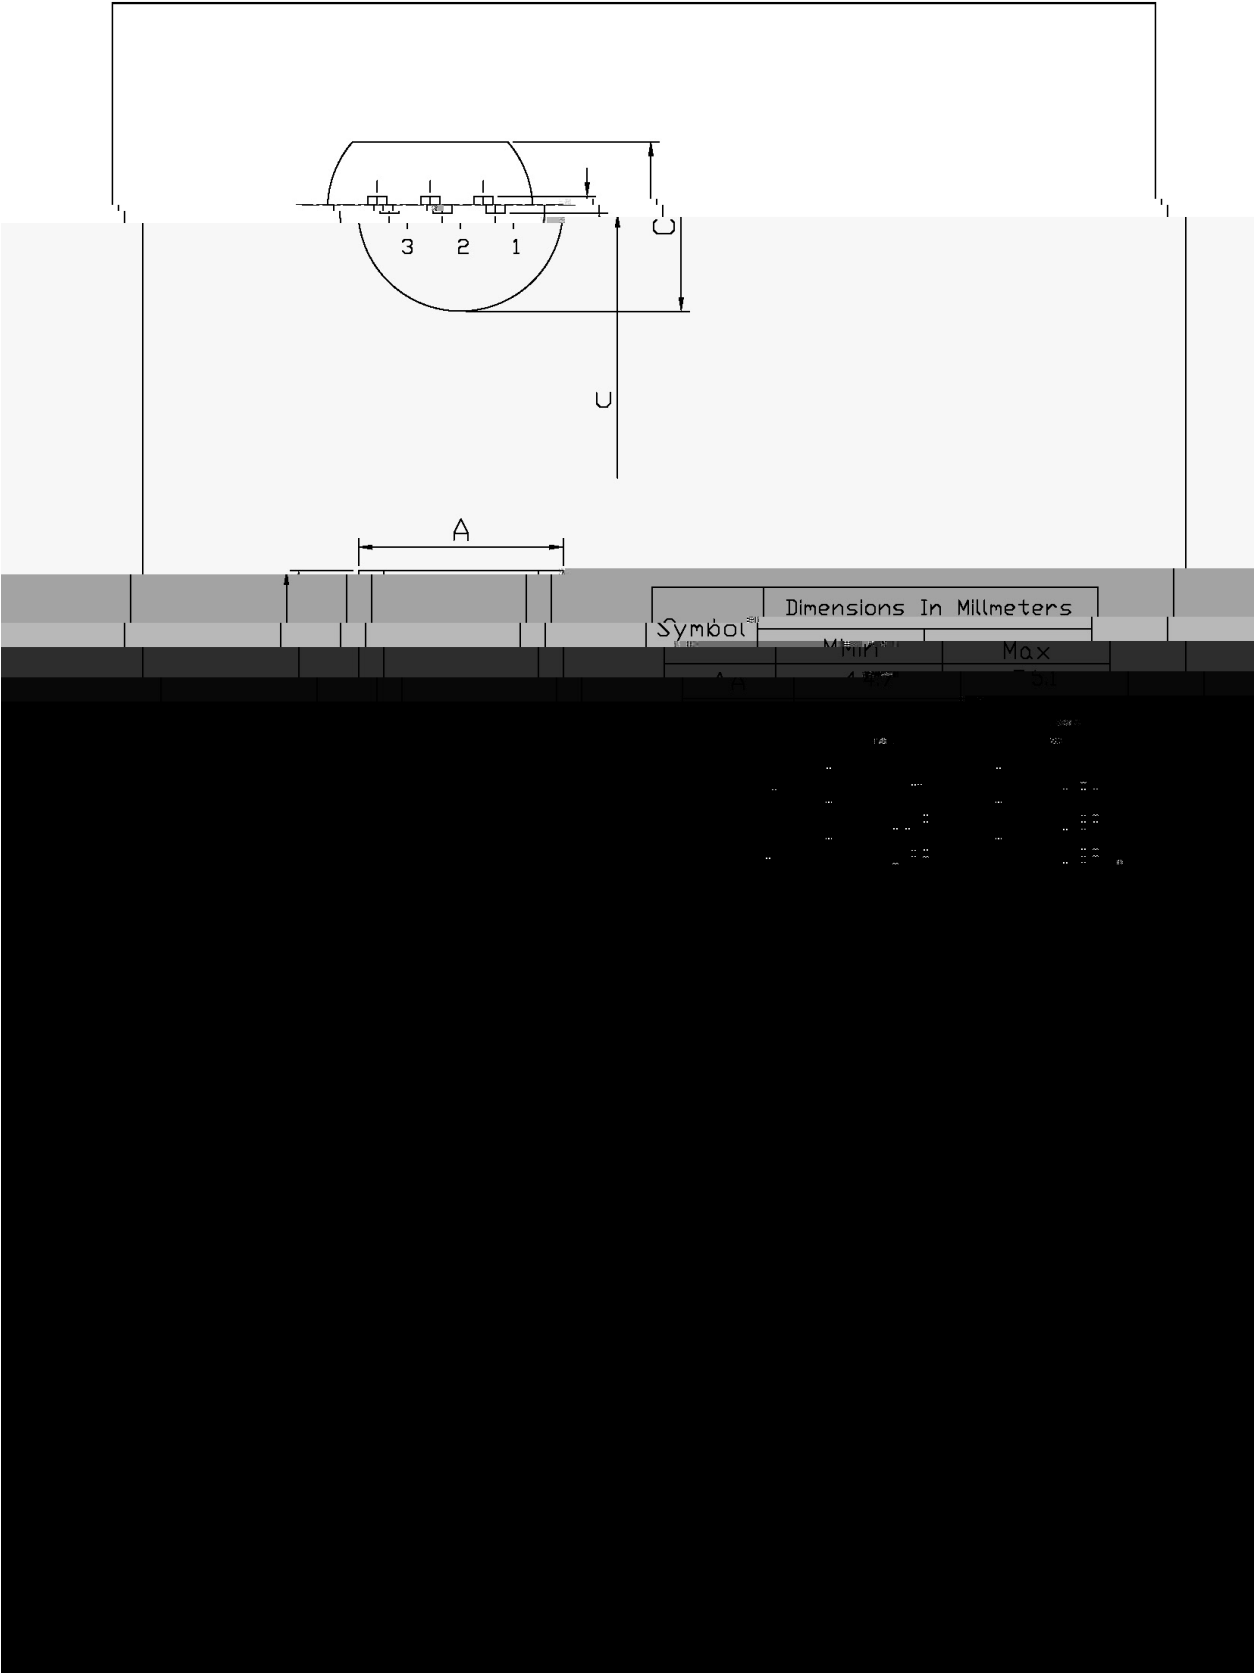

Symbol	Dimensions In Millimeters	
	Min	Max
A	1.30	1.50
U	0.80	1.00
U1	0.50	0.70
B	0.50	0.70
C	0.50	0.70
D	0.50	0.70
E	0.50	0.70
F	0.50	0.70
G	0.50	0.70
H	0.50	0.70
I	0.50	0.70
J	0.50	0.70
K	0.50	0.70
L	0.50	0.70
M	0.50	0.70
N	0.50	0.70
O	0.50	0.70
P	0.50	0.70
Q	0.50	0.70
R	0.50	0.70
S	0.50	0.70
T	0.50	0.70
U	0.50	0.70
V	0.50	0.70
W	0.50	0.70
X	0.50	0.70
Y	0.50	0.70
Z	0.50	0.70

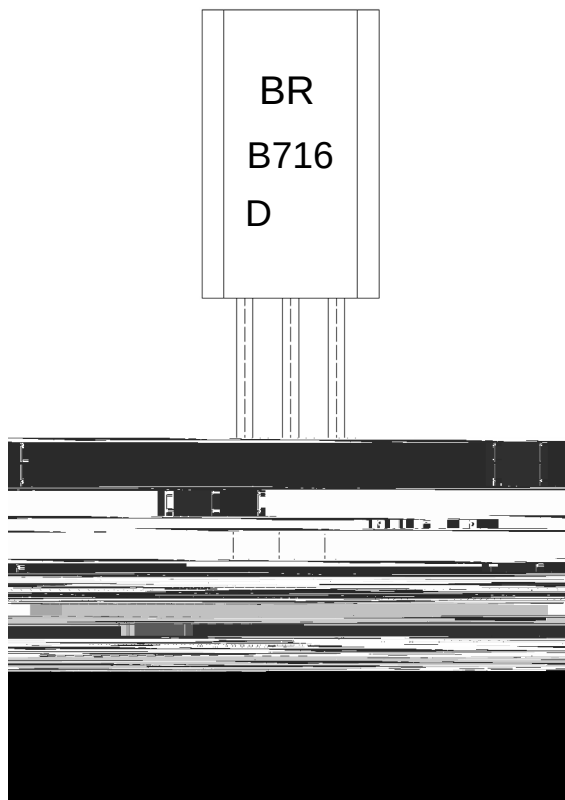


Note:

BR: Company Code.

B716: Product Type.

D: h_{FE} Classifications Symbol

****: Lot No. Code,code change with Lot No.

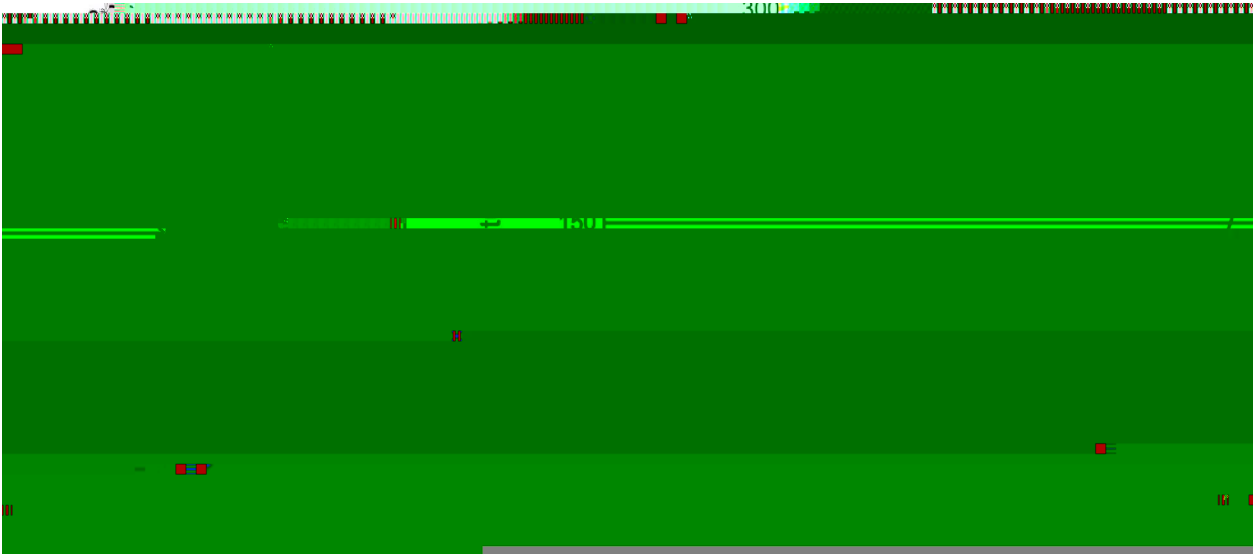

Note:

1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:255 5 , Duration:5 0.5sec.

3. Cooling Speed: 2~10 /sec.

1 25 150 60 90sec;

2 255 5 5 0.5sec;

3 2 10 /sec.

270 5 10 1 sec. Temp.:270±5 Time:10±1 sec

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

/ AMMO

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)		
	只 纸带	纸带 盒	纸带层 盒	盒 箱	只 箱	盒	箱	小箱