

/ Descriptions

TO-252                  PNP


/ Features

,  $h_{FE}$


/ Applications

3                                  ,                                  ,

/ Equivalent Circuit



/ Pinning

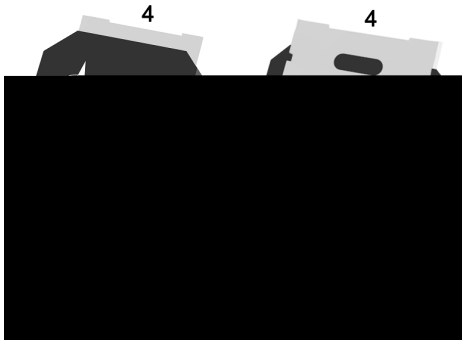


/  $h_{FE}$  Classifications & Marking


|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|  |  |  |  |  |

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

# / Electrical Characteristic Curve

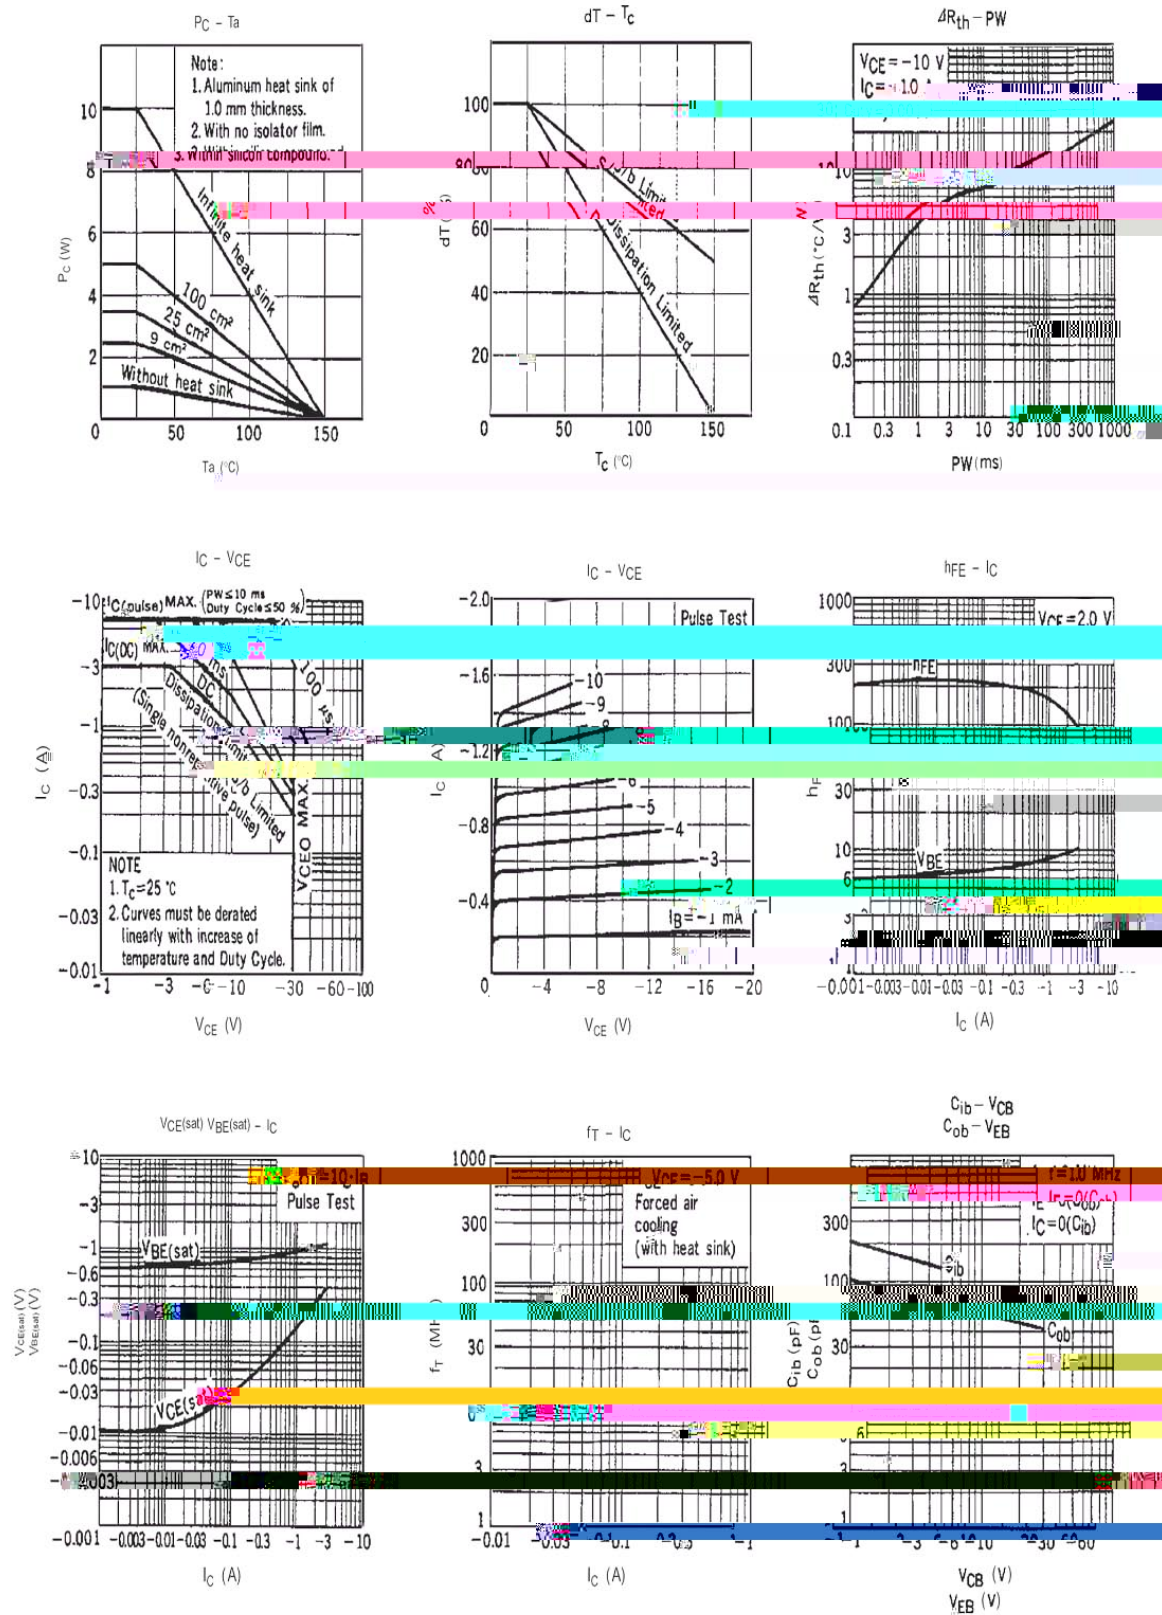

## / Package Dimensions

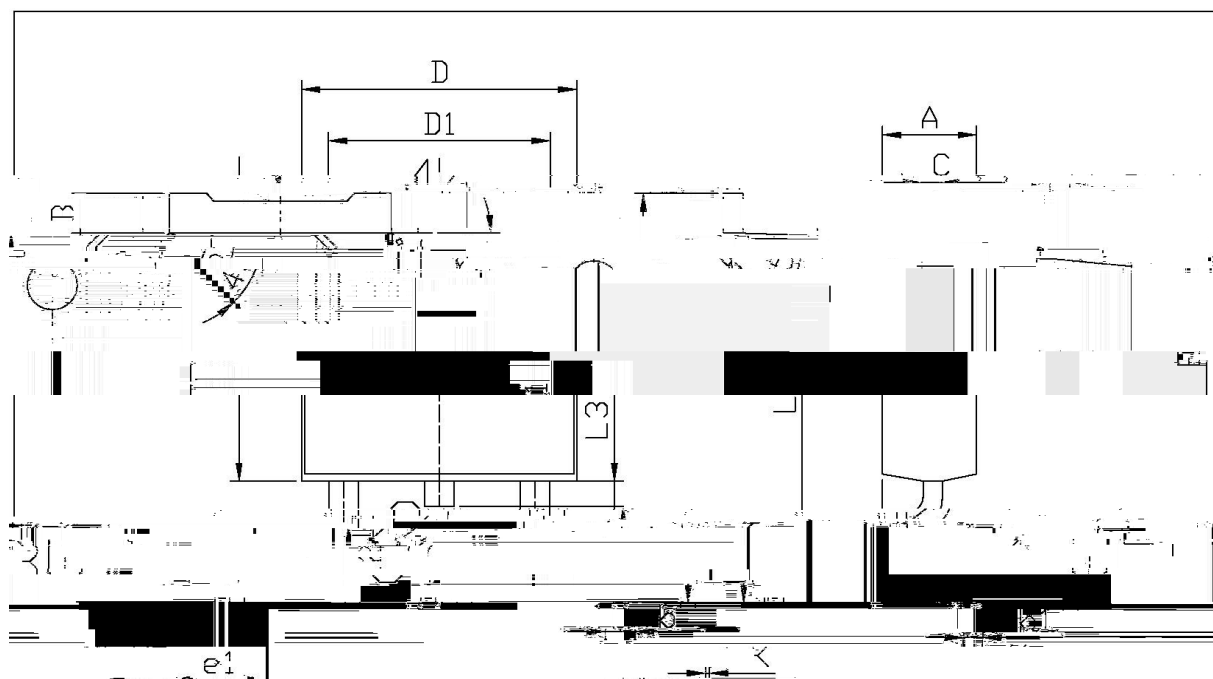


单位: mm

| Inches |      | Millimeters |      | Inches |      | Millimeters |     |
|--------|------|-------------|------|--------|------|-------------|-----|
| Min    | Max  | Min         | Max  | Min    | Max  | Min         | Max |
| B      | 0.95 | 2.25        | e1   | 2.24   | 2.34 |             |     |
| b      | 0.70 | 0.90        | e2   | 4.43   | 4.73 |             |     |
| b1     | 0.45 | 0.55        | h1   | 0.95   | 1.35 |             |     |
|        | 0.40 | 0.55        | 1.20 | 1.35   | 0.60 |             |     |
|        | 0.00 | 0.65        | 6.75 | 1.35   | 0.60 |             |     |
|        | 0.00 | 0.10        | D1   | 5.10   | 5.50 |             |     |

0-252

/ Marking Instructions

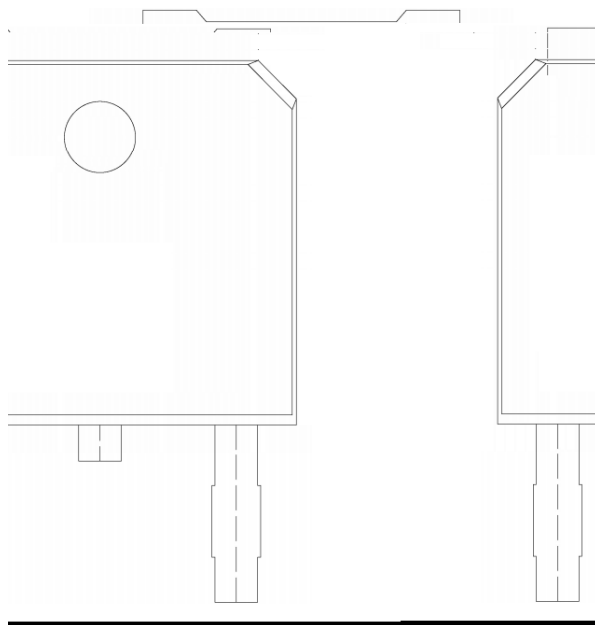

BR

B772D

P:

$h_{FE}$

\*\*\*\*

2SB772D