

/ Descriptions

WR0553I ММ Ё SQS æ Ñ ы s ll 1 Silicon PNP transistor in a TO-220F Plastic Package.


/ Features

М ѓ я s l ѓ ѓ ll ã`Q l ' s
High V_{CEO} , large P_C .


/ Applications

ꢂꢂꢂ l ' Ẁ z / ѓ ð ы ð ꢂ ꢂꢂ
Power amplifier, TV vertical deflection output.

/ Equivalent Circuit



/ Pinning



PIN1 ꢂ Base PIN 2 ꢂ Collector PIN 3 ꢂ Emitter


/ h_{FE} Classifications & Marking

h_{FE} Classifications Symbol	Q	P
h_{FE} Range	60 140	100 240


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-200	V
Collector to Emitter Voltage	V_{CEO}	-150	V
Emitter to Base Voltage	V_{EBO}	-6.0	V
Collector Current - Continuous	I_C	-2.0	A
Collector Current – Continuous(Pulse)	I_{CP}	-3.0	A
Collector Power Dissipation	P_C	2.0	W
Collector Power Dissipation	$P_C(T_c=25^\circ C)$	30	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 ~ 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C = -500\mu A, I_E = 0$	-200			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C = -5.0mA, I_B = 0$	-150			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E = -5.0mA, I_B = 0$	-6.0			V

/ Electrical Characteristic Curve

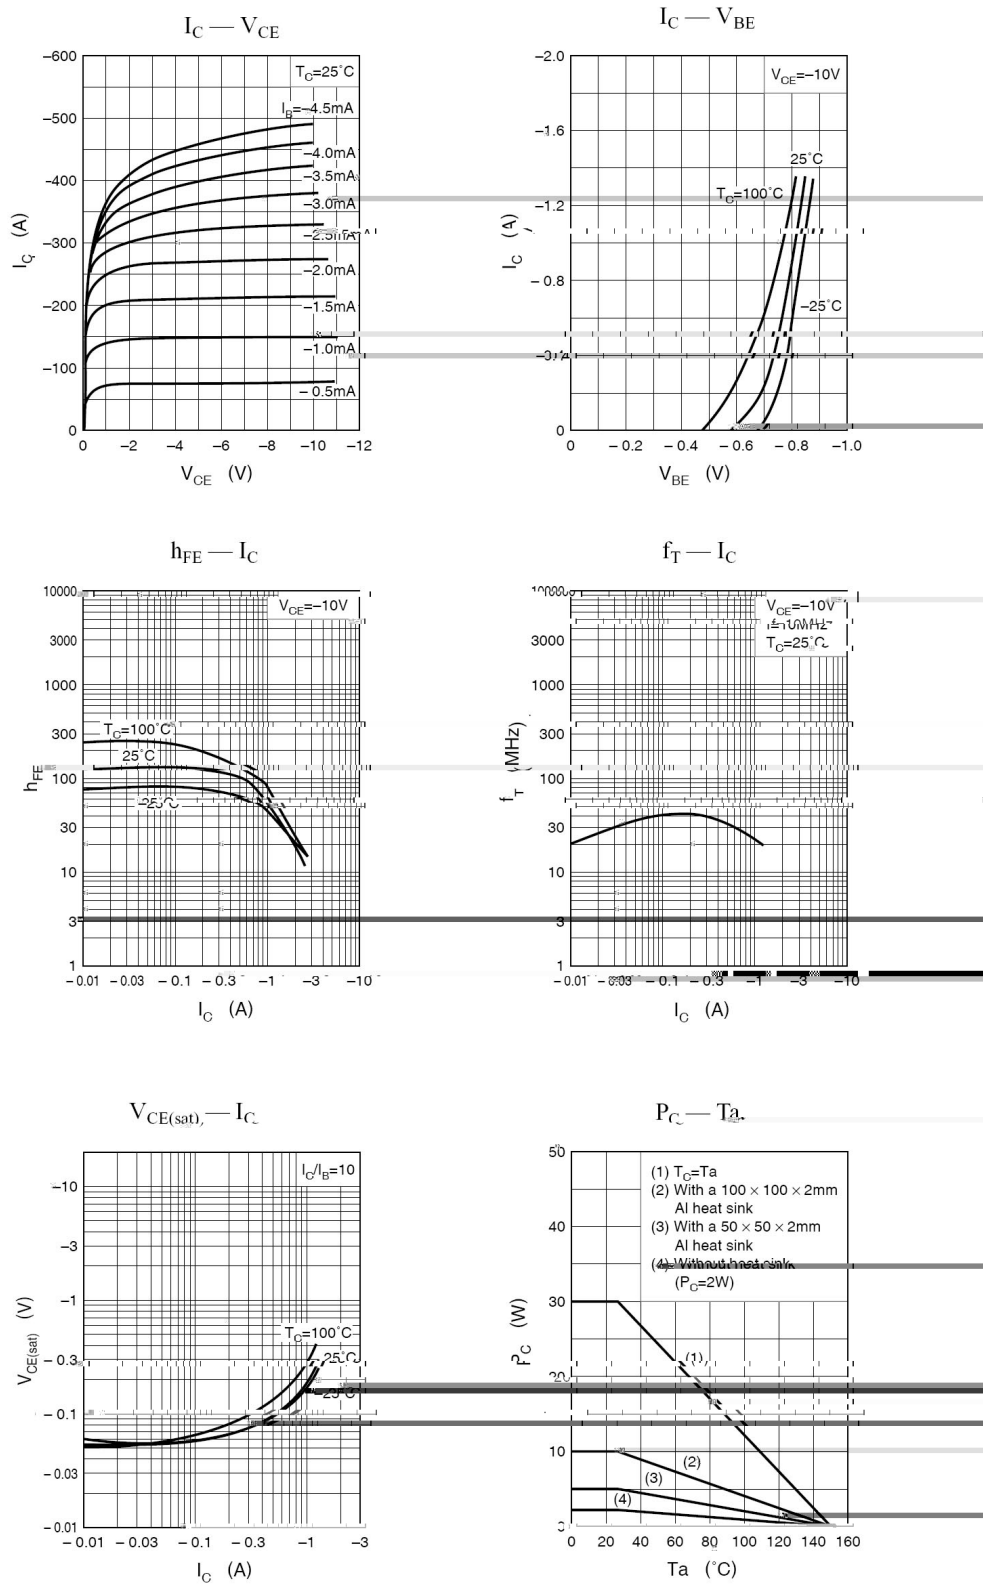

/ Marking Instructions

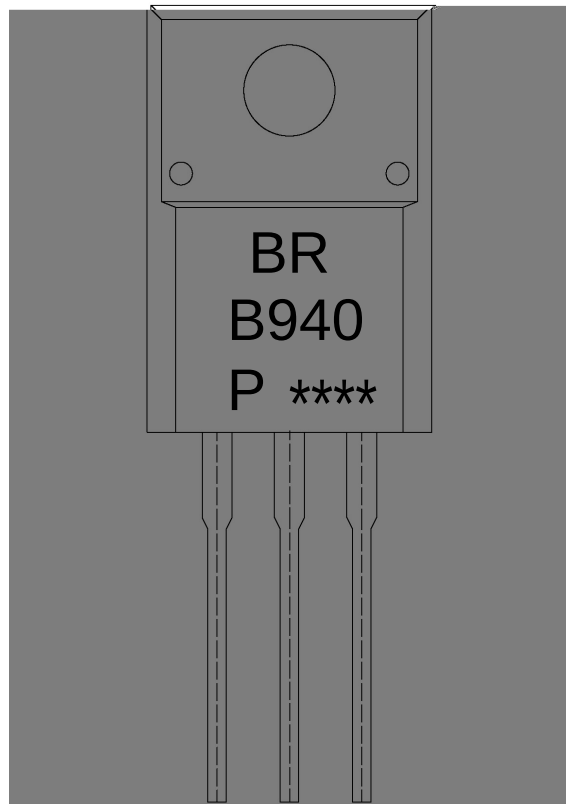

ب"خ

EU χ

 $E < 73 \text{ \AA}$ $S=$

-----X

Note:

BR:

B940:

P:

****.

ᐃᐃ ᐱ ᐃ ᐅ

ᠬᠡᠳᠡᠨᠢᠨᠠᠨ

$$k_{IH} \approx 6 \text{ } \mu\text{g}$$
$$\mathbb{H} \cdot f \check{\eta}^N \Gamma_D \quad \quad \quad \mathbb{I} \cdot f \check{\eta}^N \Psi \rho$$


Company Code.

Product Type.

h_{FE} Classifications Symbol

Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

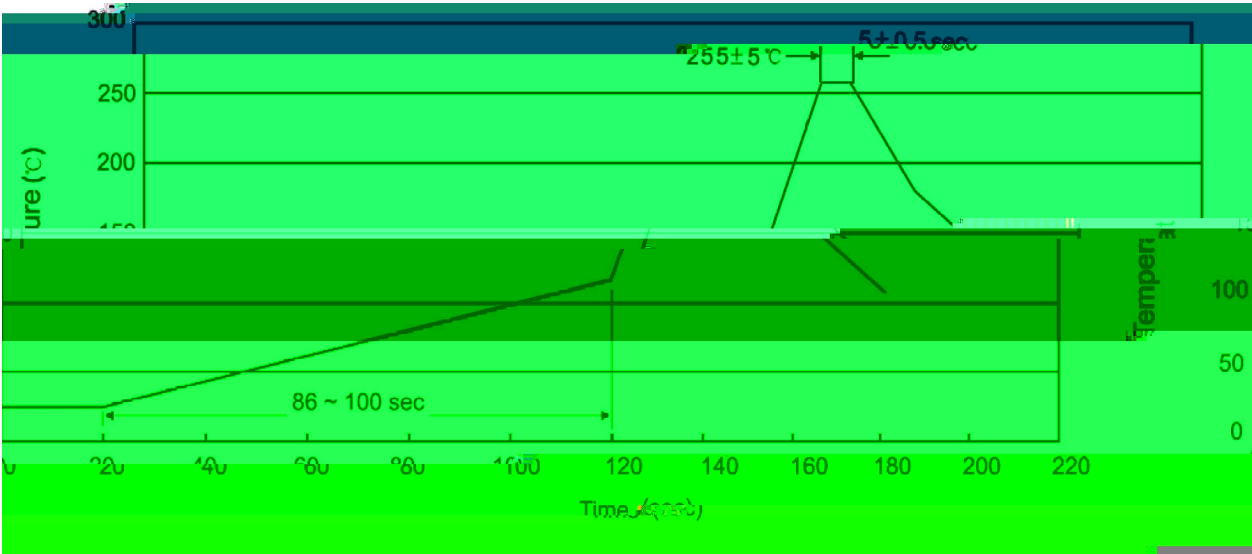

1. Preheating: 25~150 °C, Time: 60~90sec;
2. Peak Temp.: 255±5 °C, Duration: 5±0.5sec;
3. Cooling Speed: 2~10 °C/sec.

- Note:
1. Preheating: 25~150 °C, Time: 60~90sec.
2. Peak Temp.: 255±5 °C, Duration: 5±0.5sec.
3. Cooling Speed: 2~10 °C/sec.

/ Resistance to Soldering Heat Test Conditions

□ °C 270±5 °C 10±1 sec. Temp.: 270±5 Time: 10±1 sec

/ Packaging SPEC.

“Q” “Y” “E” / BULK

Package Type	Units					Dimension (unit mm ³)		
	Units/Bag	Bags/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Bag	Inner Box	Outer Box
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195