


Silicon NPN transistor in a TO-92 Plastic Package.

High V_{CEO} , high f_T , Complementary pair with 2SA1018(A).


General amplifier applications.



PIN1 Base PIN 2 Collector PIN 3 Emitter

h_{FE} Classifications Symbol	P	Q	R
h_{FE} Range	30~100	60~150	100~220

Parameter	Symbol		Rating	Unit
Collector to Base Voltage	V_{CBO}	2SC1473	250	V
		2SC1473A	300	
Collector to Emitter Voltage	V_{CEO}	2SC1473	200	V
		2SC1473A	300	

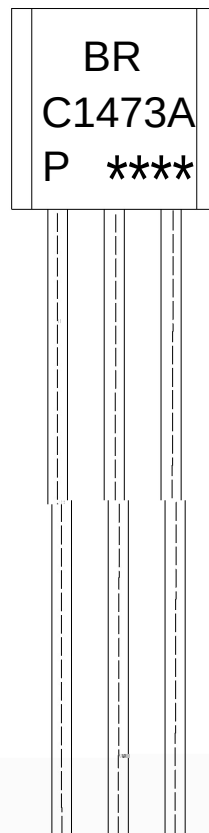


Note:

BR: Company Code.

C1473A: Product Type.

P: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

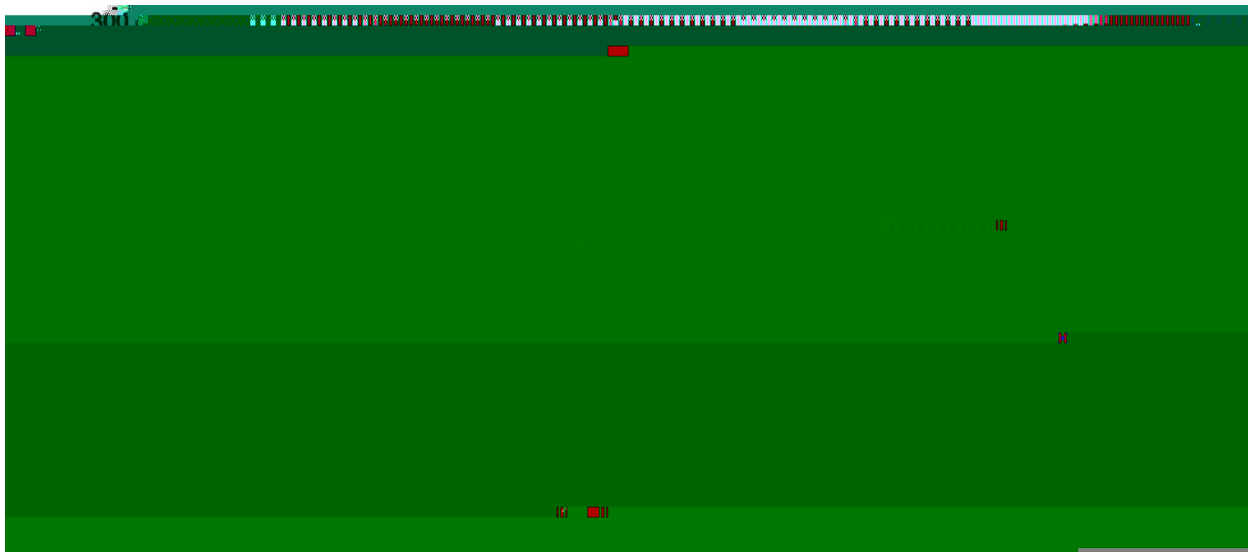
Note:

- | | | | | | |
|---|-----|-----|----|---------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255 | 5 | 5 | 0.5sec; | 2.Peak Temp.:255 5 , Duration:5 0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

270	5	10	1 sec.	Temp:270±5	Time:10±1 sec
-----	---	----	--------	------------	---------------

/ BULK

Package Type	Units					Dimension (unit mm3)		
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

/ AMMO

Package Type	Units					Dimension (unit mm3)	
	Units/tape /	Tape/Inner Box /	Rows/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Inner Box	Outer Box
TO-92	3,000	1	120	10	30,000	328×230×42	480×346×235
							547×407×268