


TO-92 NPN Silicon NPN transistor in a TO-92 Plastic Package.

, 2SA933A
 Small base output capacitance, complementary pair with 2SA933A.

General purpose amplifier.




PIN1 Base PIN 2 Collector PIN 3 Emitter

h_{FE} Classifications Symbol	Q	R	S
h_{FE} Range	120~270	180~390	270~560

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	60	V
Collector to Emitter Voltage	V_{CEO}	50	V
Emitter to Base Voltage	V_{EBO}	7.0	V
Collector Current - Continuous	I_C	150	mA
Collector Power Dissipation	P_C	300	mW
Junction Temperature	T_J	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C=50\mu A$ $I_E=0$	60			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C=1.0mA$ $I_B=0$	50			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E=50\mu A$ $I_C=0$	7.0			V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=60V$ $I_E=0$			0.1	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=7.0V$ $I_C=0$			0.1	μA

DC Current Gain hFE0.5 0 0 10.5 266.34 378.6803 Tm-0.000VCB

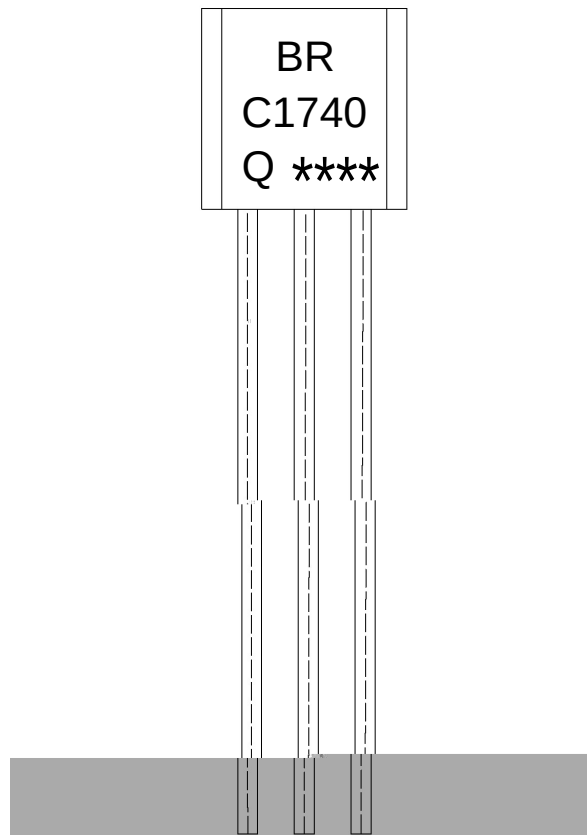

BR:

C1740

Q: h_{FE}

Note:

BR: Company Code.

C1740: Product Type.

Q: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

