


Rev.E Mar.-2016



<http://www.fsbrec.com>


/ Electrical Characteristic Curve

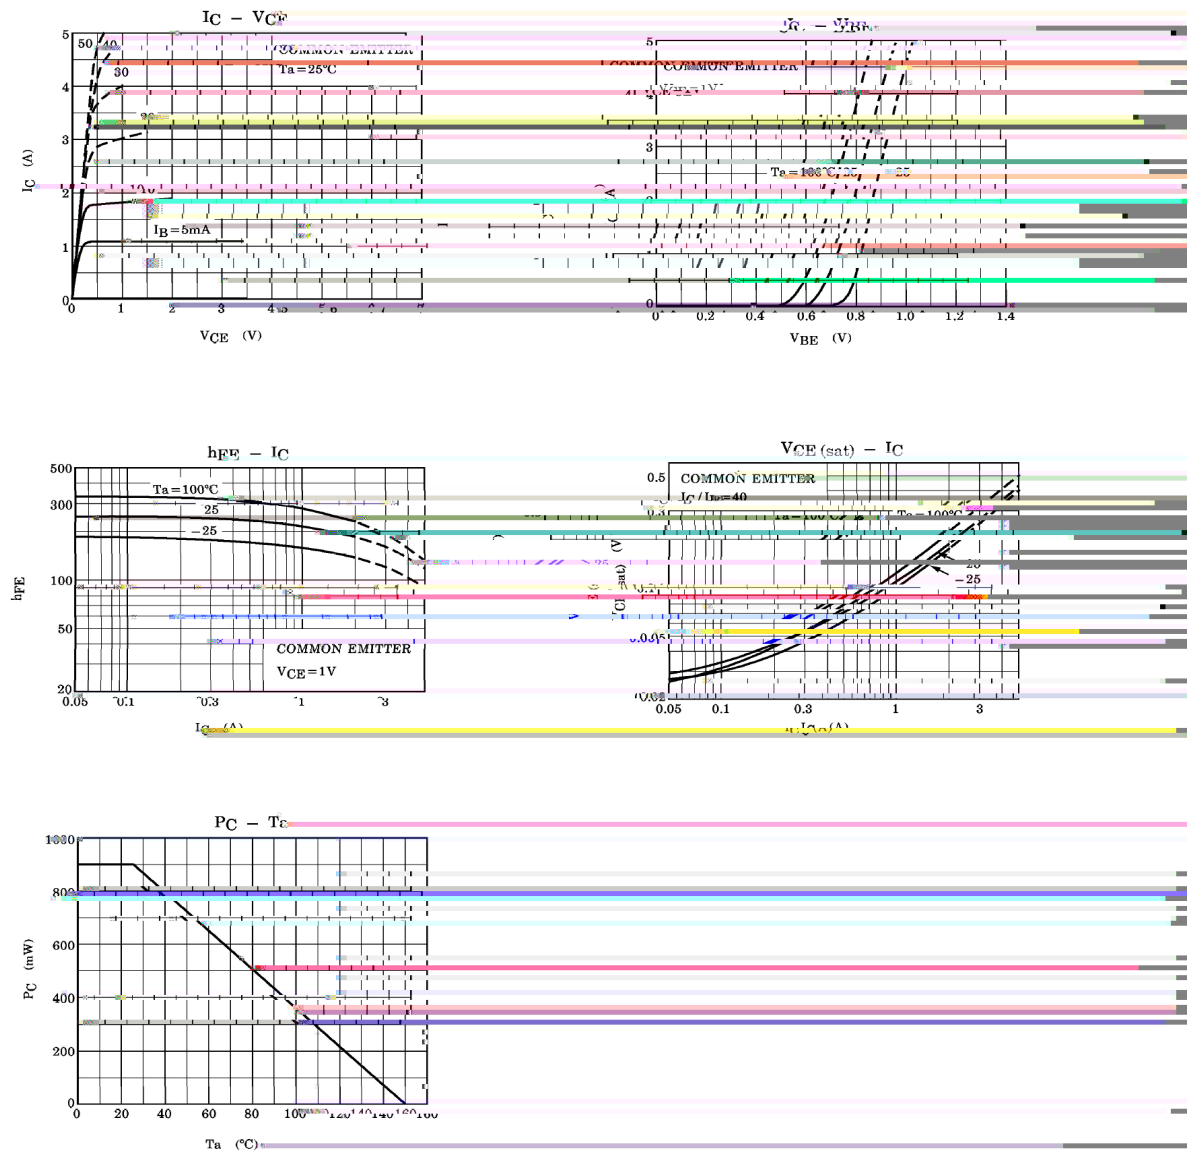


/ PackageDimensions

T0-92LM

Unit: mm

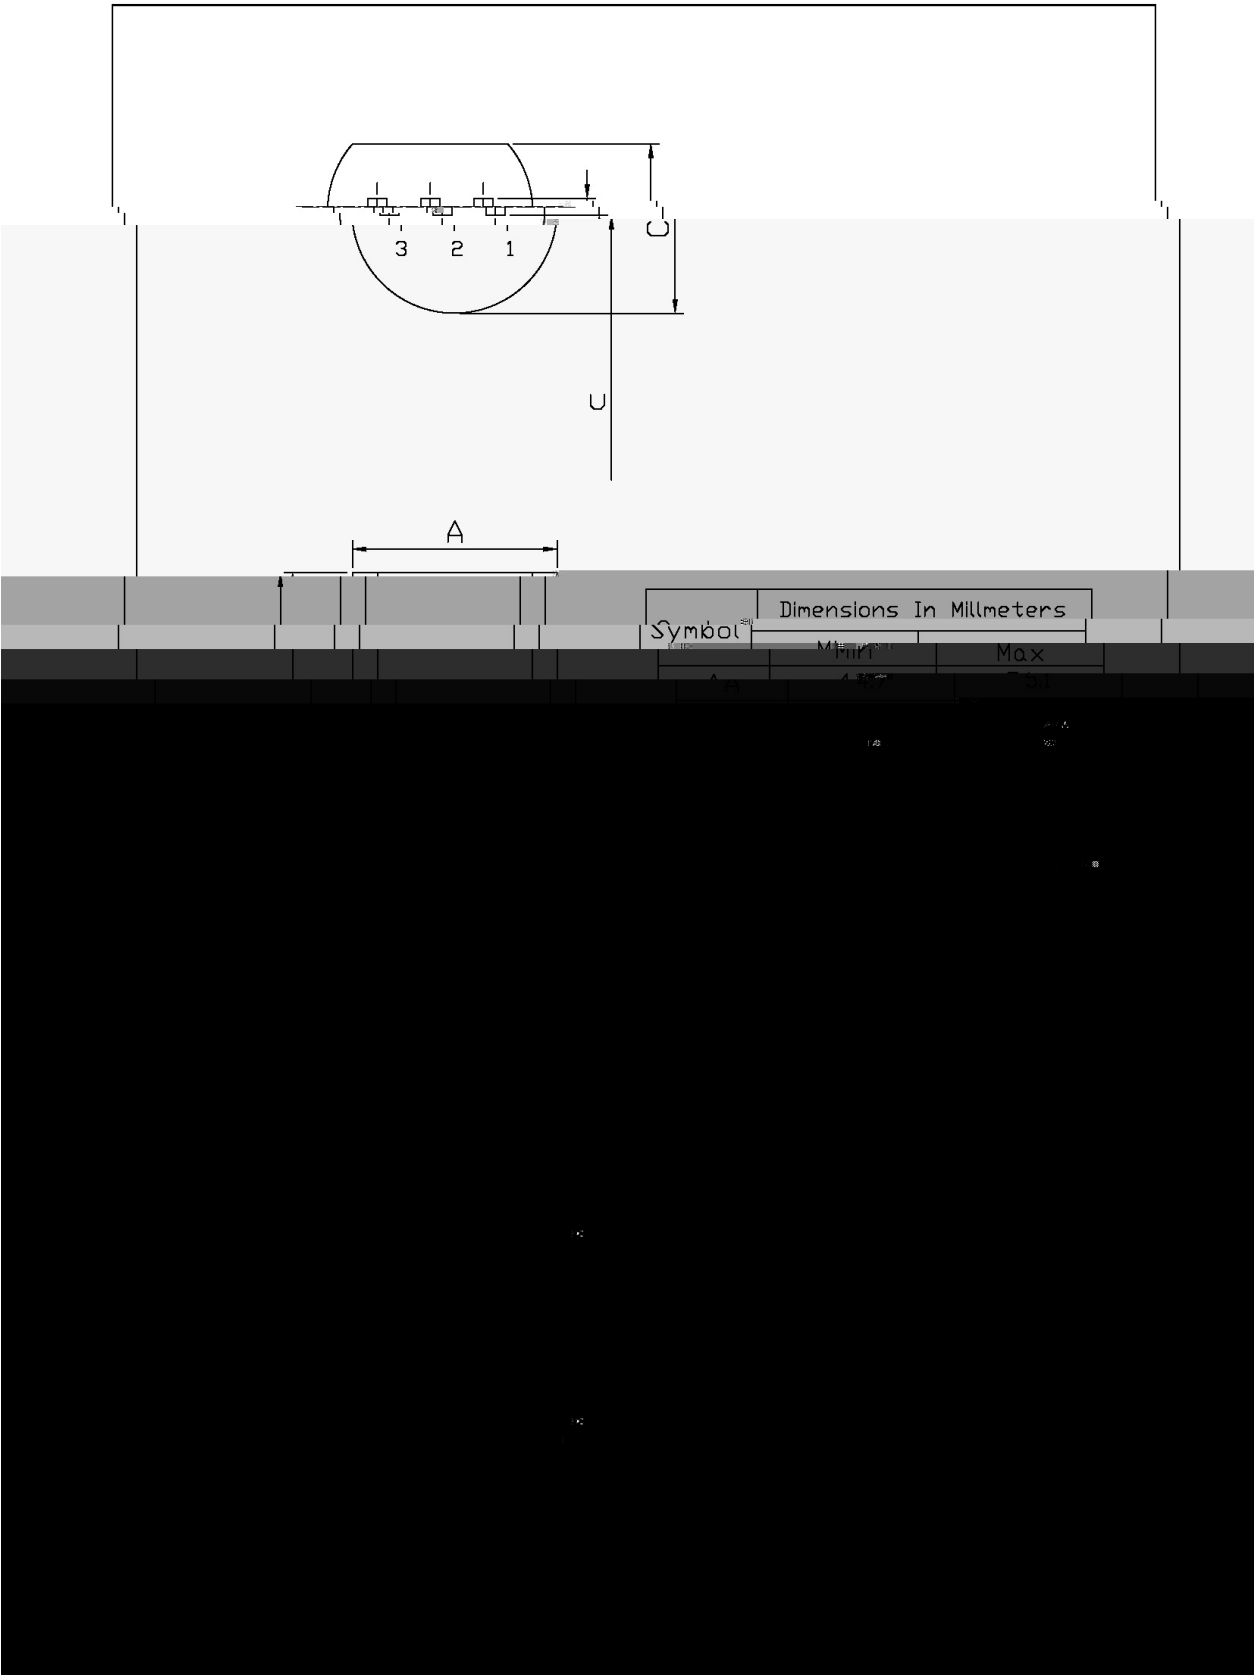

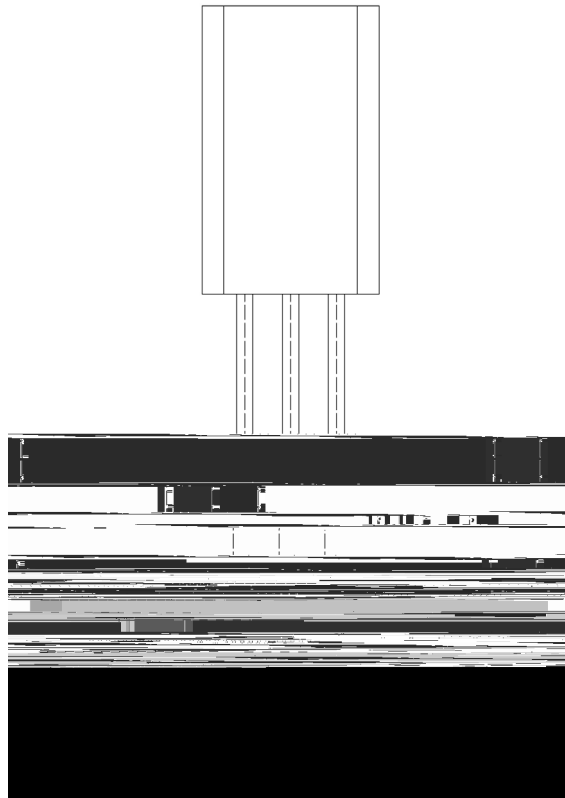

() / Temperature Profile for Dip Soldering(Pb-Free)



Note:			
1	25 150	60 90sec;	1.Preheating:25~150 , Time:60~90sec.
2	255±5	5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3	2 10	/sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp.:270±5	Time:10±1 sec
-------	-----------	-------------	---------------

/ Packaging SPEC.

/ BULK