

/ Descriptions


TO-126F NPN

/ Features


C_{re} , f_T

/ Applications

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)


						μ
						μ

/ Electrical Characteristic Curve

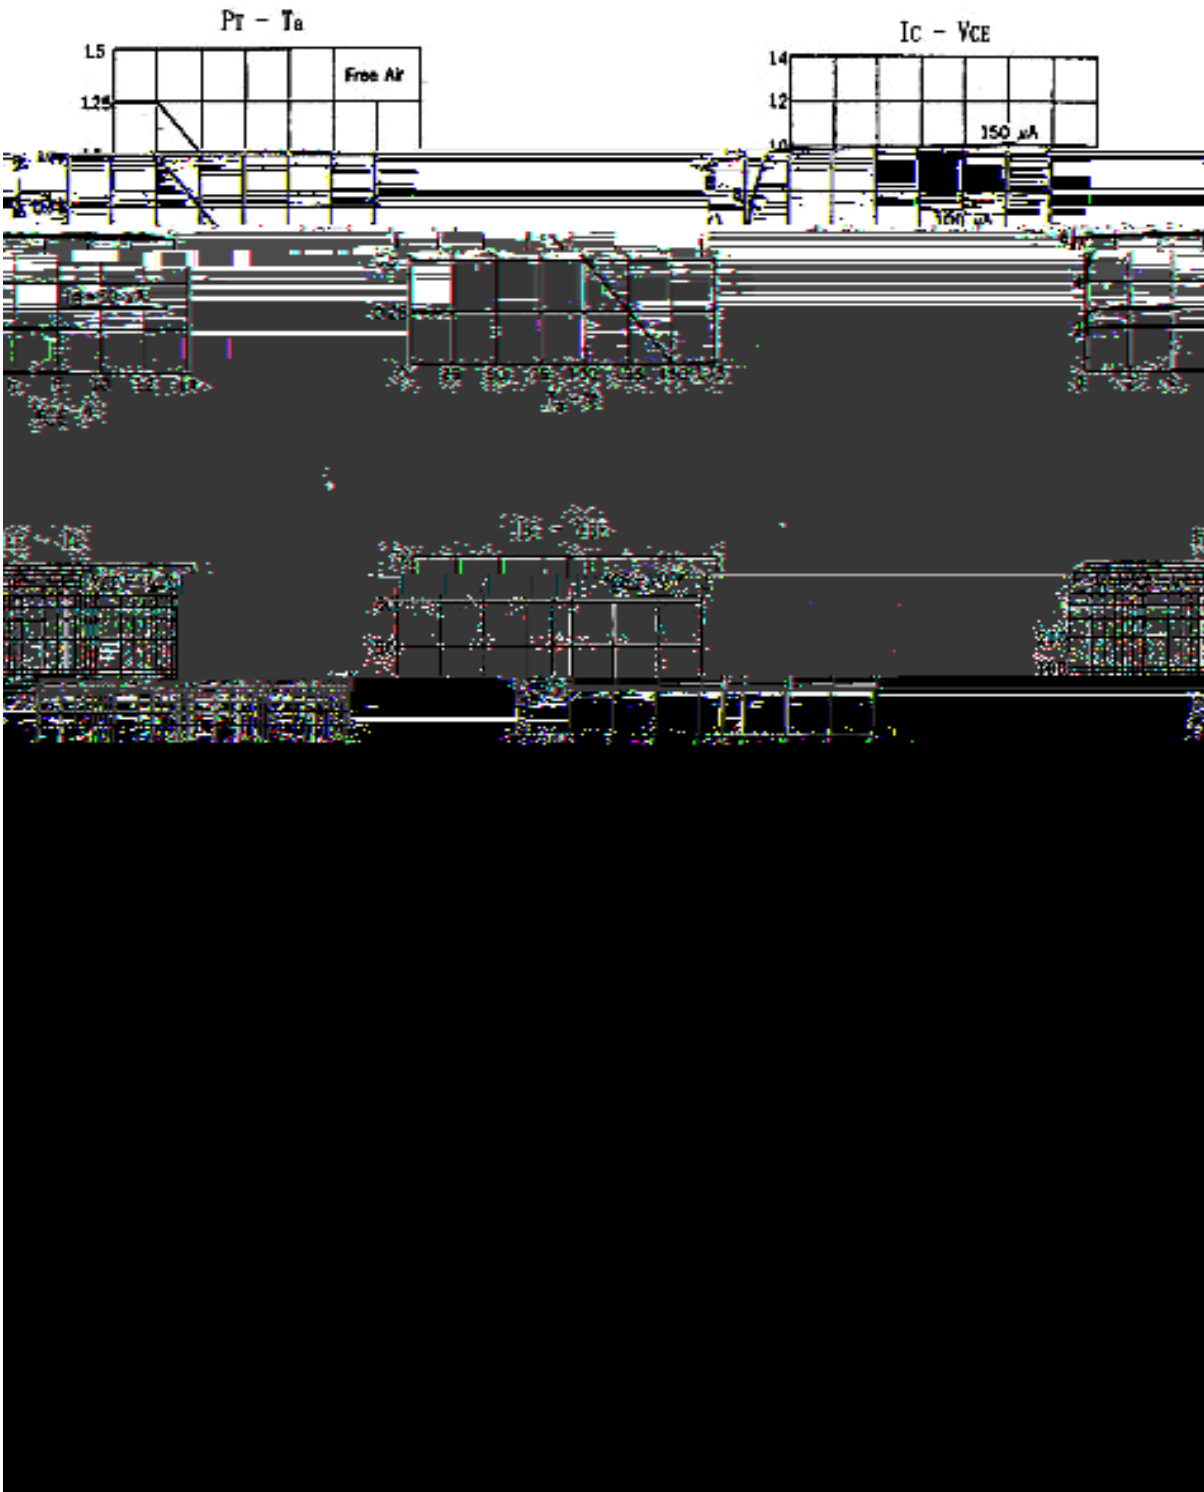


/ Package Dimensions

TU-126F 单位: mm

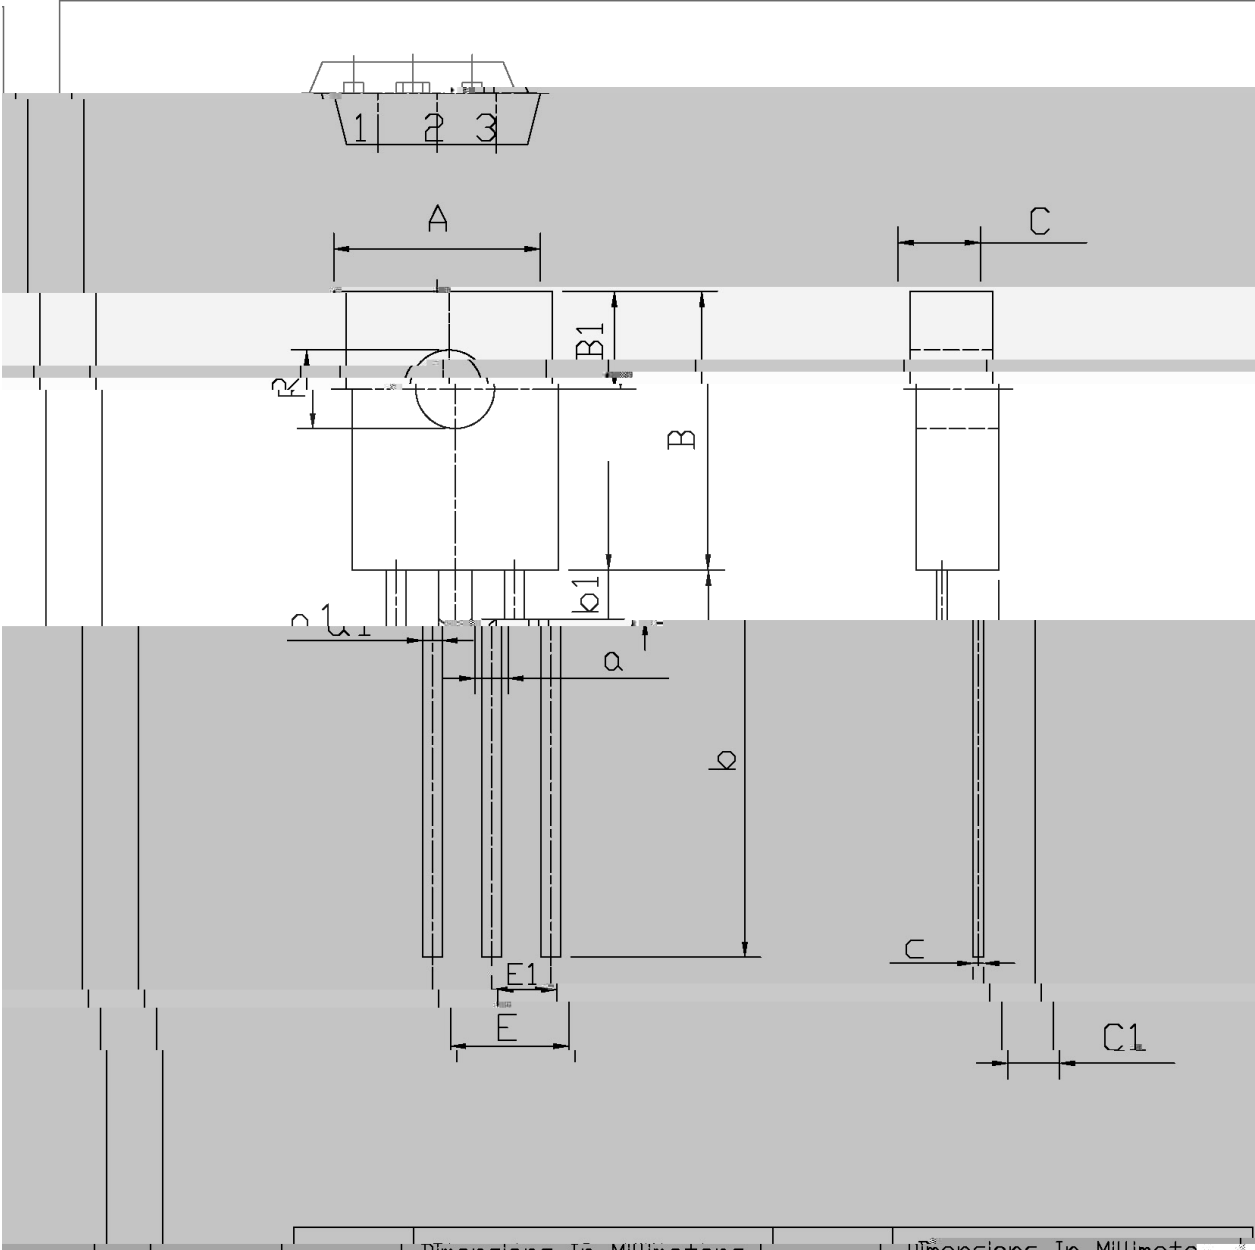


Max	Min	Max	Min
7.8	7.8	8.2	7.8
10.8	10.8	11.2	10.8
4.4	4.4	4.4	4.4

/ Marking Instructions

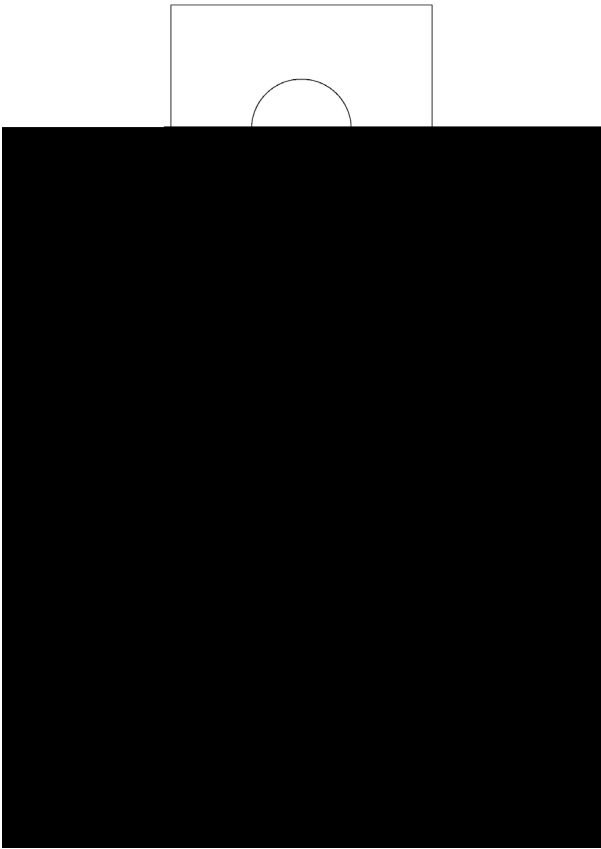

BR
C2688
N: h_{FE}

() / Temperature Profile for Dip Soldering(Pb-Free)

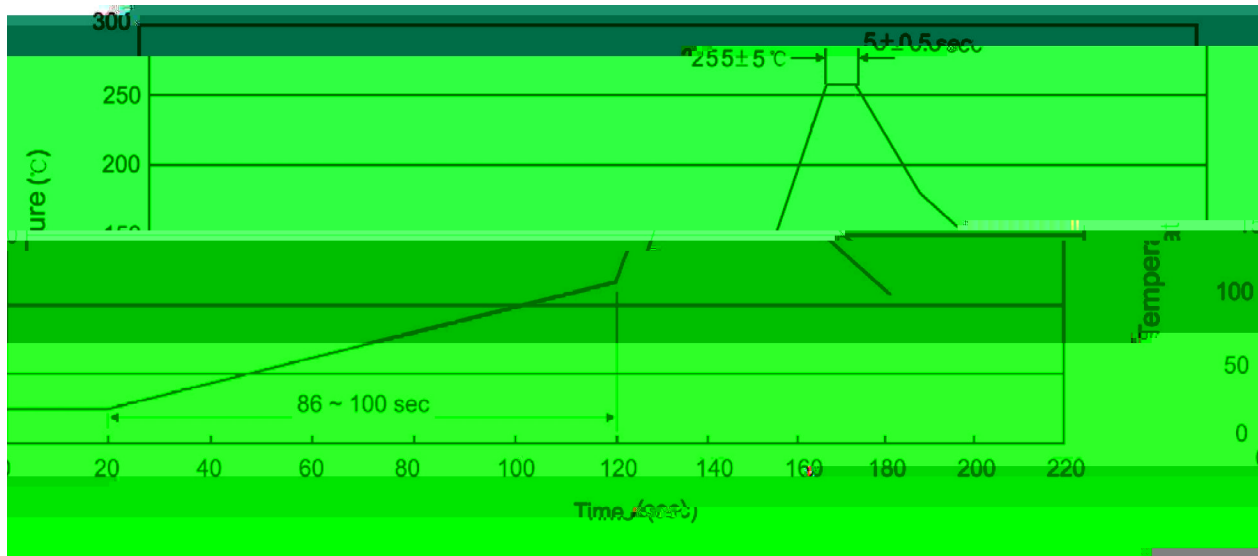 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-126/F	500	6	3,000	5	15,000	135×190	237×172×102	560×245×195

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-126/F	65	26	1,690	5	8,450	532×31×5.6	555×164×50	575×290×180

/ Notices