
TO-92LM NPN Silicon NPN transistor in a TO-92LM Plastic Package.

:h_{FE}=100 320

High DC current gain: h_{FE}=100 320.

Audio frequency power amplifier applications.






PIN1 Base PIN 2 Collector PIN 3 Emitter

h_{FE} Classifications Symbol	O	Y
h_{FE} Range	100 200	160 320

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	30	V
Collector to Emitter Voltage	V_{CEO}	30	V
Emitter to Base Voltage	V_{EBO}	5.0	V

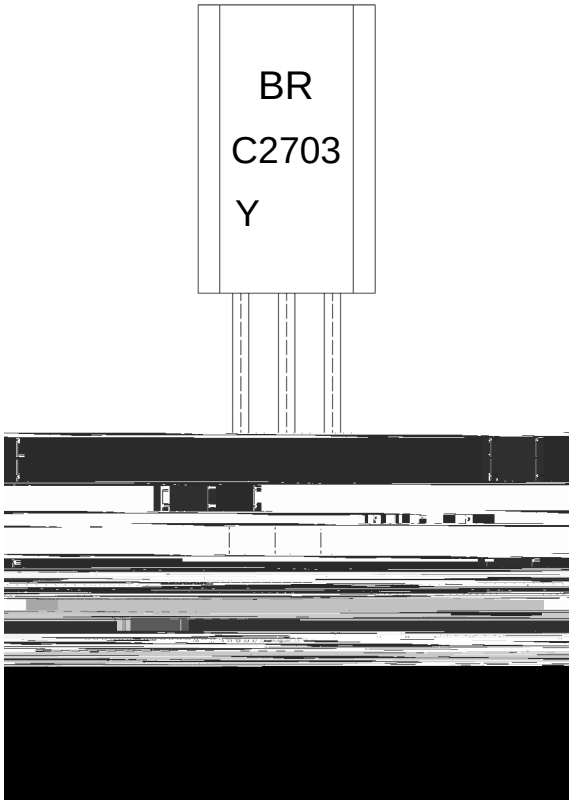

BR:


C2703

Y: h_{FE}

****

Note:

BR:	Company Code.
C2703:	Product Type.
Y:	h_{FE} Classifications Symbol
****:	Lot No. Code,code change with Lot No.

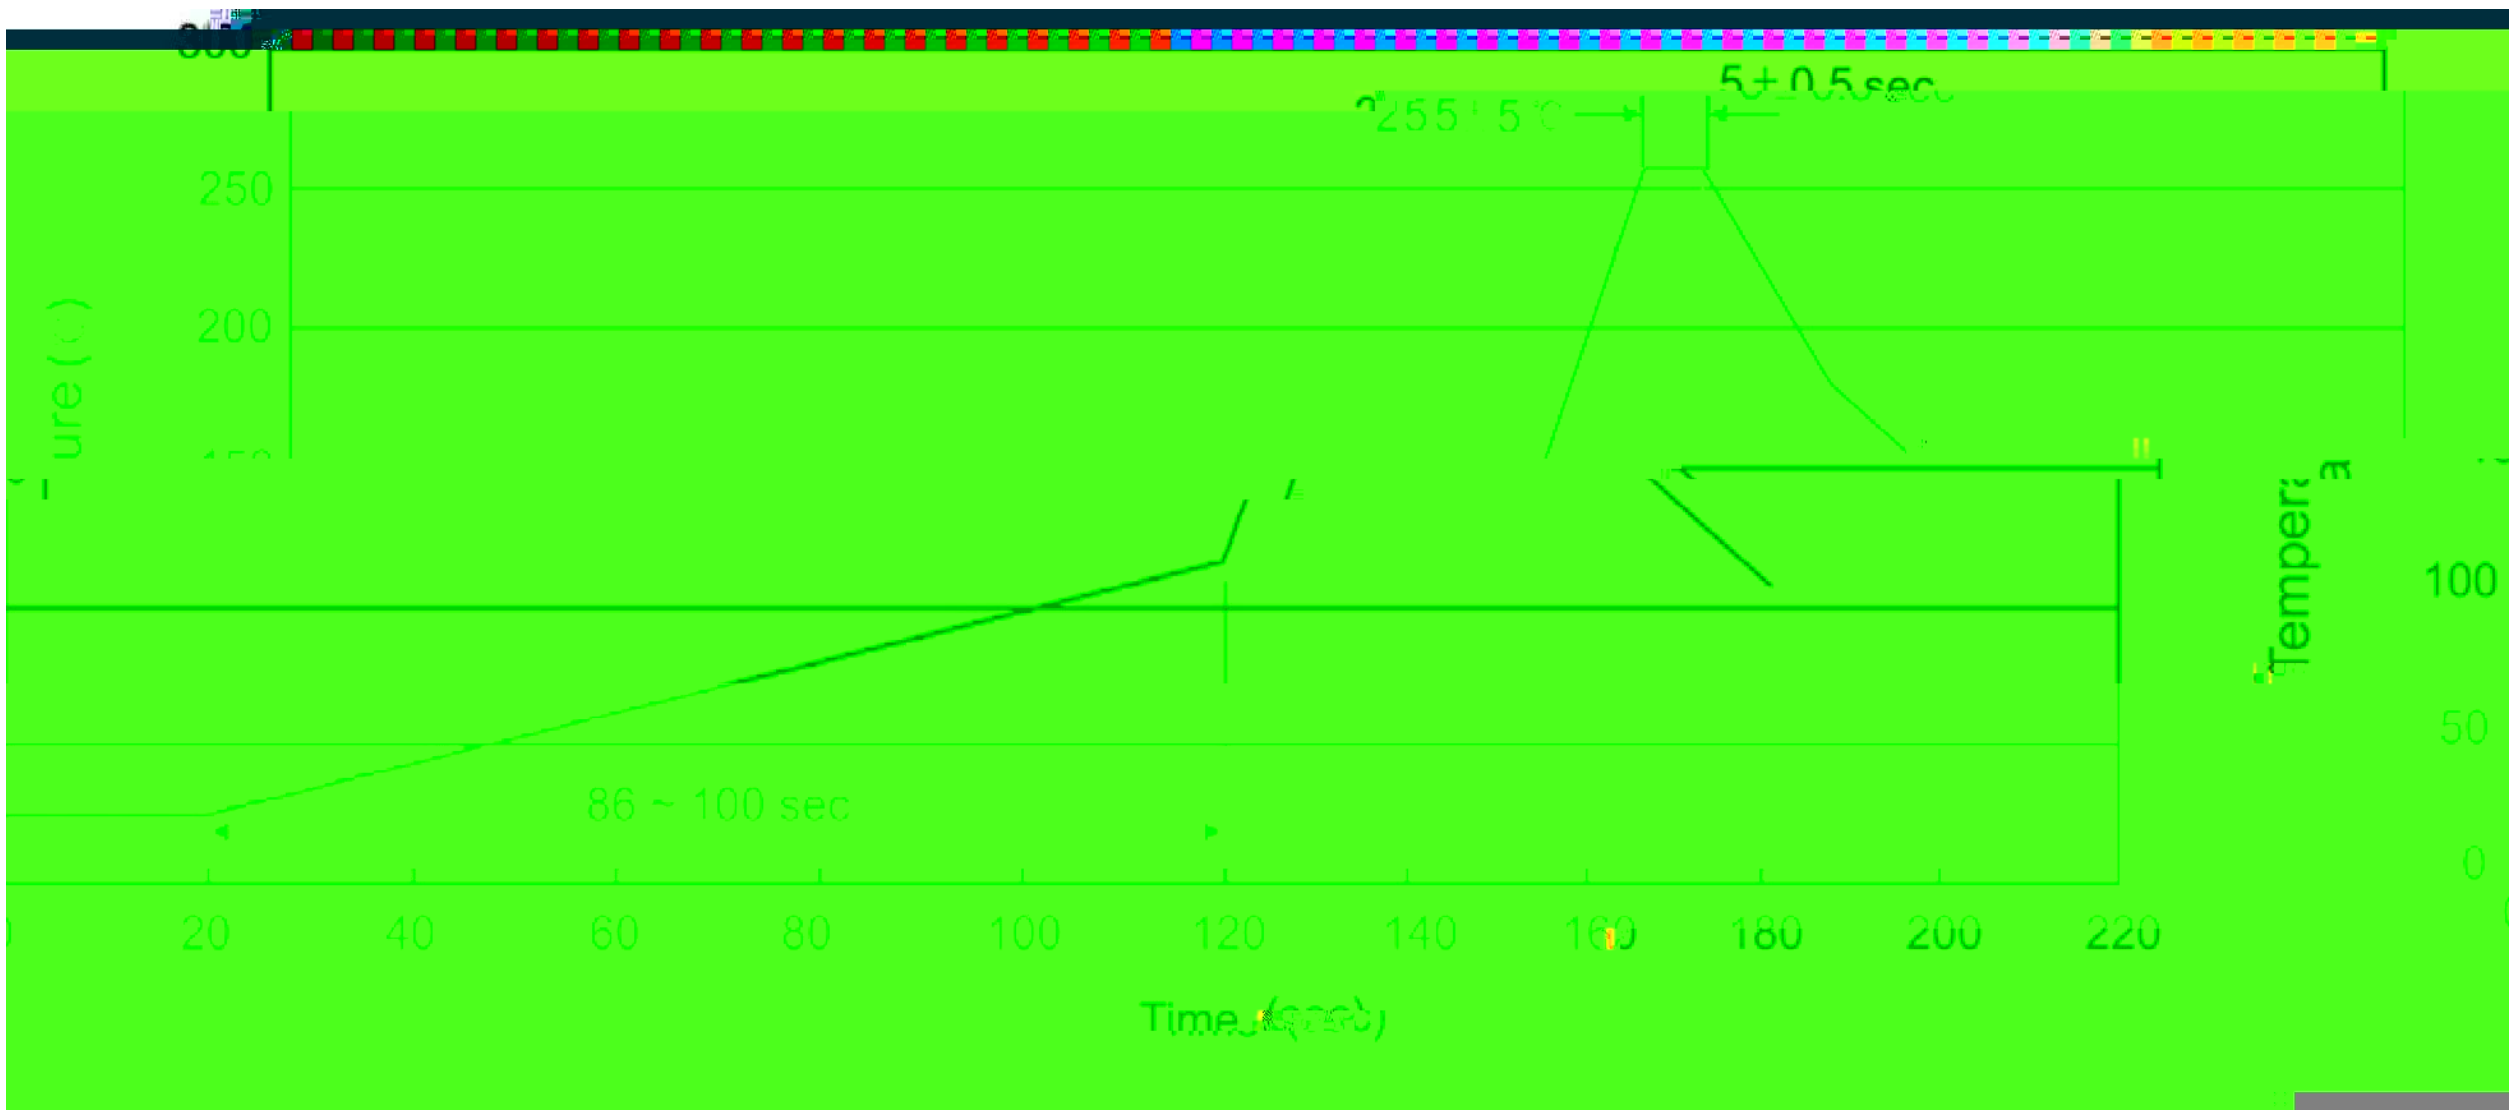

Note:

1 25 150 60 90sec; 1.Preheating:25~150 , Time:60~90sec.

2 255±5 5±0.5sec; 2.Peak Temp.:255±5 , Duration:5±0.5sec.

3 2 10 /sec. 3. Cooling Speed: 2~10 /sec.

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ BULK

ų ˙ œ ⅔ Æ ή