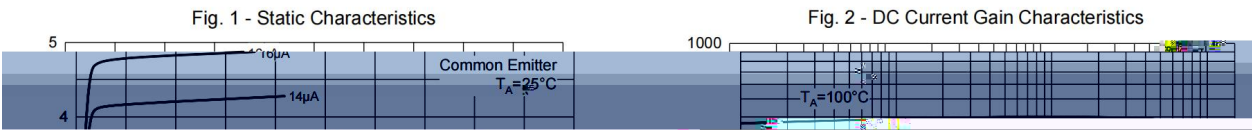


--	--	--	--	--	--

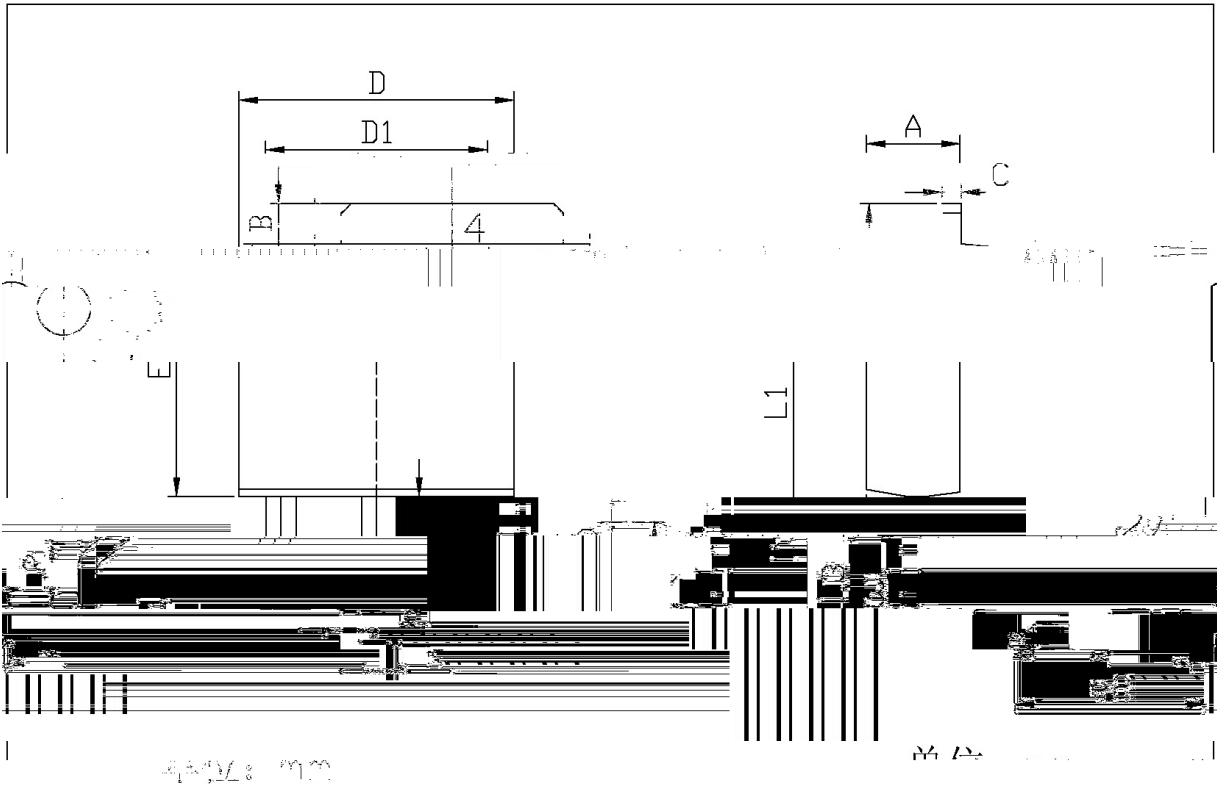
2SD1815







Rev.B Jan.-

/ Electrical Characteristic Curve




/ Package Dimensions




Symbol	Symbol
	
	
	
	
	
	
	
	
	

TOH252

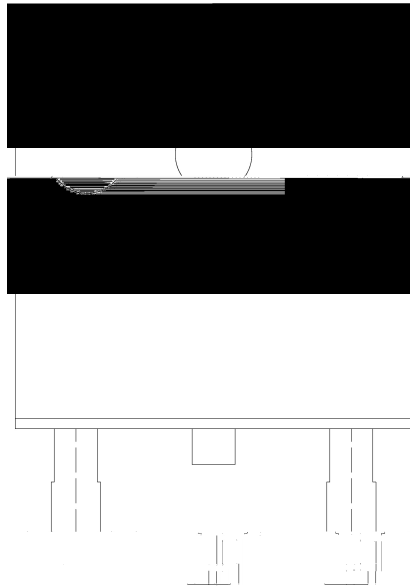/ Marking



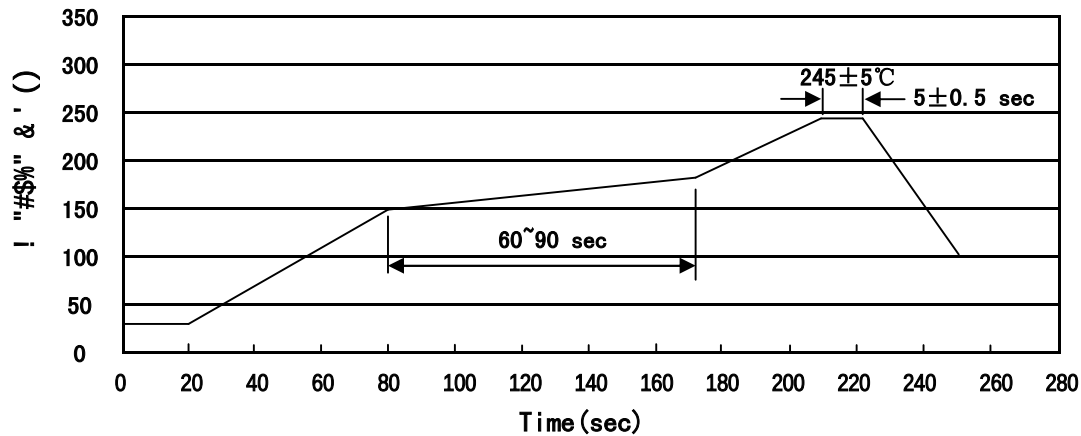() / Temperature Profile for IR Reflow Soldering(Pb-Free)



Note:

- | | | | | | |
|---|-------|-----|-----------|--------|--|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180°C, Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | | 2 | 10°C/sec. | | 3. Cooling Speed: 2~10°C/sec. |

/ Resistance to Soldering Heat Test Conditions

260±5°C 10±1 sec. Temp.:260±5°C Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension			(unit mm ³)
1000	Reel	1000	1000	1000	1000	1000	1000	1000	1000

/ TUBE

Package Type	Units					Dimension			(unit mm ³)
1000	1000	1000	1000	1000	1000	1000	1000	1000	1000