

2SD602(A)

/ Descriptions

SOT-23 NPN


/ Features

2SB710(A)


Â

/ Applications

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking


						μ


V -Ba44ij 1T83.32 393.2603 Tm -0.Tc f

/ Electrical Characteristic Curve

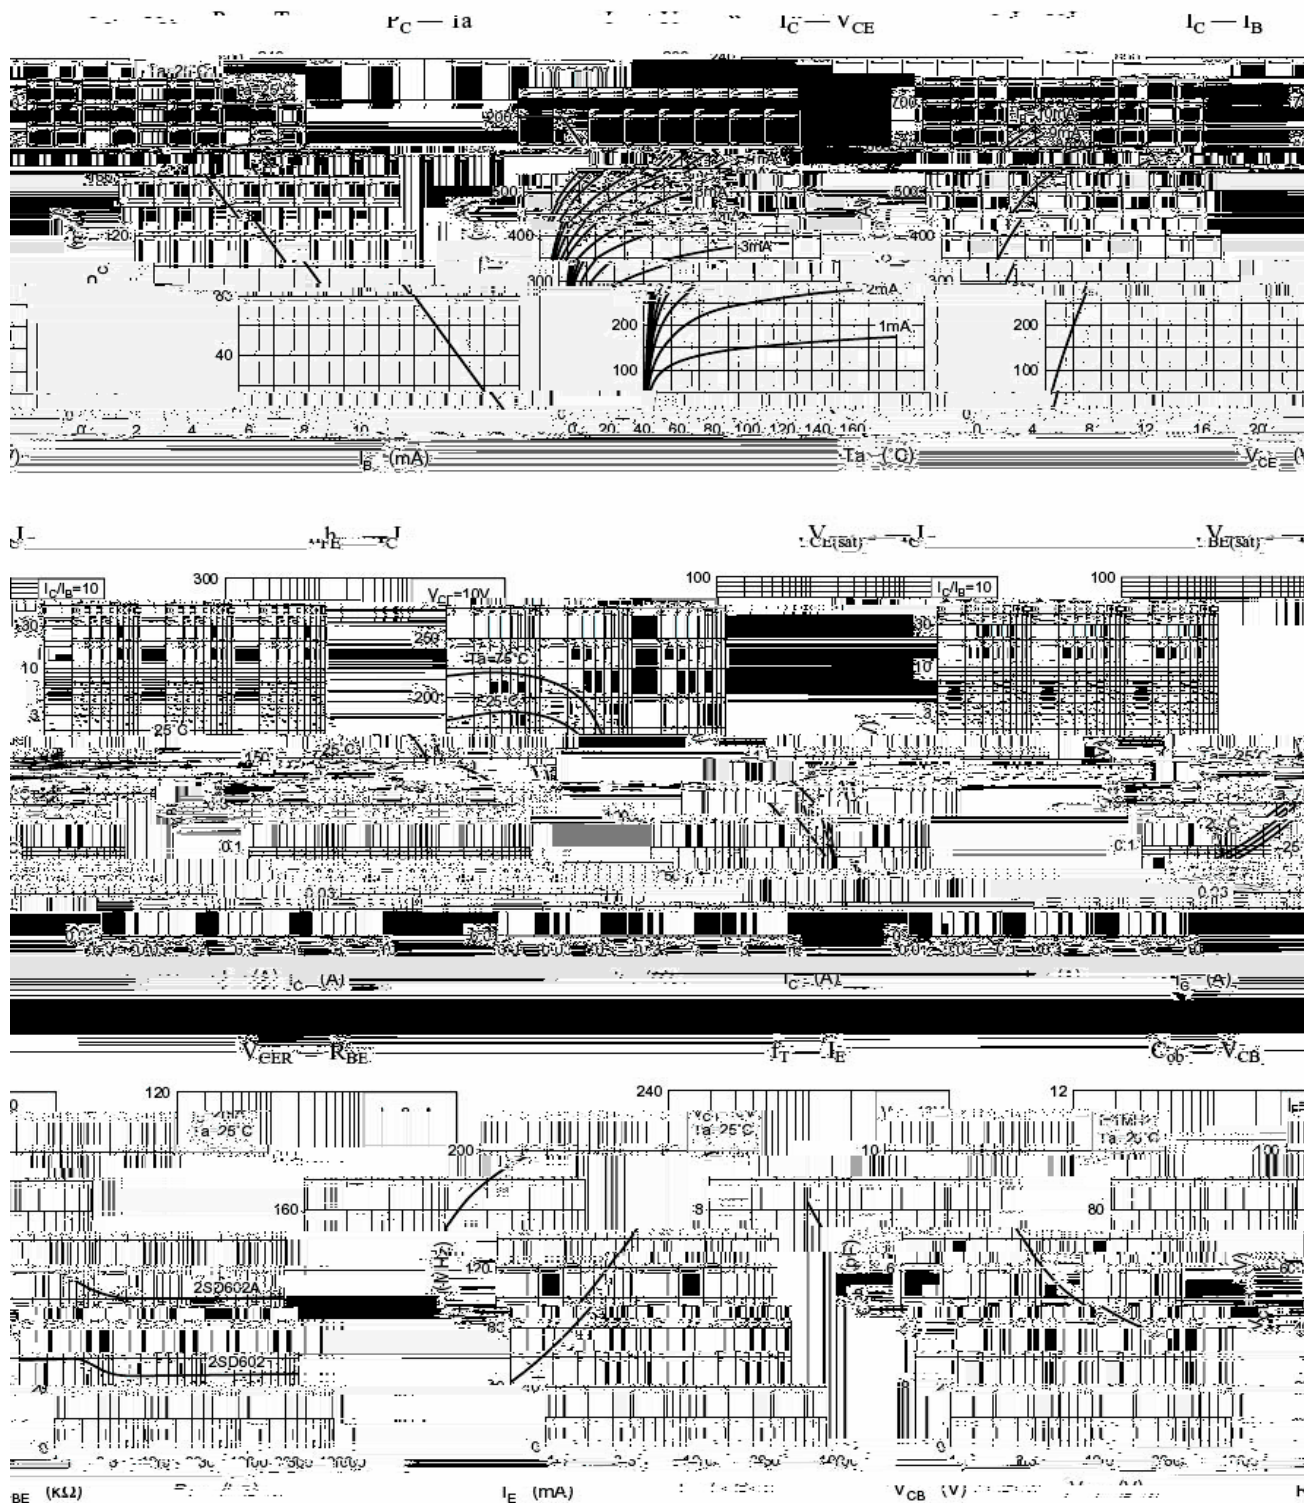


/ Package Dimensions

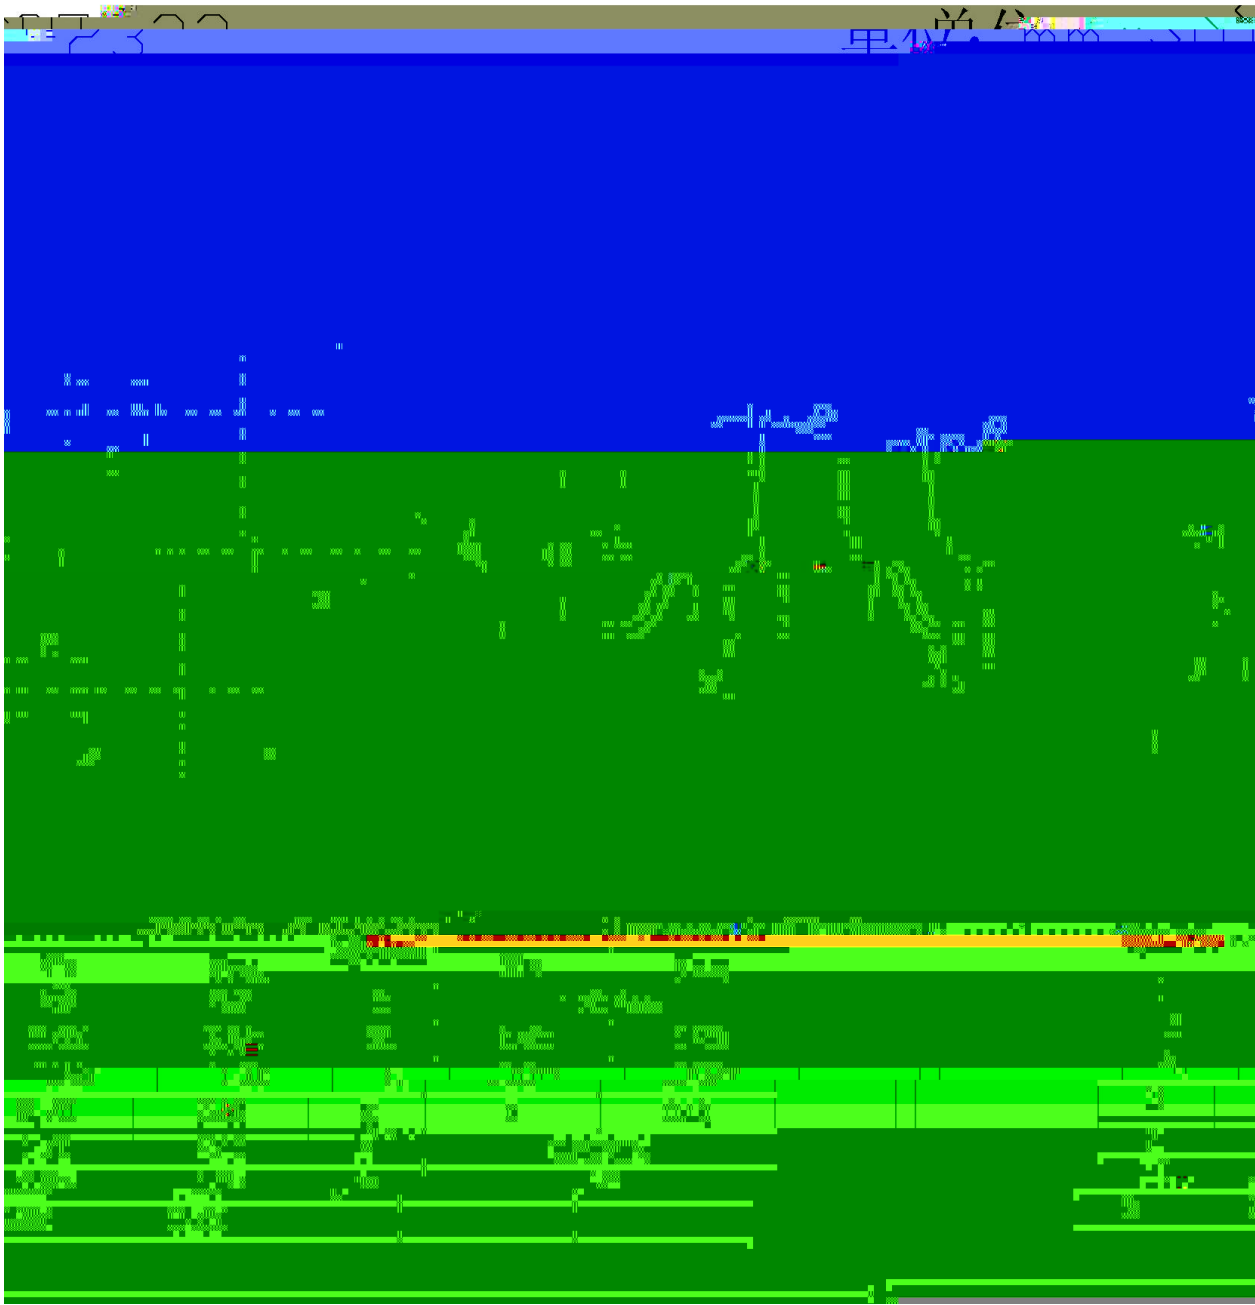

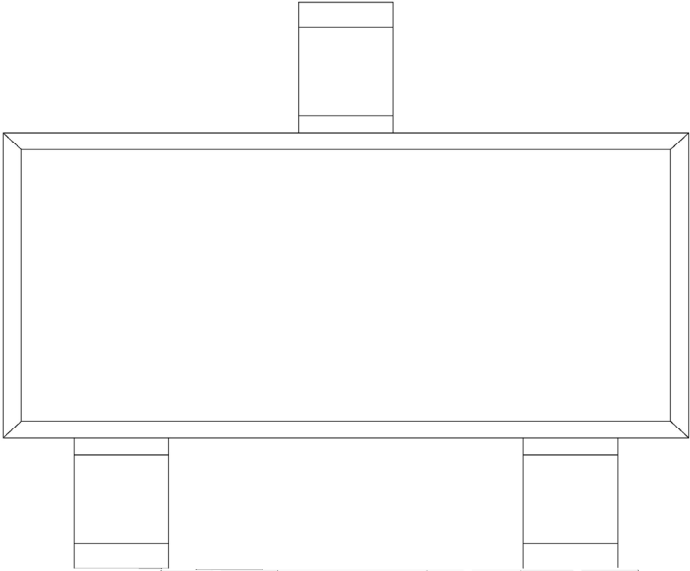

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

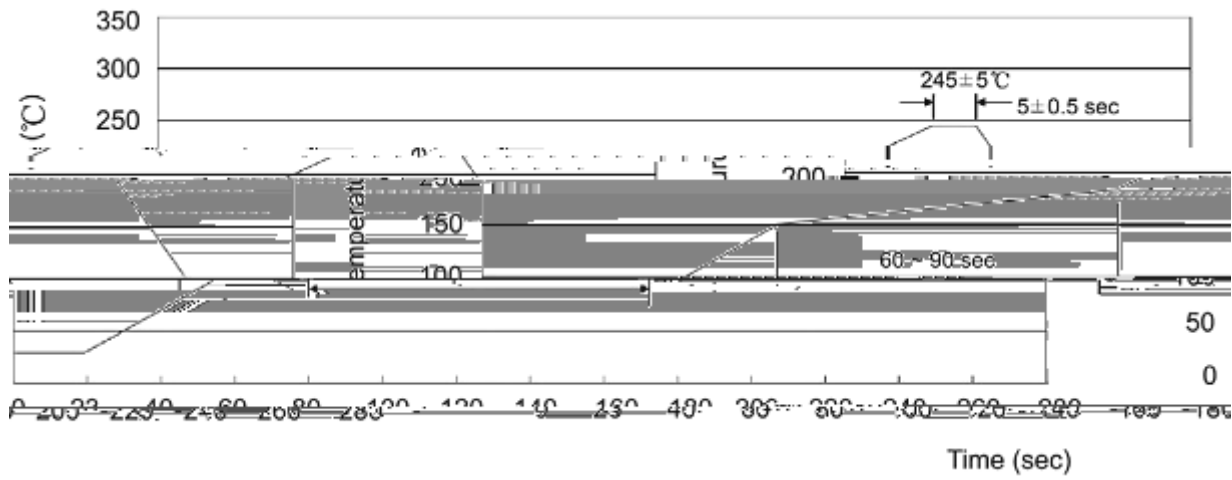

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ρ x8	180×120×180	390×385×205

/ Notices