


3CG5610


/ PackageDimensions

T0-92LM

Unit: mm

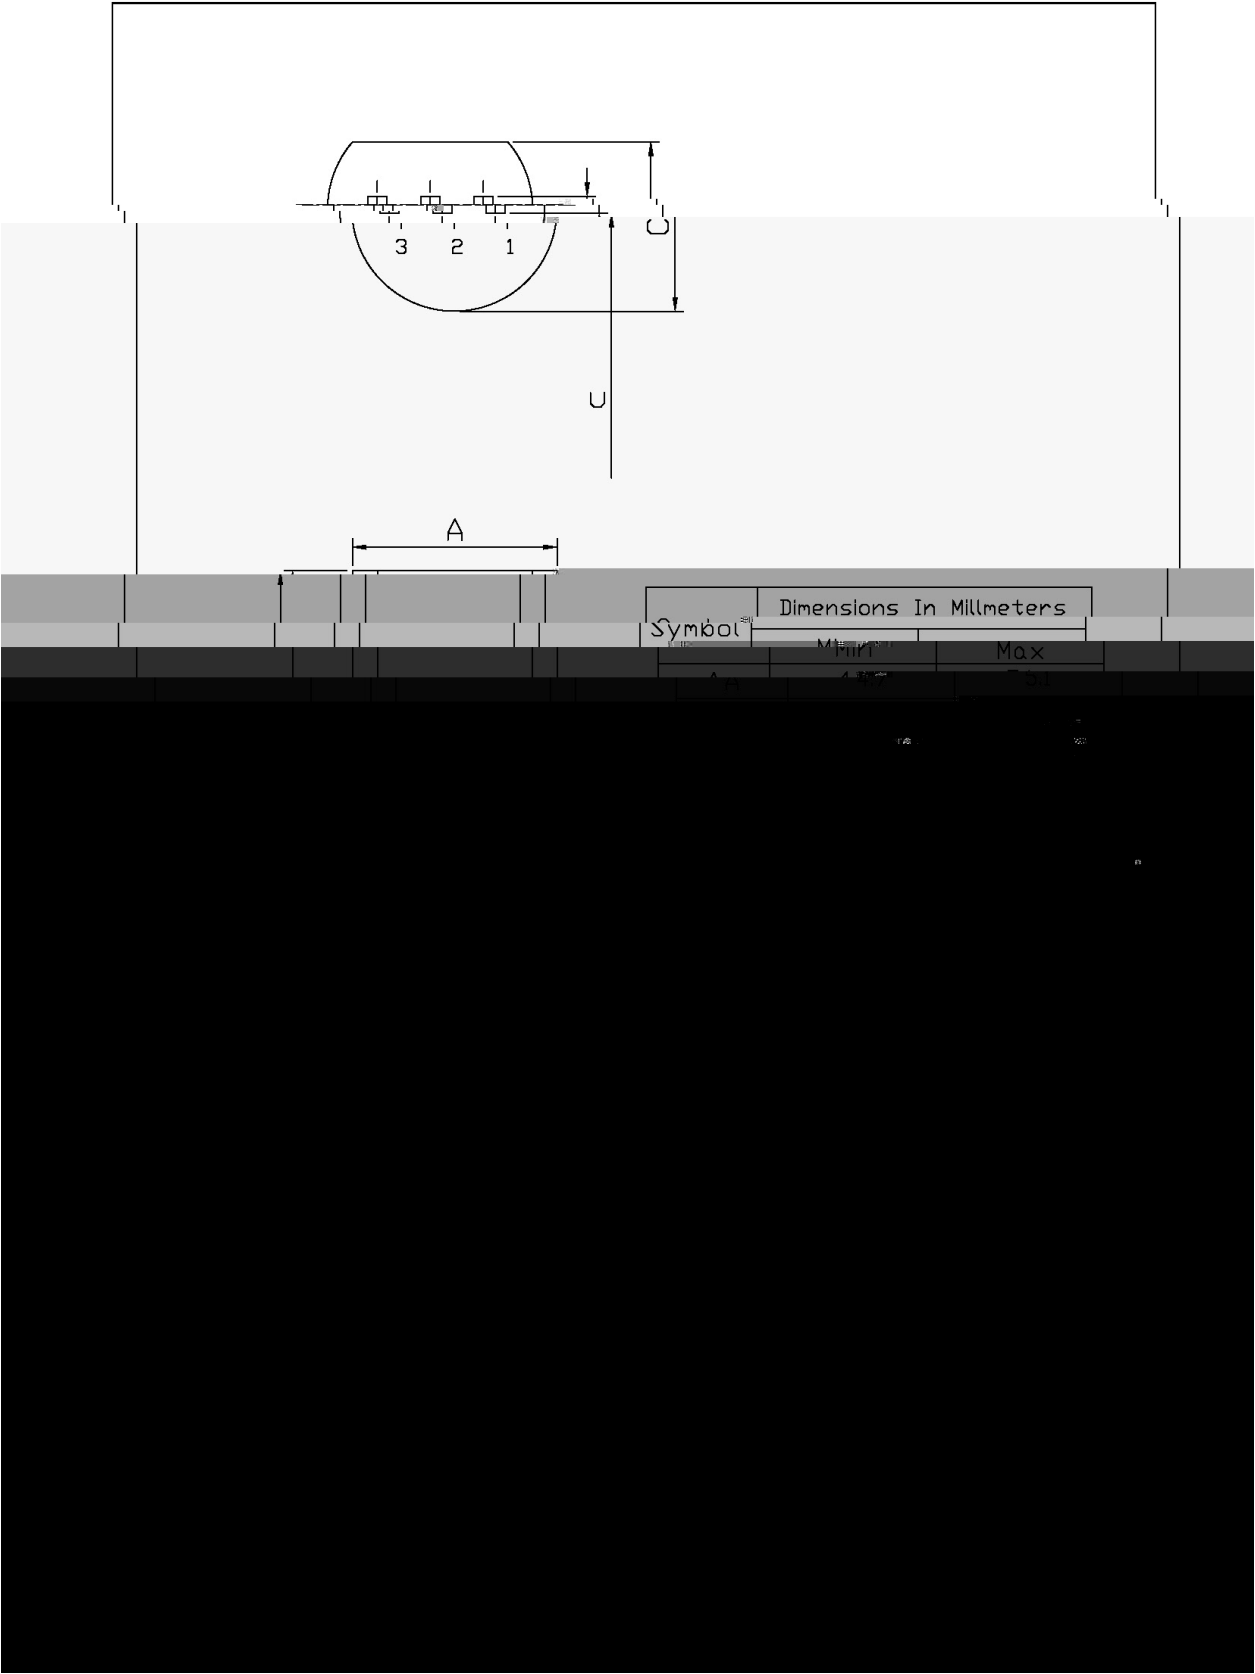


/ Marking Instructions

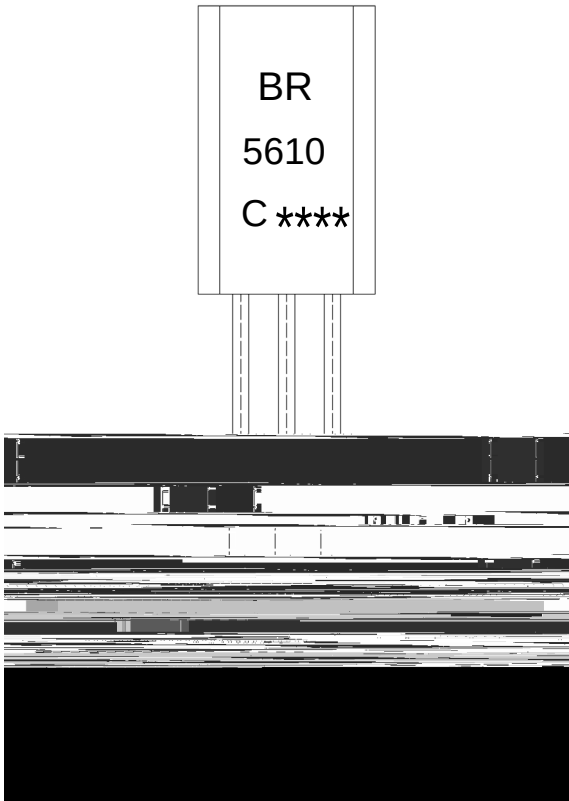

公司代码	公司代码
EU:	EU:
8943	8943
F:	F:
----	----
Note:	Note:
BR:	Company Code.
5610:	Product Type.
C:	h_{FE} Classifications Symbol
****:	Lot No. Code,code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

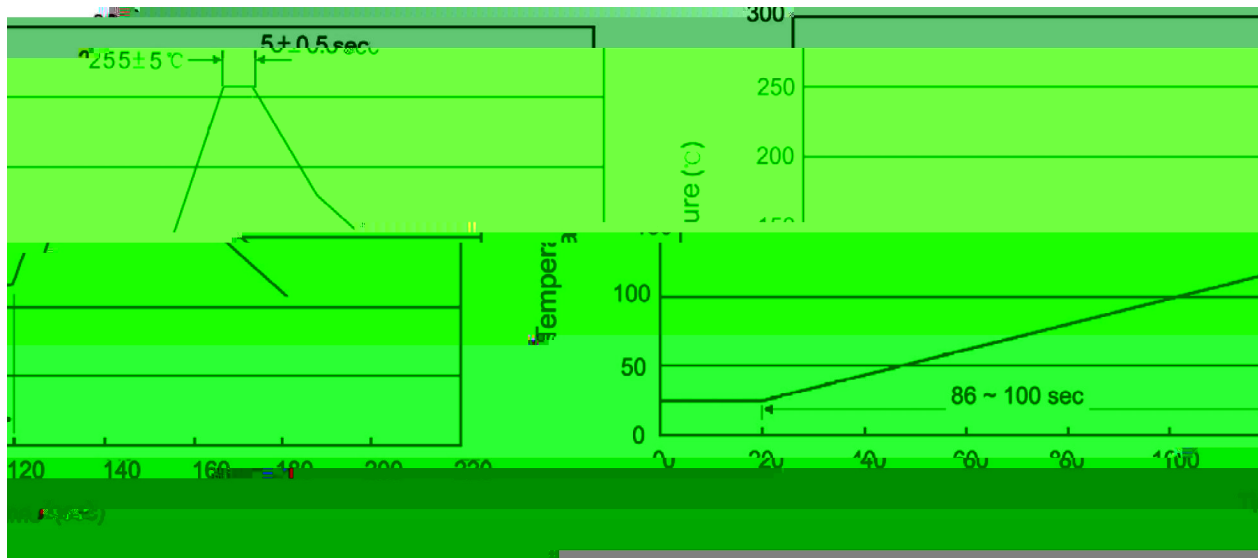

说明

1. 预加热: 25~150℃, 时间: 60~90sec;
2. 峰值温度: 255±5℃, 持续时间: 5±0.5sec;
3. 冷却速度: 2~10℃/sec.

Note:

1. Preheating: 25~150℃, Time: 60~90sec.
2. Peak Temp.: 255±5℃, Duration: 5±0.5sec.
3. Cooling Speed: 2~10℃/sec.

/ Resistance to Soldering Heat Test Conditions

温度: 270±5℃ 时间: 10±1 sec. Temp.: 270±5 Time: 10±1 sec

/ Packaging SPEC.

散装 / BULK

Package Type	Units					Dimension (unit mm3)		
	Units/Bag	Bags/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Bag	Inner Box	Outer Box
TO-92LM	1,000	8	8,000	5	40,000	135×190	237×172×102	560×245×195

Ammo / AMMO

Package Type	Units					Dimension (unit mm3)	
	Units/tape	Tape/Inner Box	Rows/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Inner Box	Outer Box
TO-92LM	2,500	1	100	10	25,000	328×230×42	480×346×235 547×407×268 2,500-92LM