

78D12

Rev.J Jun.-2024



蓝箭电子
BLUE ROCKET ELECTRONICS







DATA SHEET

TO-252


217 R666

Parameter	Symbol	Rating	Unit
-----------	--------	--------	------

Electrical Characteristic Curve

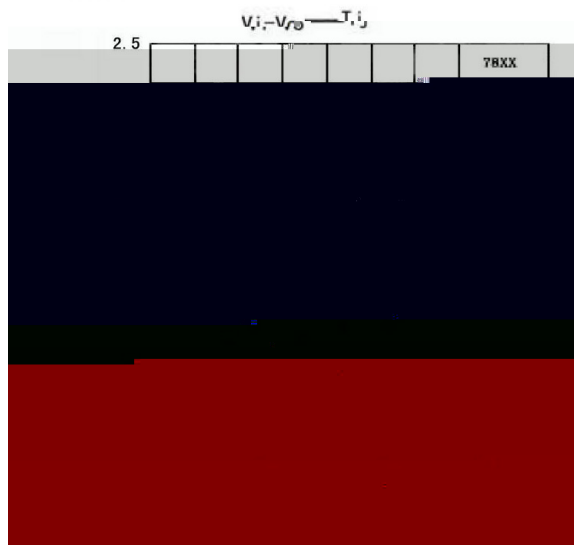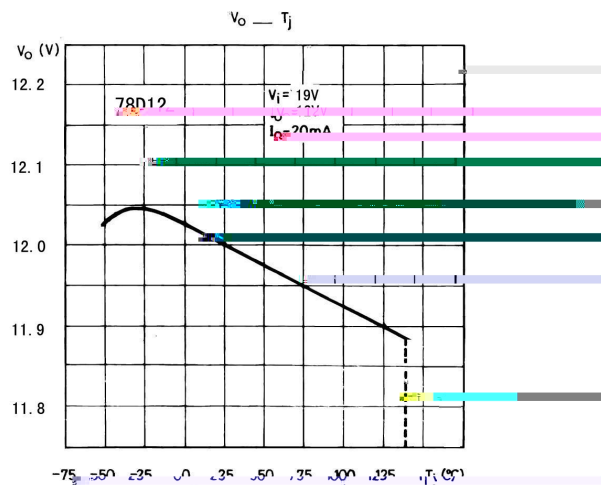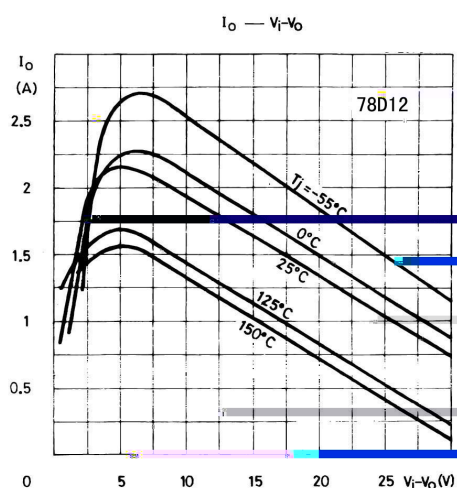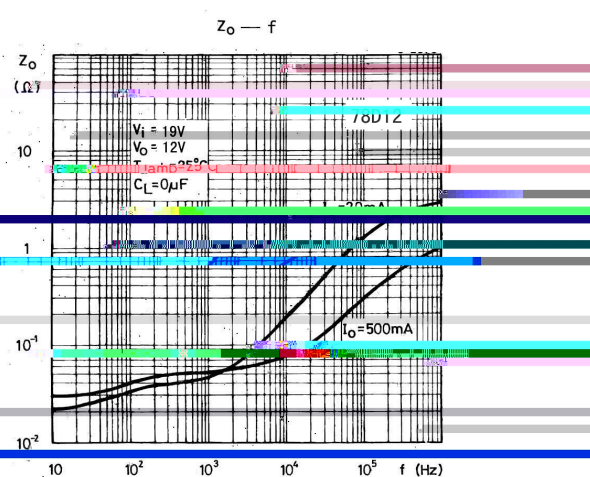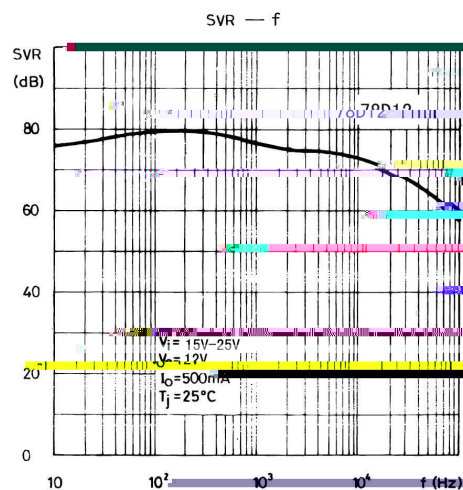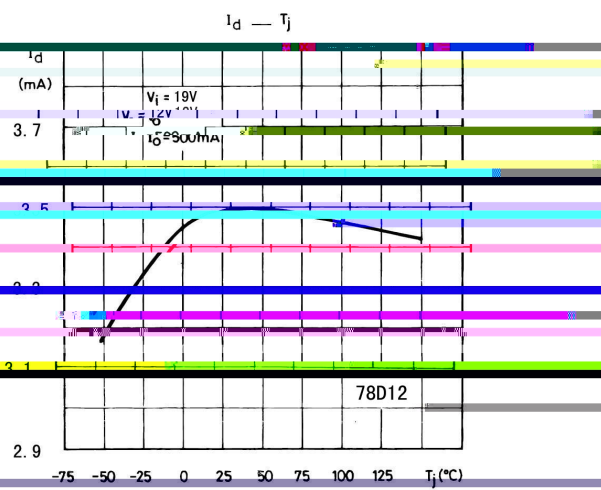

u È Ö L f / Package Dimensions

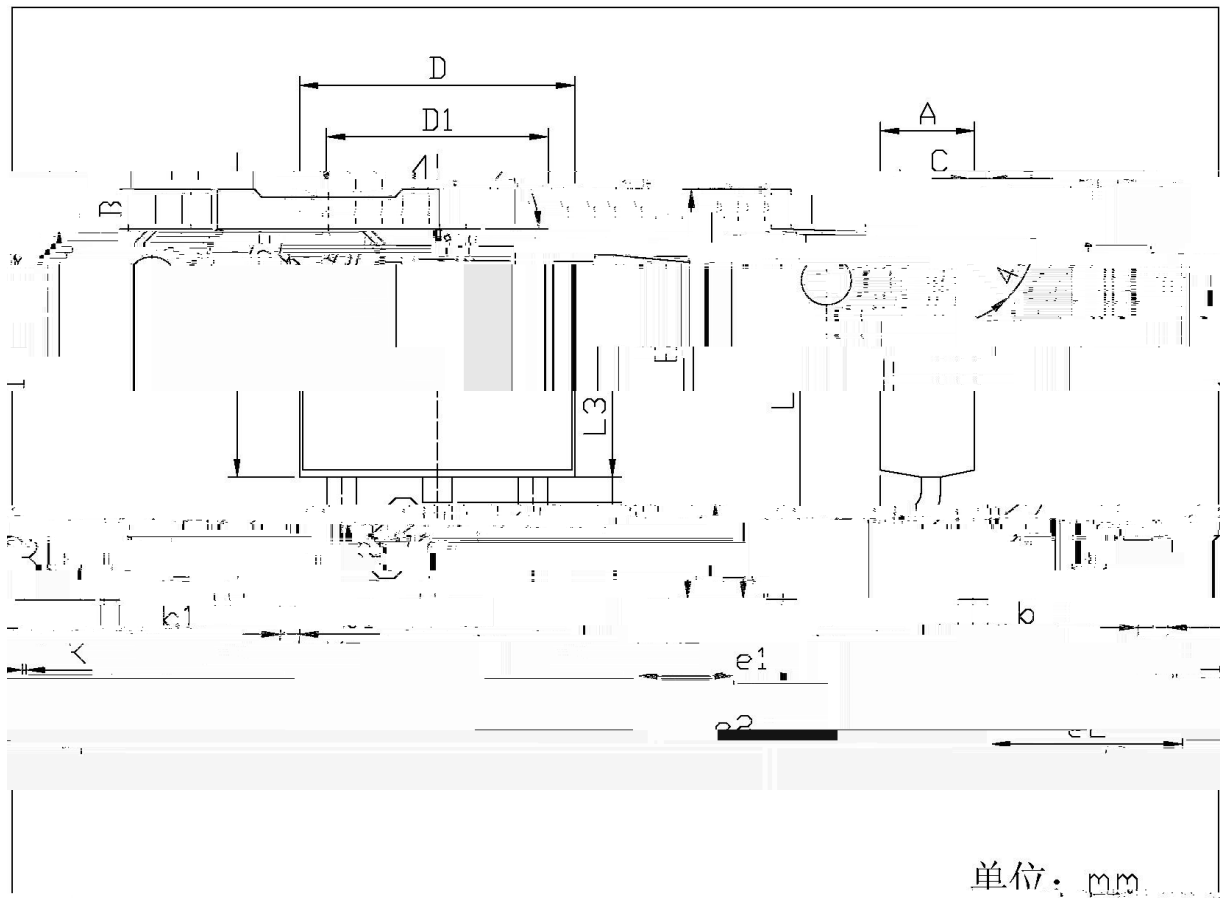[illegible]

T0-252

78D12

测试条件 / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

- Note:
- 1

150 180

60 90sec;

2

245 5

5 0.5sec;
- 3
- 2 10 /sec.

1.Preheating:150~180 , Time:60~90sec.

2.Peak Temp.:245 5 , Duration:5 0.5sec.

3. Cooling Speed: 2~10 /sec.

测试条件 / Resistance to Soldering Heat Test Conditions

260 5

10 1 sec.

Temp.:260±5

Time:10±1 sec

包装规格 / Packaging SPEC.

/ REEL