

Rev.H Mar.-2023



VRW056 M M E SQS æ M ç s ll 1 Silicon PNP transistor in a SOT-23 Plastic Package.

лб ; 383 P J l ñ f β

Complementary pair with 8050MG, HF Product.

ᄁᄁᄁ l ' ᄁᄁᄁᄁᄁ

Power amplifier applications.

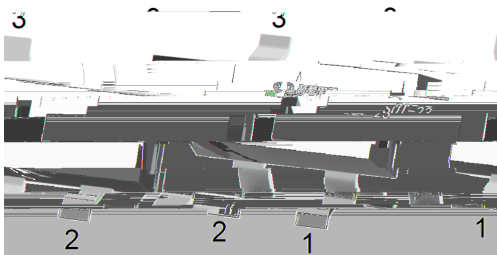

PIN1 χ Base

PIN 2 χ Emitter

PIN 3 χ Collector

h _{FE} Classifications Symbol	B	C	D
h _{FE} Range	85 160	120 200	160 300
Marking	GY2B	GY2C	GY2D

Rev.H Mar.-2023

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}		

Rev.H Mar.-2023





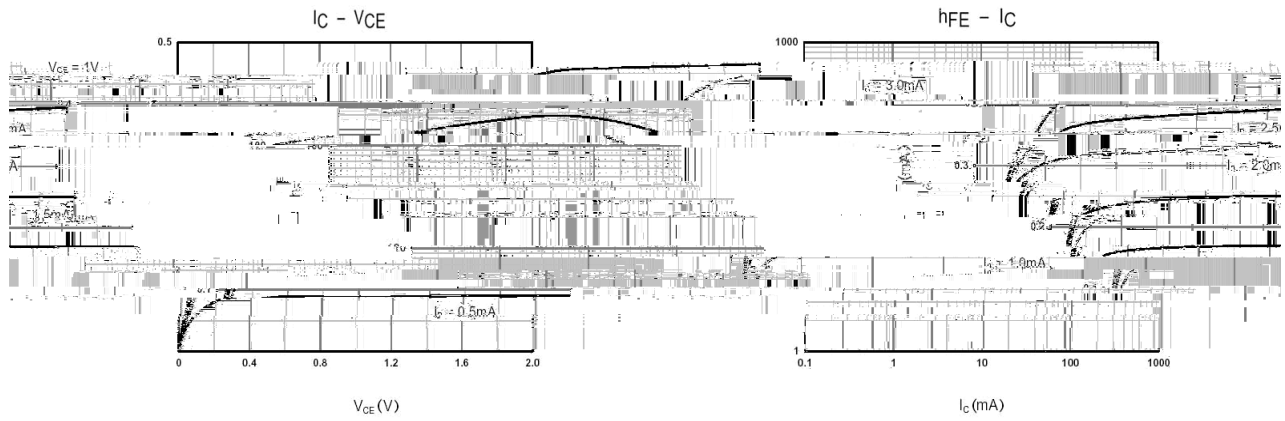


图 1-23

单位: mm

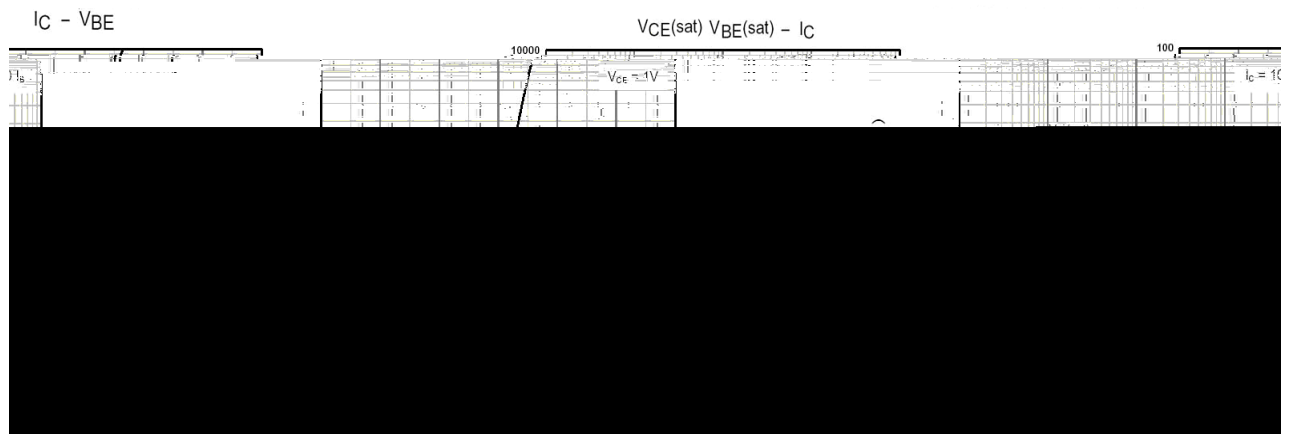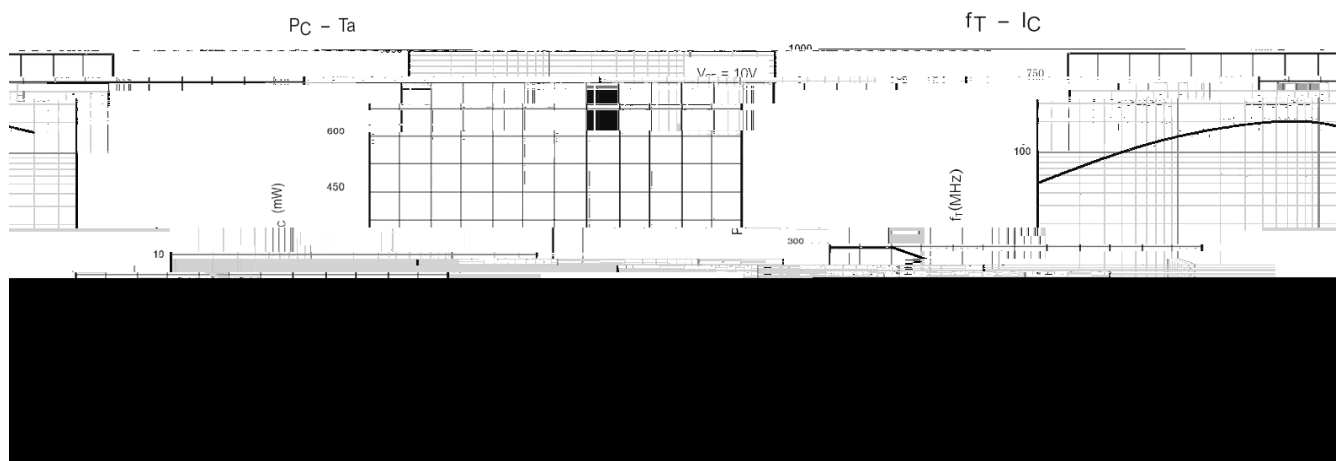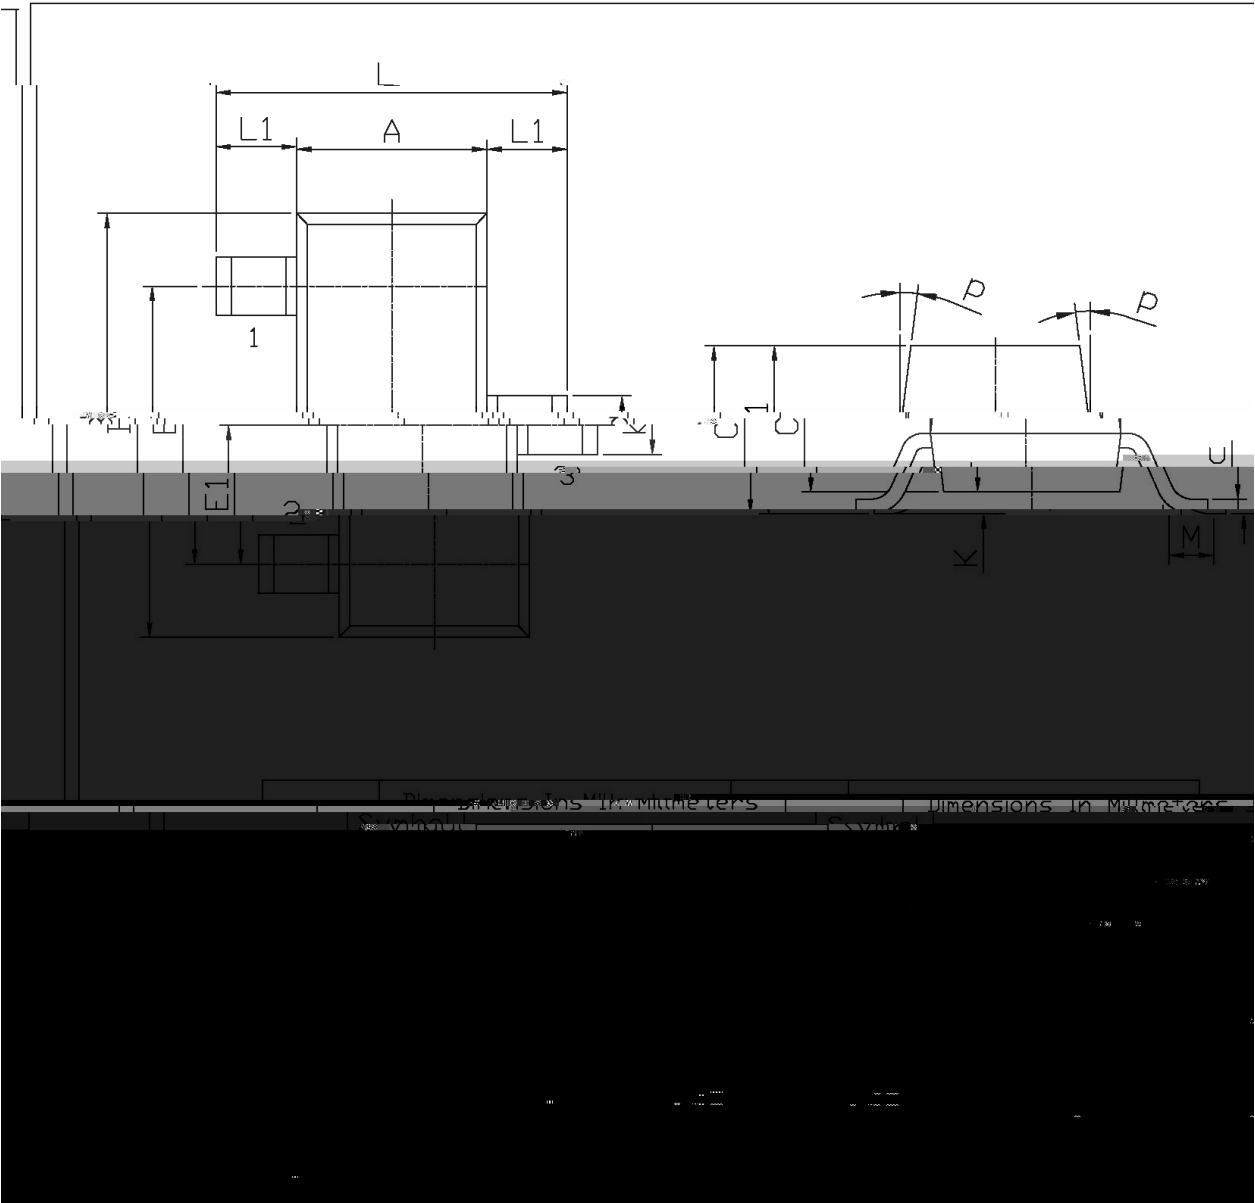

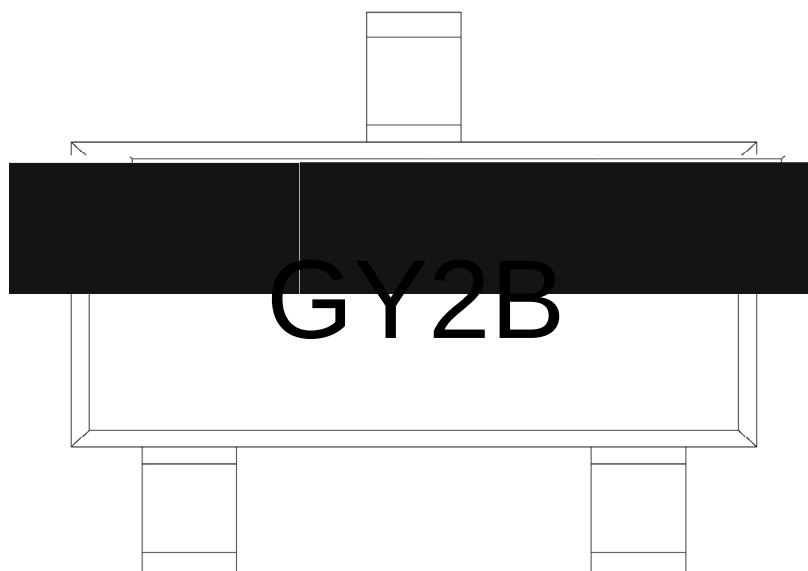

符号

J 字符 表示产品代码

\5 字符 表示产品类型代码

E 字符 表示 h_{FE} 分类符号代码

Note:

J 字符 Halogen Free Product Code

\5 字符 Product Type Code

E 字符 h_{FE} Classifications Symbol Code

Temperature Profile for IR Reflow Soldering(Pb-Free)

1. 预加热 150℃~180℃ 10~30s; 2. 回流 235℃~245℃ 60~90sec;

Note:
1.Preheating:150~180℃