v ‴Ω Parameter	ϒ N Symbol	‴Ω Ö Rating	D Ч Unit
Collector to Base Voltage	V_{CBO}	50	V
Collector to Emitter Voltage	V_{CEO}	30	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	30	mA
Base Current - Continuous	I_B	10	mA

/ Package Dimensions

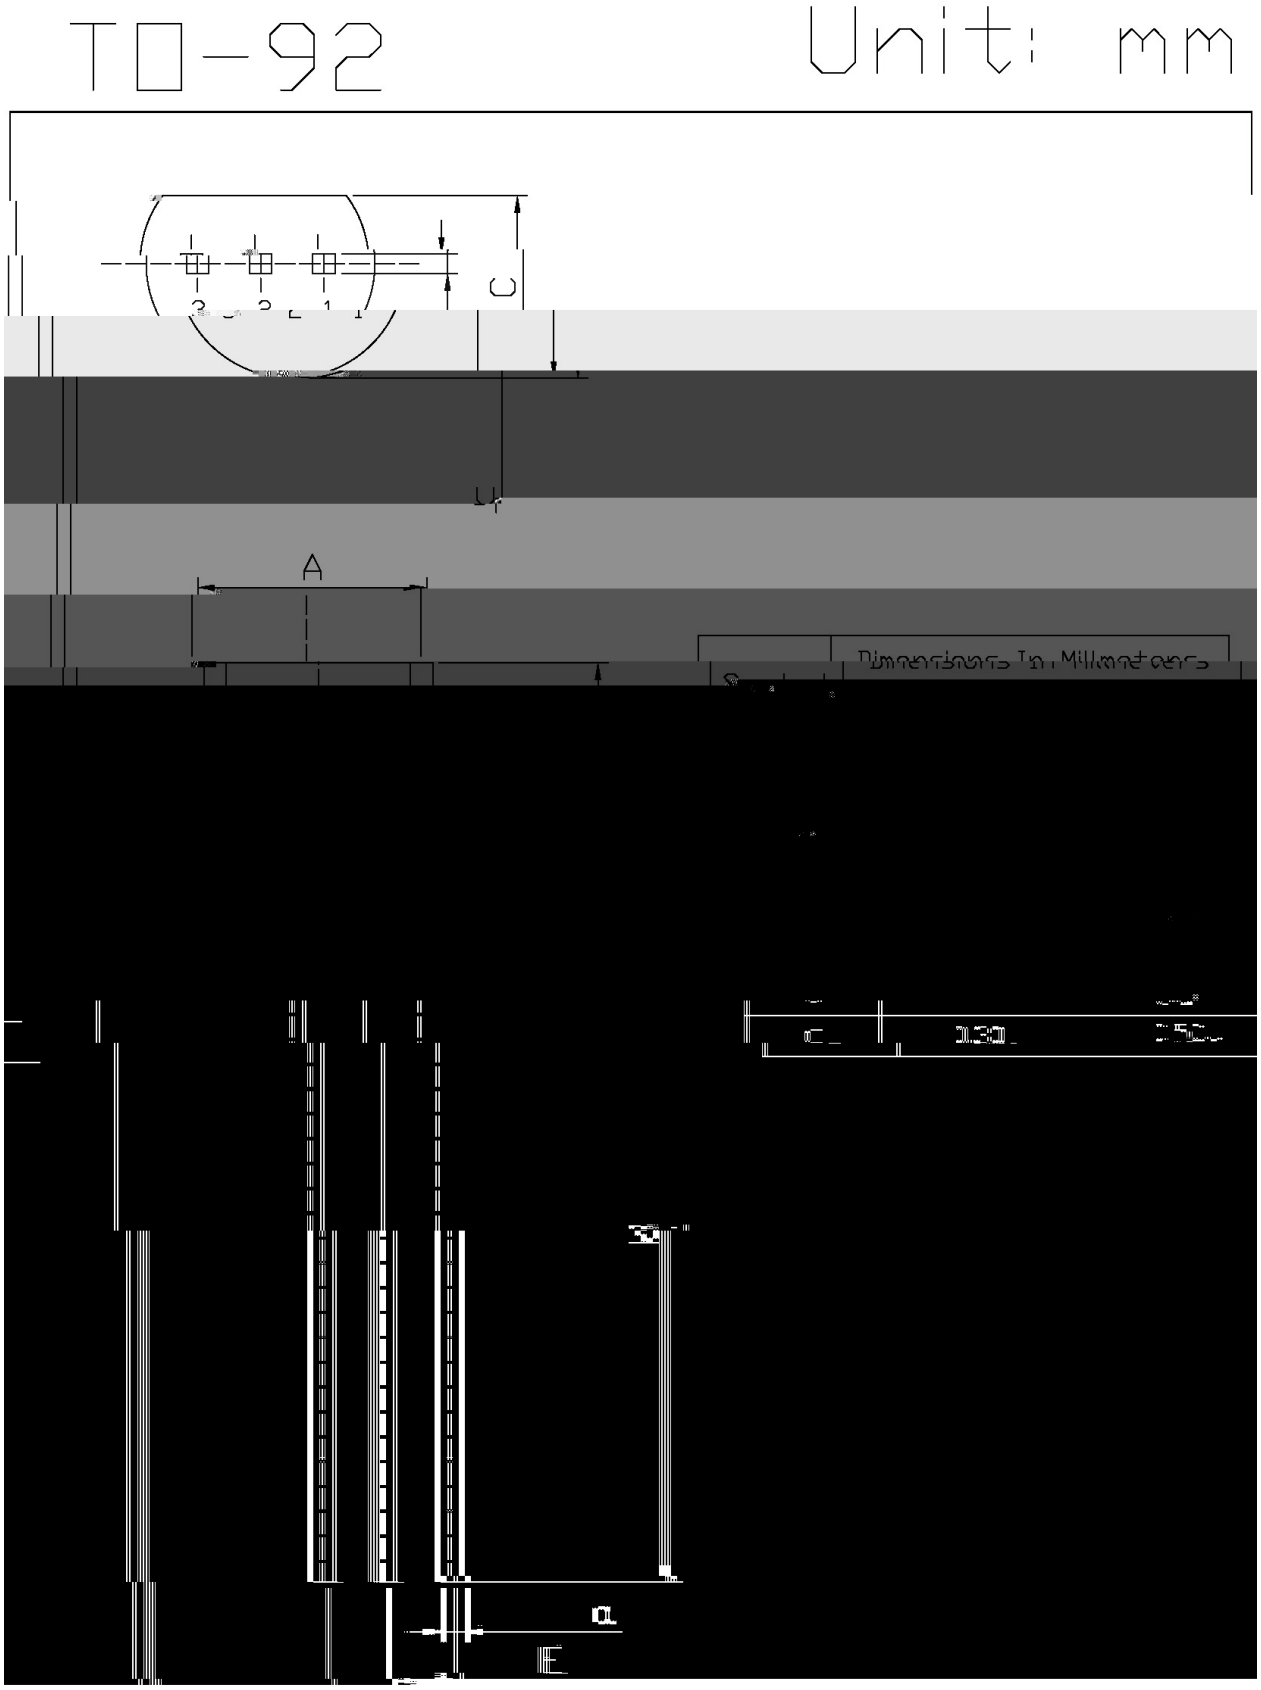

/ Marking Instructions

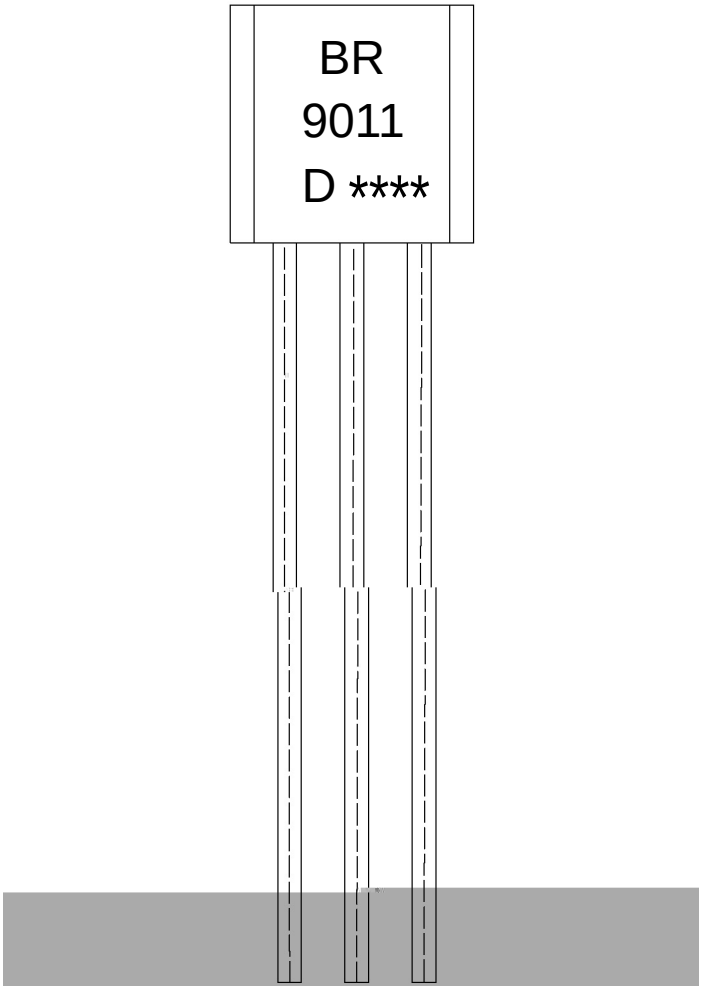

ب ˝ χ

EU χ ѭ ϗ И Ґϧ

<344 χ ѭ ϳ N Ґϧ

G= ѭ k IH ‘ 6 Ґϧ

---- χ ѭ ı ғ ӈ̈ N Ґϧ ı ϕ ı ғ ӈ̈ N Ψ ϼ

Note:

BR: Company Code.

9011: Product Type.

D: h_{FE} Classifications Symbol.

****: Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

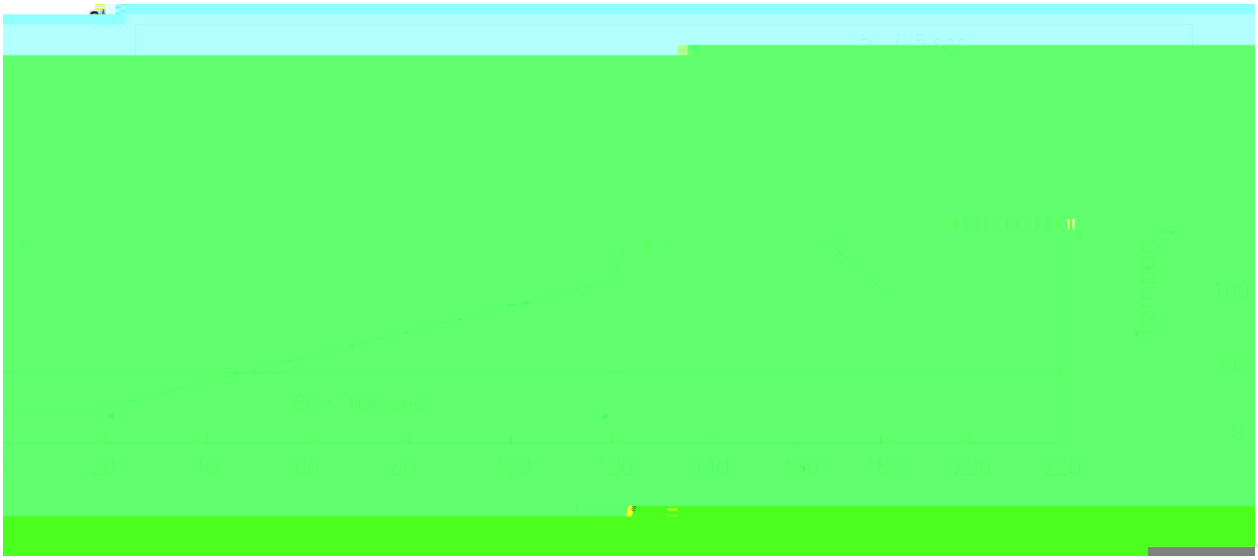

ب ˝ χ

1 Ĺ ♬ □ ỷ 25 Ḱ 150 ł ı `H ڑ 60 Ḱ 90sec;

2 Š Ө □ ỷ 255 ° 5 ł ı `H ڑ `Y ﾊ ㎞ 5 ° 0.5sec;

3 ì ˙ ｲ ˛ ɔ ଌ ỷ ㎞ 2 Ḱ 10 ł /sec.

Note:

1.Preheating:25~150 ł , Time:60~90sec.

2.Peak Temp.:255 ° 5 ł , Duration:5 ° 0.5sec.

3. Cooling Speed: 2~10 ł /sec.

/ Resistance to Soldering Heat Test Conditions

□ ỷ χ 270 ° 5 ł `H ڑ χ 10 ° 1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

ˈQ ţ ｙ Ł / BULK

Package Type	Units					Dimension		(unit mm3)
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

ﾊ Ⅴ ｙ Ł / AMMO

Package Type	Units					Dimension	(unit mm3)
	Units/tape /	Tape/Inner Box /	Rows/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Inner Box	Outer Box
TO-92	3,000	1	120	10	30,000	328×230×42	480×346×235 547×407×268

/ Notices