

/ Descriptions


Silicon NPN transistor in a SOT-23 Plastic Package.

/ Features

Low current, high voltage.

/ Applications

Telephony and professional communication equipment.

/ Equivalent Circuit



PIN1 Base PIN 2 Emitter PIN 3 Collector

/ h_{FE} Classifications & Marking


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	250	V
Collector to Emitter Voltage	V_{CEO}	250	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	50	mA
Peak Collector Current- Continuous	I_{CM}	100	mA
Base Current	I_B	50	mA
Collector Power Dissipation	P_C	250	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cut-Off Current	I_{CBO}	$V_{CB}=200V$ $I_E=0$ $T_j=150$			10	A
Collector Cut-Off Current	I_{CBO}	$V_{CB}=200V$ $I_E=0$			0.01	A
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=5.0V$ $I_C=0$			0.01	A


/ Electrical Characteristic Curve

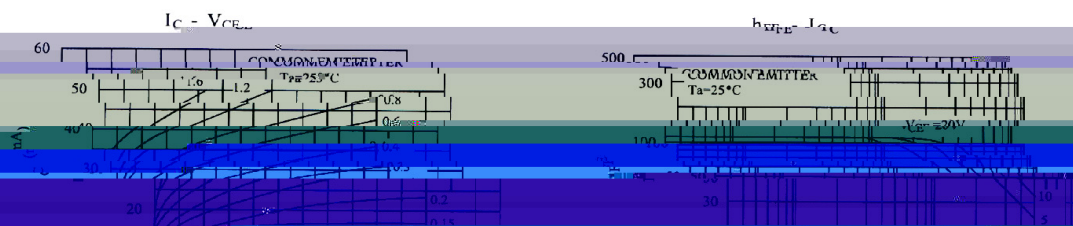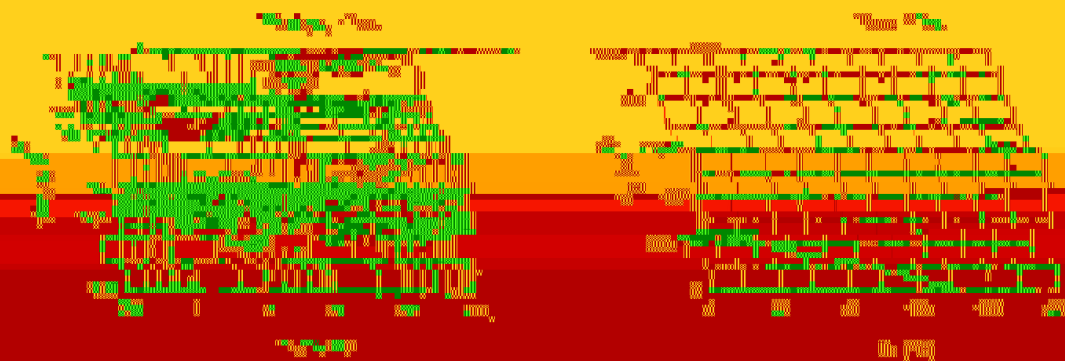

/ Package Dimensions

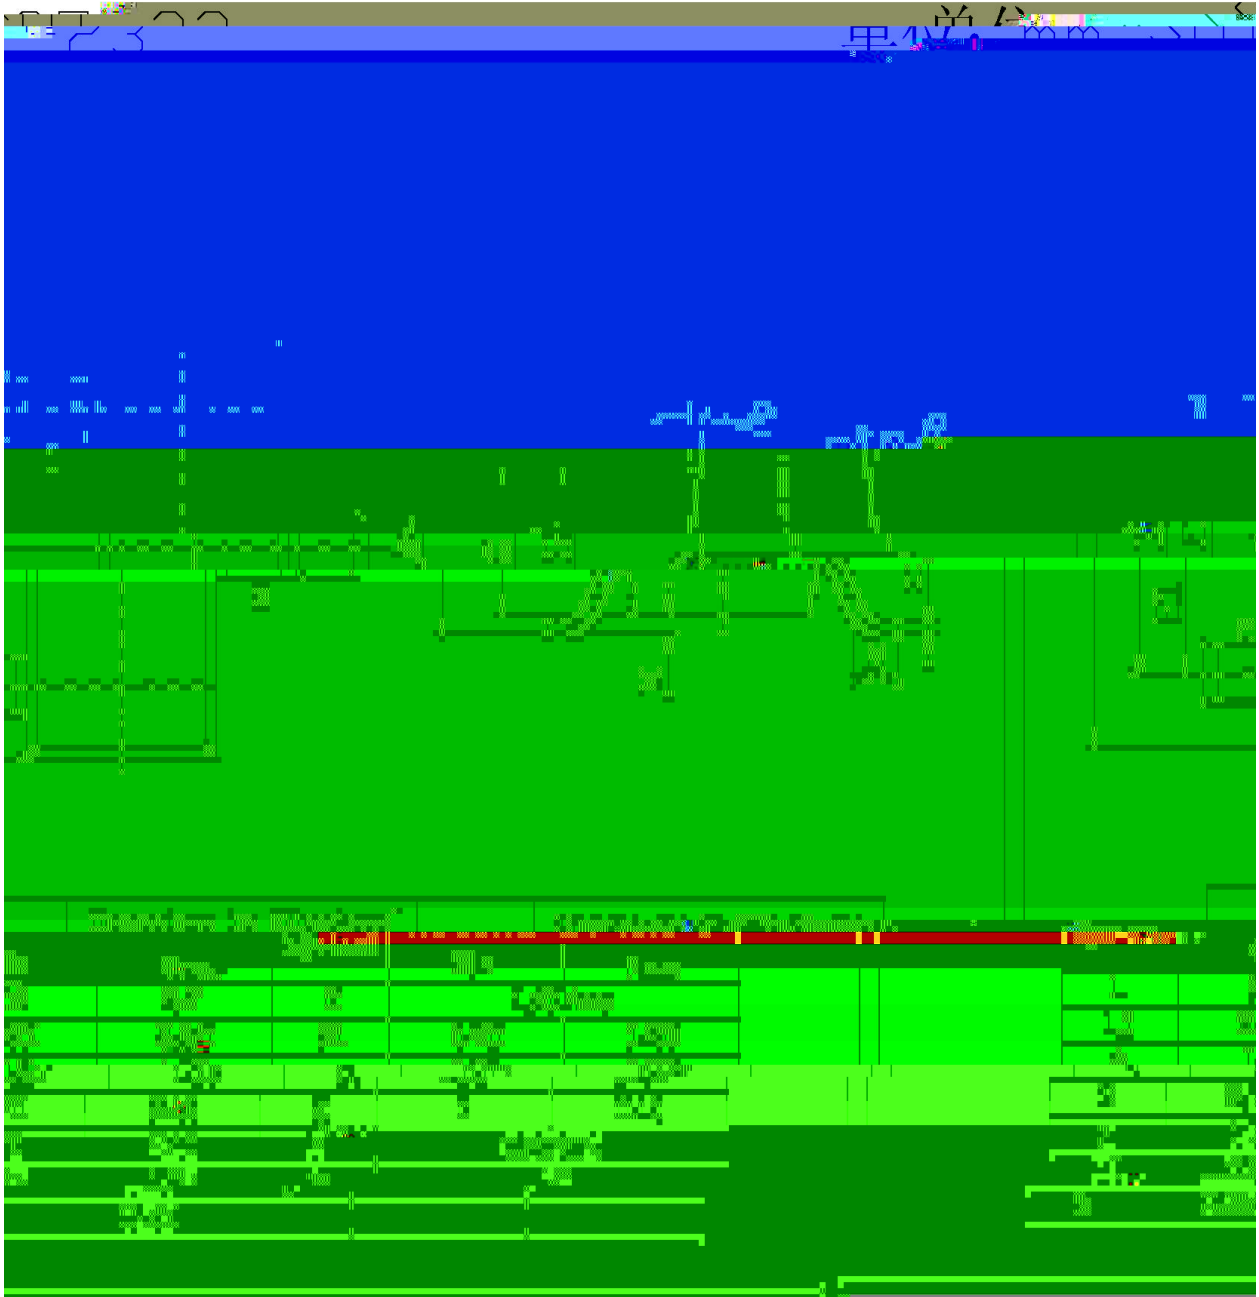

/ Marking Instructions

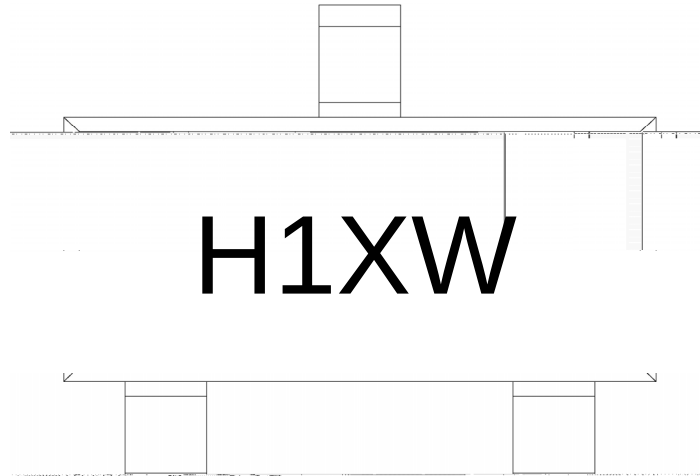


Note:

H: Company Code.

1XW: Product Type Code.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

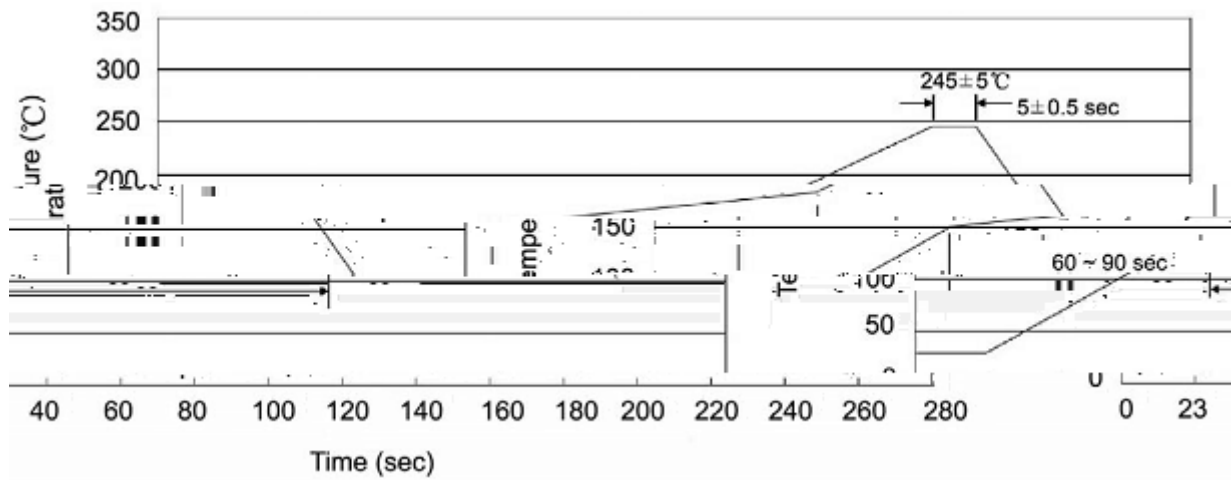

Note:

- 1

25 150

60 90sec;

1.Preheating:25~150 , Time:60~90sec.
- 2

245 5

5 0.5sec;

2.Peak Temp.:245 5 , Duration:5 0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260 5 10 1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices