


TO-220 MOSFET N-CHANNEL MOSFET in a TO-220 Plastic Package.

Low gate charge, low crss, fast switching.

These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.




PIN 1 G


PIN 2 D

PIN 3 S


See Marking Instructions.

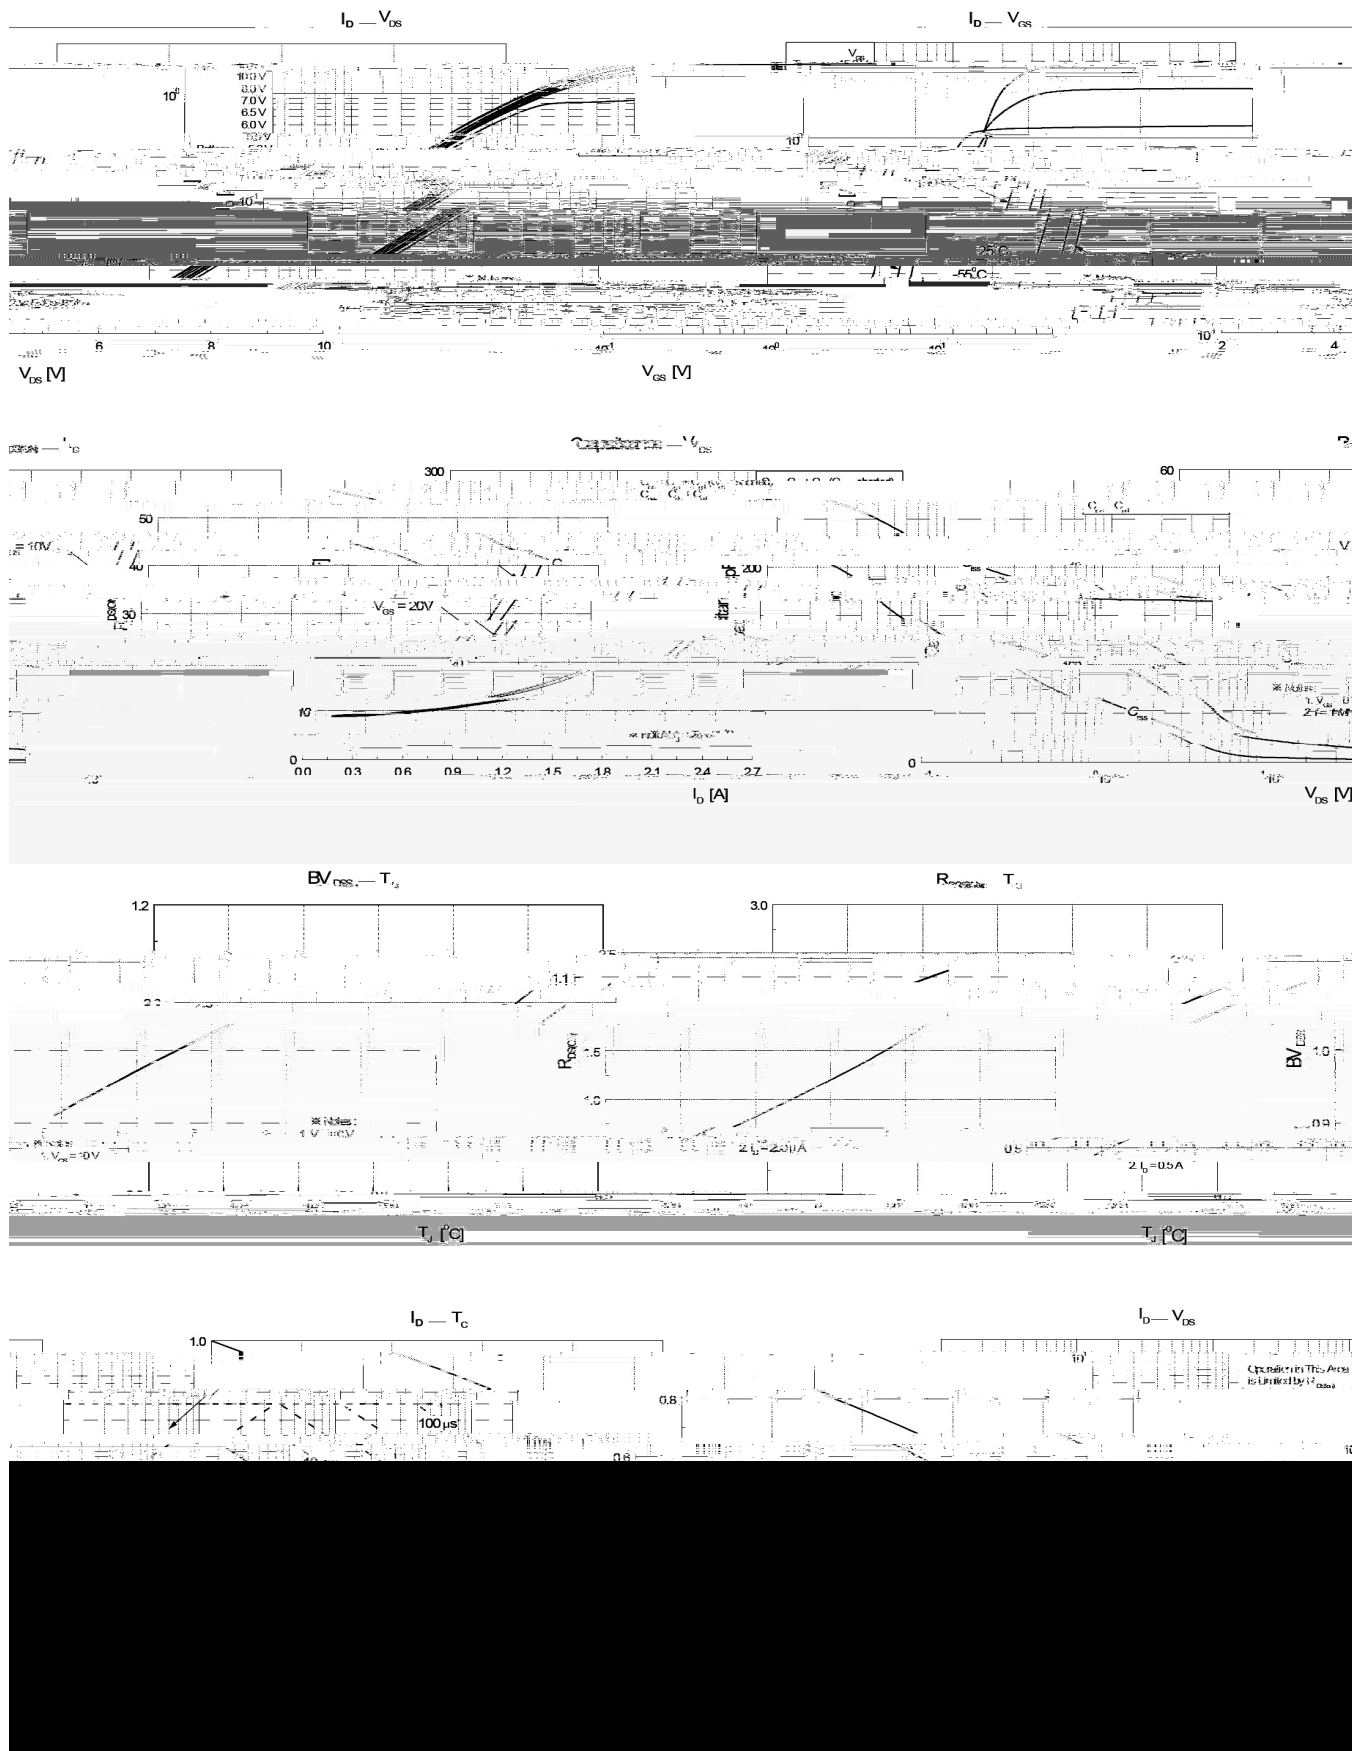



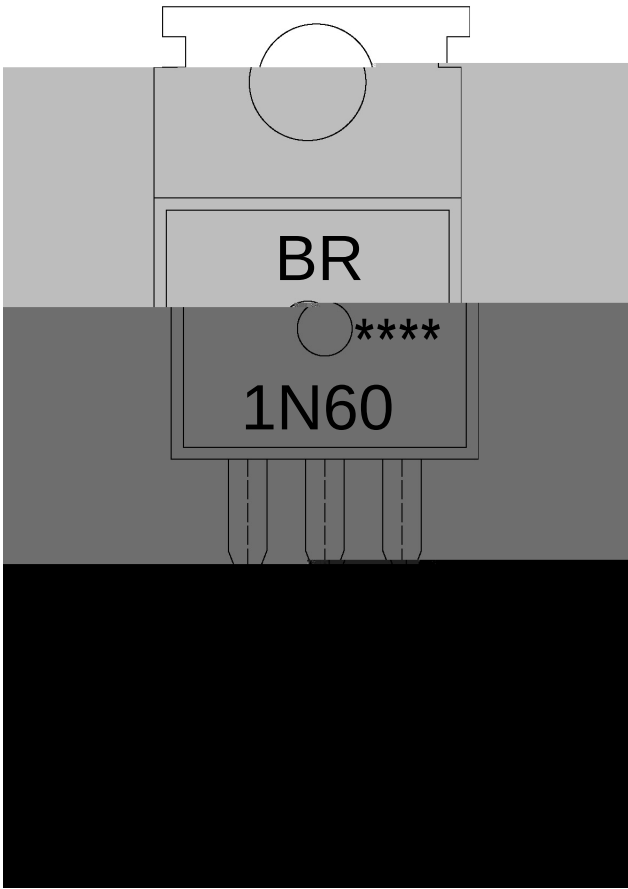

BR	Company Code
1N60	Product Type.
----	Lot No. Code, code change with Lot No.
Note:	
BR:	
1N60:	
****:	

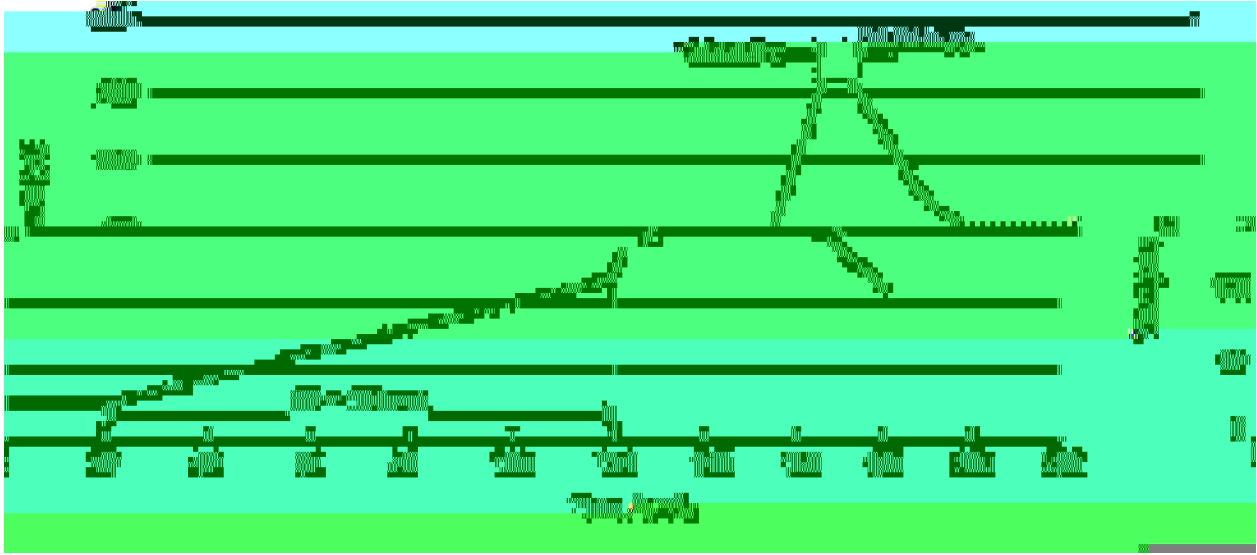

℃

1. 预加热: 25~150℃, 时间: 60~90sec;
2. 升温: 255±5℃, 时间: 5~0.5sec;
3. 冷却: 2~10℃/sec.

Note:

1. Preheating: 25~150℃, Time: 60~90sec.
2. Peak Temp.: 255±5℃, Duration: 5~0.5sec.
3. Cooling Speed: 2~10℃/sec.

℃

时间: 10±1 sec.

Temp.: 270±5