

Rev.H Oct.-2023

SOT-23 1 N 沟道 MOS 管
N-CHANNEL MOSFET in a SOT-23 Plastic Package.

46(38 08)re f52.94 799tc [< Tm -.0005 Tc [(SOT)55.67(a 6)]-5.4(02K2)]523 0 48a406aa>

Parameter	Symbol	Rating	Unit
-----------	--------	--------	------

Parameter	γ Symbol
-----------	--------------------

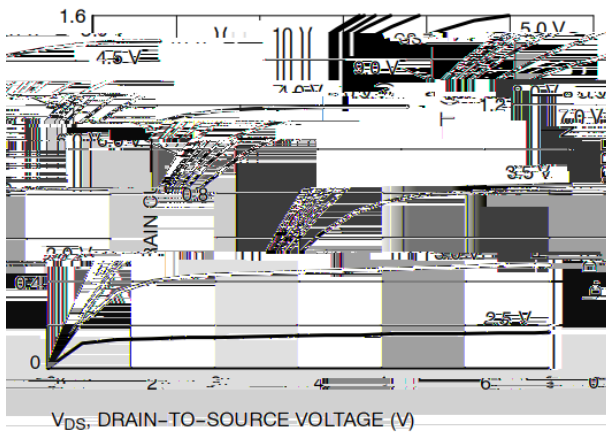


Figure 1 Drain Current vs. Drain-to-Source Voltage

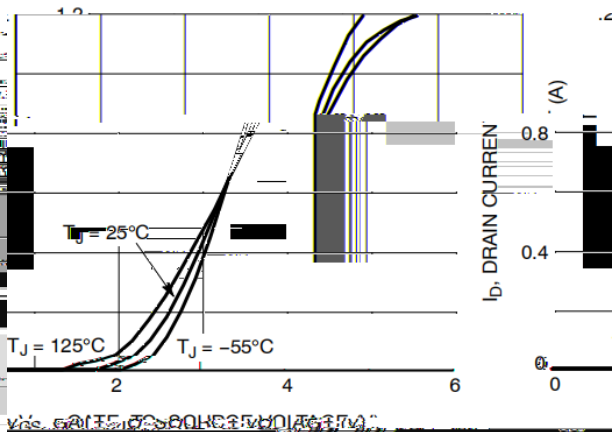


Figure 2 Transfer Characteristics

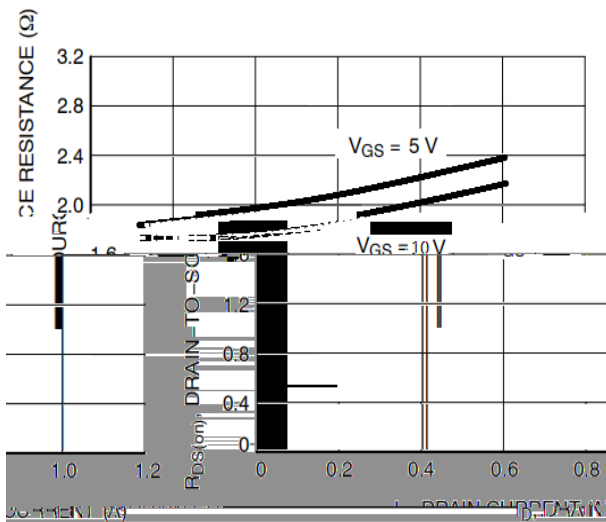


Figure 3 On-Resistance vs. Drain Current and

Figure 3 On-Resistance vs. Drain Current and

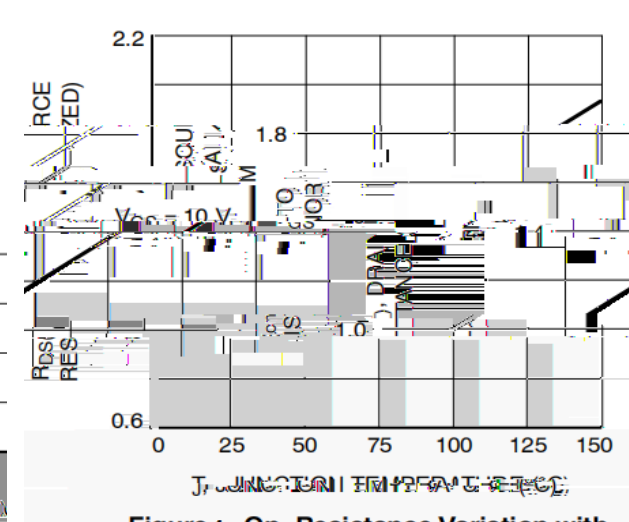


Figure 4 On-Resistance vs. Temperature

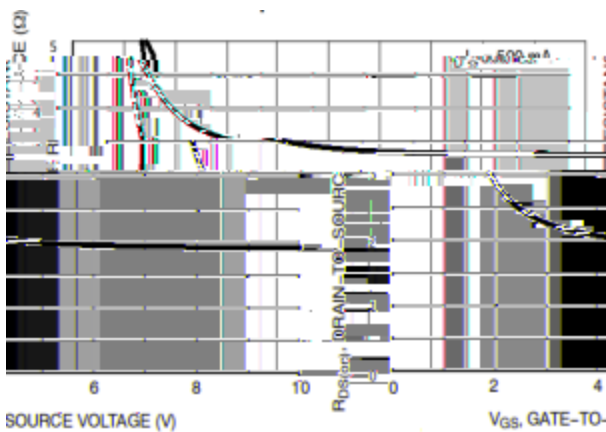


Figure 5 On-Resistance vs. Gate-to-Source

Figure 5 On-Resistance vs. Gate-to-Source Voltage


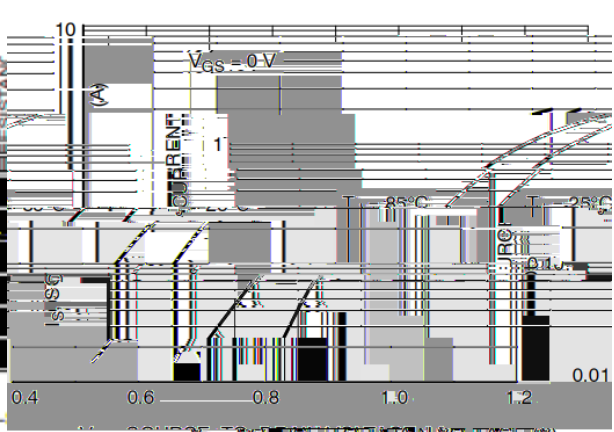


Figure 6 Diode Forward Voltage vs. Current

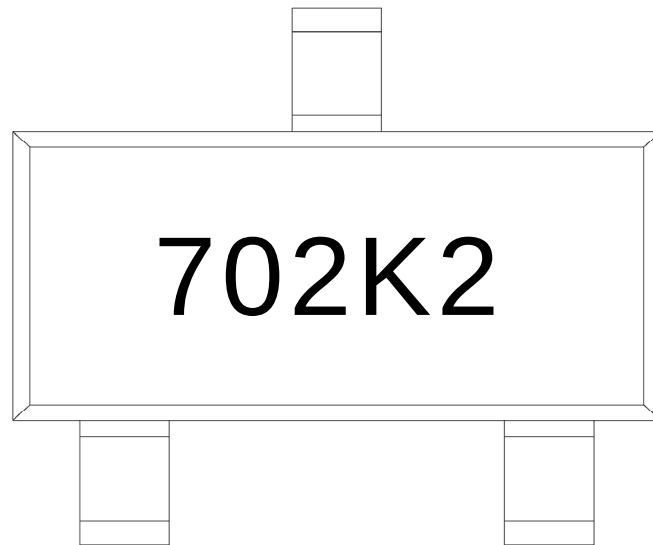

⌋ X

702K2 X

Note:

702K2: Product Type Code

Temperature Profile for IR Reflow Soldering(Pb-Free)

٢ ٣
1 ٤ 150 180 ٥ 60

Note: