

| E | 2017-4 |   |  |  |  |
|---|--------|---|--|--|--|
| F | 2020-5 | 1 |  |  |  |

Q


AEC-Q100

A 2022-8-18 all




!"#\$%  
Rev.A Aug.-2022

&'(')%\*++(


!"#\$




0 8 9 = > ? % % , % % + > - 3 ; 2 / 3 6 % @ J 6 2 6 3 ; - 2 / 0 ; / 3 % @ = 2 . - %

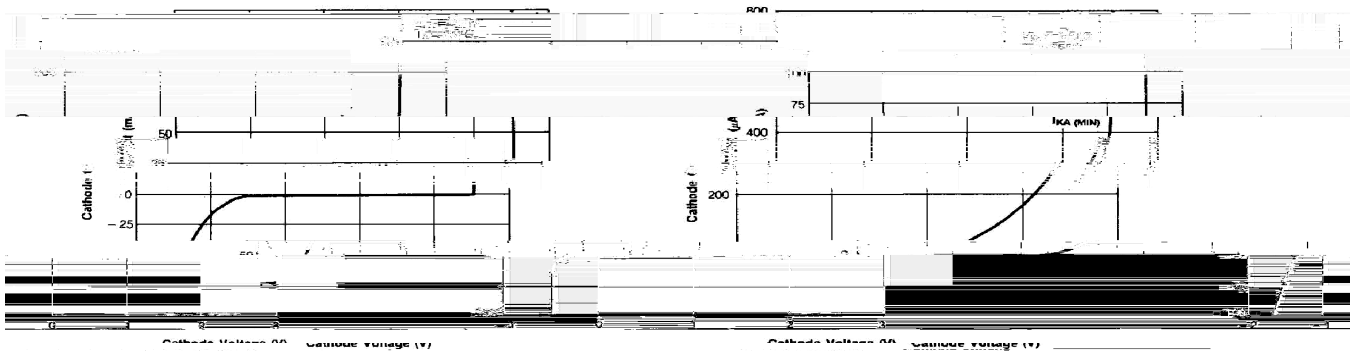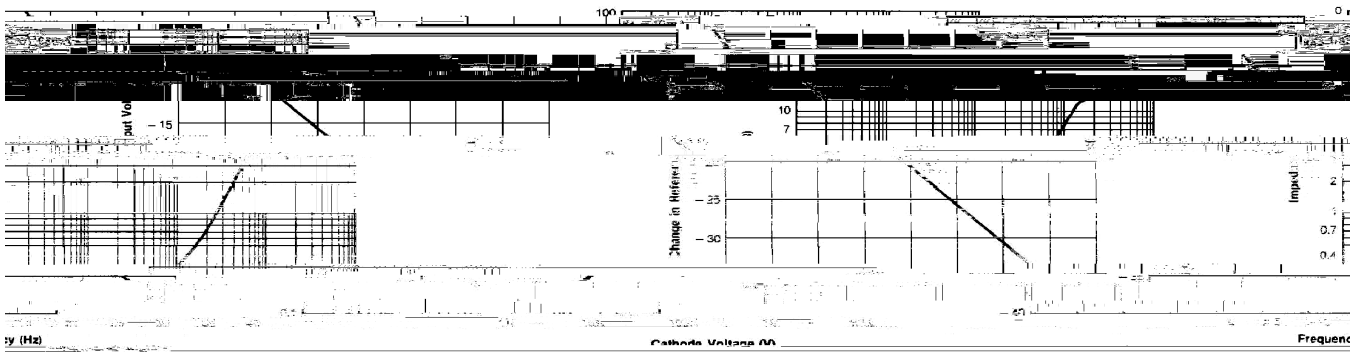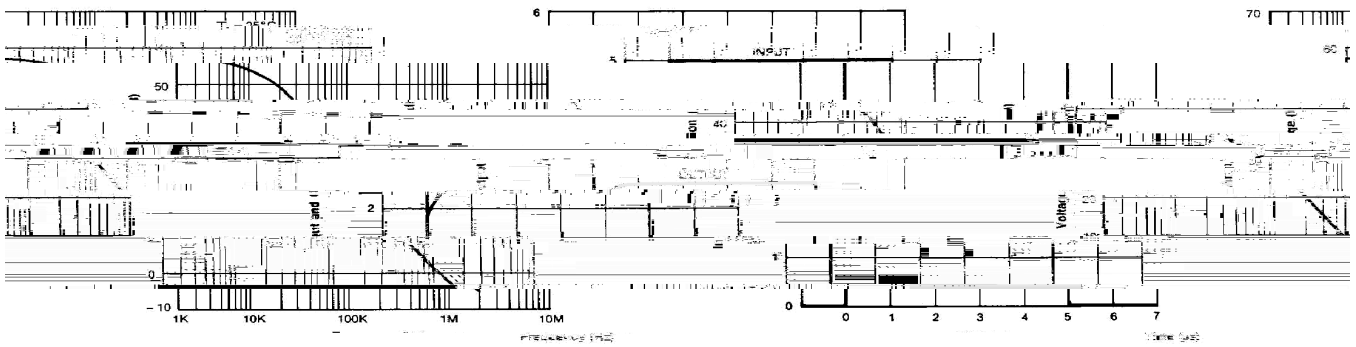





" # I J % % , % % # 627/89%N80;2=3;/480%

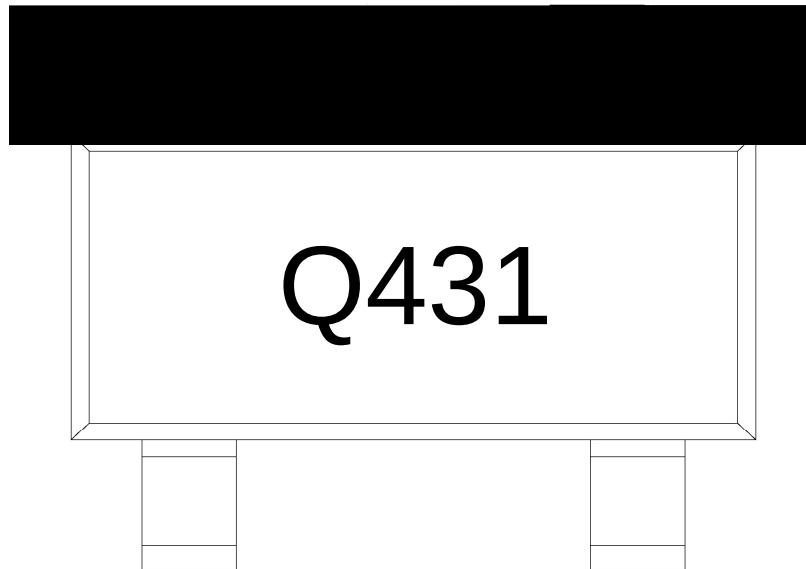


Q

431

Note:

Q: Automobile halogen-free product Code

431: Product Type



K L M N O = > ? F P Q I % , % % R S T U S V W X Y V S Z [ \ \ ] ^ \_ S Z [ \ V Z ` a Z a S ] \_ \ b Z c \ \_ d S V ^ e f g [ h i j V S S k

|  |
|--|
|  |
|  |
|  |
|  |
|  |
|  |
|  |

Note:

- |   |             |            |                                          |
|---|-------------|------------|------------------------------------------|
| 1 | 150 200     | 60 120sec; | 1.Preheating:150~200°C, Time:60~120sec.  |
| 2 | 255±5       | 5±0.5sec;  | 2.Peak Temp.:255±5°C, Duration:5±0.5sec. |
| 3 | 2 10°C/sec. |            | 3. Cooling Speed: 2~10°C/sec.            |

I M m n A o p q % , % % % - 0 / 0 ; 6 8 3 - % ; 4 % ) 4 > 1 - 2 / 8 9 % \* - 6 ; % ( - 0 ; % @ ° 1 0 ° 0 g