

ММ Ё ъ ђ ѡ ђ ђ

Ҳ, ɔ U/Ҳ, ɾ ɪ ɔ ʔ/ÄН ɤ ʏ ɵ

$\pi_0 \rightarrow \text{GF}(2) \times \text{GF}(2)$


/ Absolute Maximum Ratings(Ta=25)

V_{DS}	I_D	V_{GS}	D_{SS}



/ Electrical Characteristics(Ta=25)

V_{DS}	I_D	f_{sw}	η	ξ	ω_z	D_{SS}
		μ				
						μ
						μ
						μ
		μ				
						Ω
		Ω				


/ Electrical Characteristic Curve

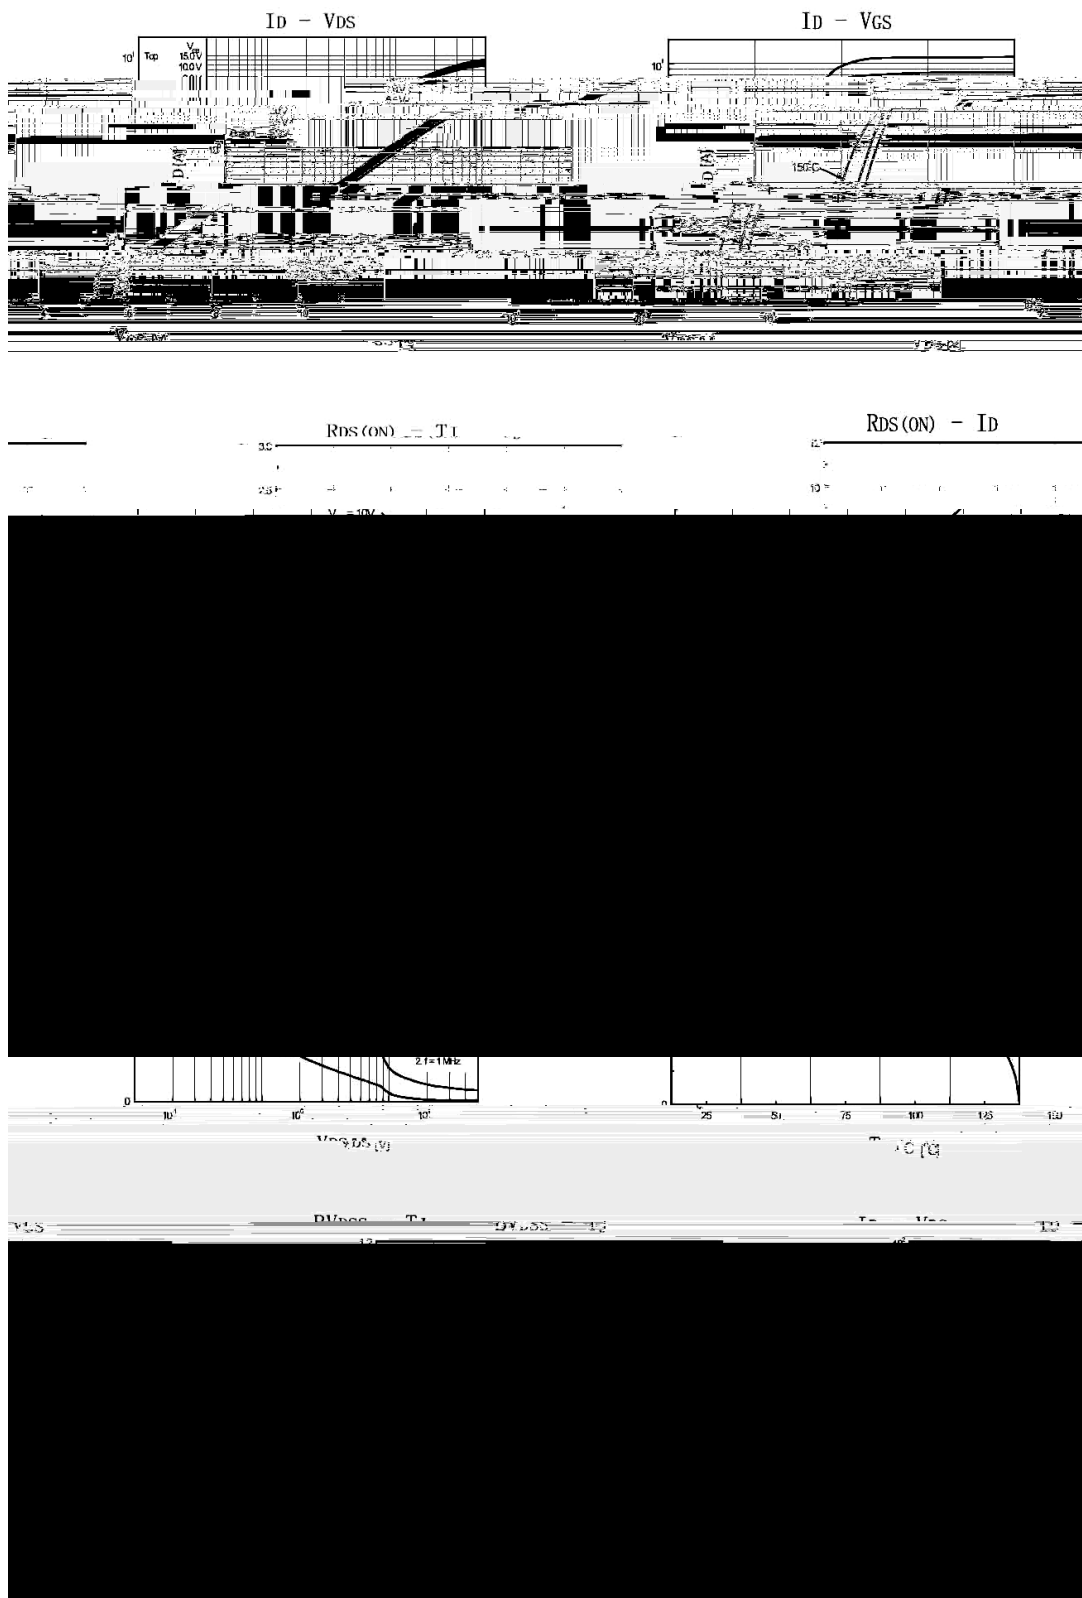


/ Package Dimensions

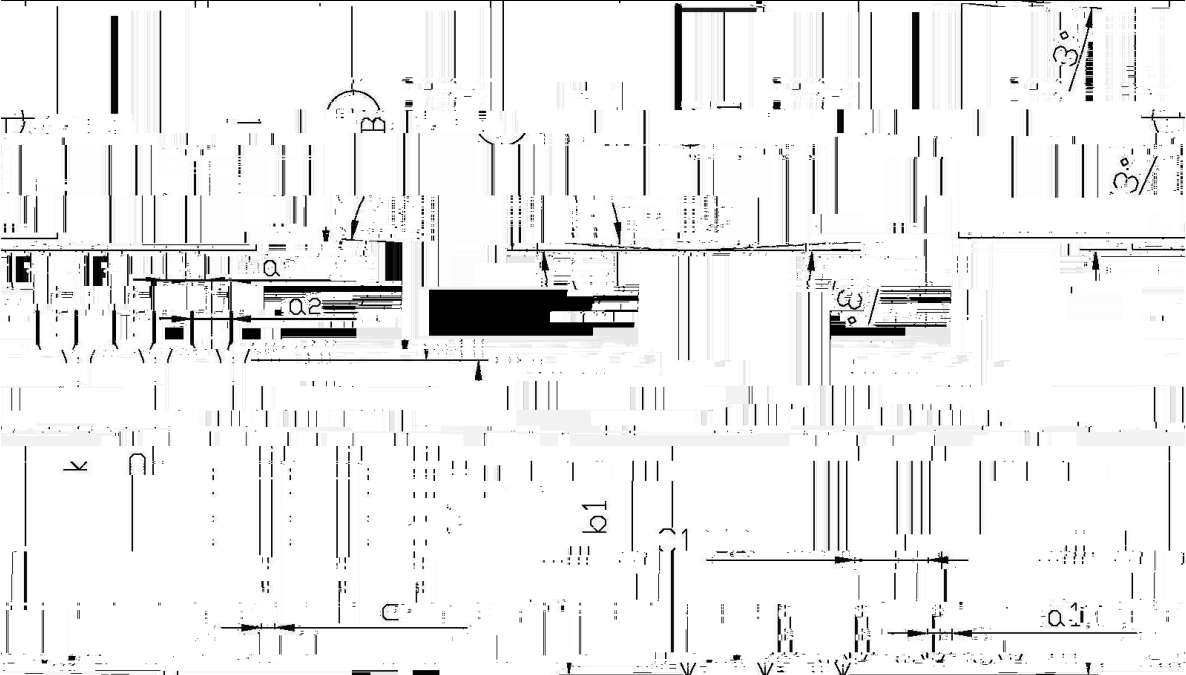

Dimensions in Millimeters				Dimensions in Millimeters				
Symbol	Min	Max	Symbol	Min	Max	Symbol	Min	Max
Δ	9.8	10.2	C	1.2	1.4			
D	2.56	2.64	D	6.3	6.7			
E	15.7	16.1	E	9.0	9.4			
F	12.0	12.4	F	12.0	12.4			
G	12.0	12.4	G	12.0	12.4			
H	12.0	12.4	H	12.0	12.4			
I	12.0	12.4	I	12.0	12.4			
J	12.0	12.4	J	12.0	12.4			
K	12.0	12.4	K	12.0	12.4			
L	12.0	12.4	L	12.0	12.4			
M	12.0	12.4	M	12.0	12.4			
N	12.0	12.4	N	12.0	12.4			
O	12.0	12.4	O	12.0	12.4			
P	12.0	12.4	P	12.0	12.4			
Q	12.0	12.4	Q	12.0	12.4			
R	12.0	12.4	R	12.0	12.4			
S	12.0	12.4	S	12.0	12.4			
T	12.0	12.4	T	12.0	12.4			
U	12.0	12.4	U	12.0	12.4			
V	12.0	12.4	V	12.0	12.4			
W	12.0	12.4	W	12.0	12.4			
X	12.0	12.4	X	12.0	12.4			
Y	12.0	12.4	Y	12.0	12.4			
Z	12.0	12.4	Z	12.0	12.4			
145			02			125		

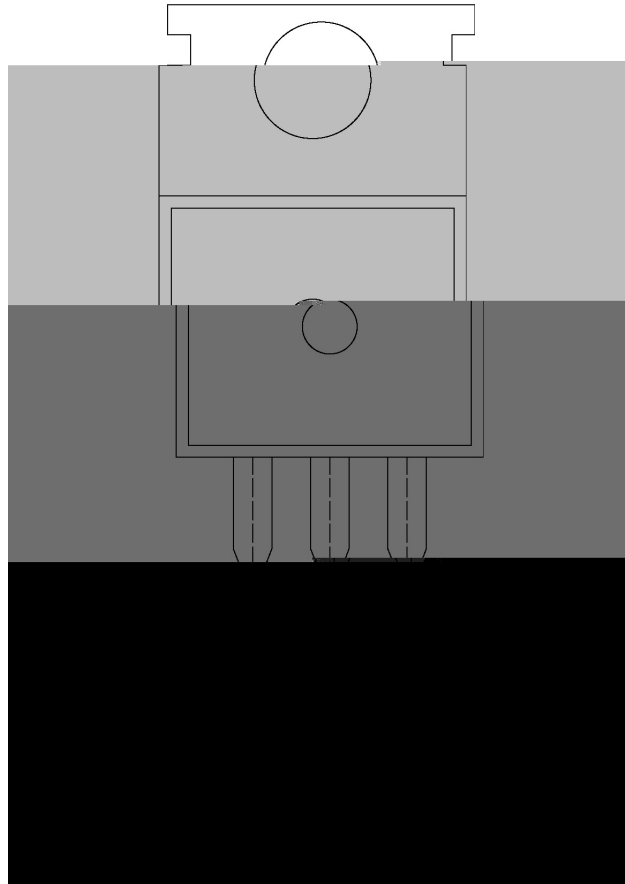

() / Temperature Profile for Dip Soldering(Pb-Free)

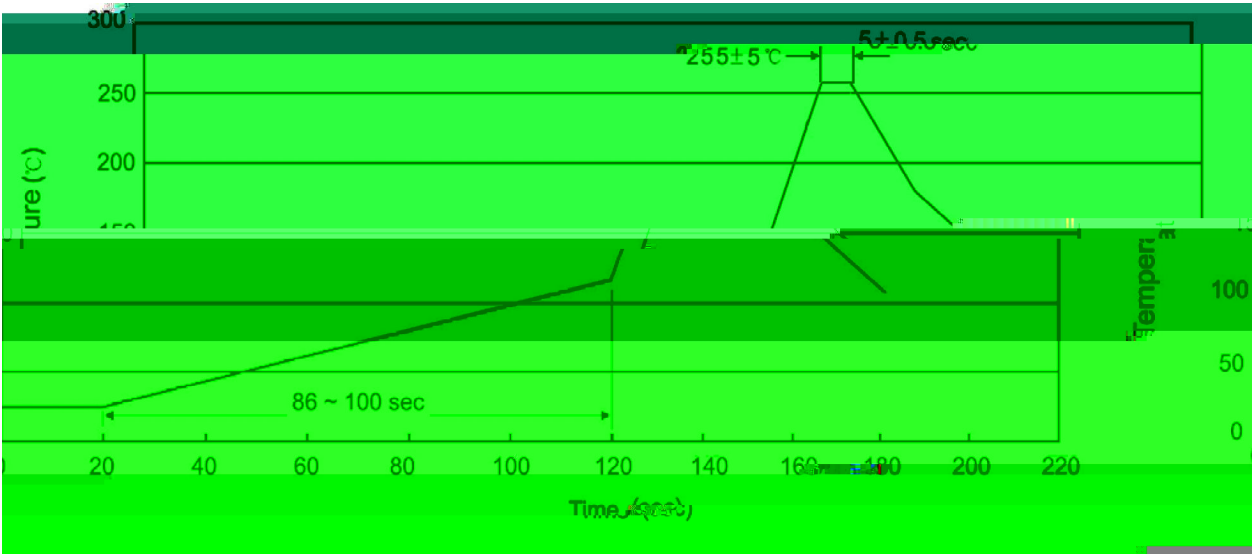

℃ ×