



BR8N60

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	600	V
Drain Current	$I_D(T_c=25^\circ\text{C})$	8	A
Drain Current	$I_D(T_c=100^\circ\text{C})$	4.6	A
Drain Current - Pulsed	I_{DM}	30	A
Gate-Source Voltage	V_{GSS}	± 30	V
Single Pulsed Avalanche Energy	E_{AS}	230	mJ
Repetitive Avalanche Energy	E_{AR}	10	mJ
Avalanche Current	I_{AR}	7.5	A
Power Dissipation			

/ Electrical Characteristic Curve

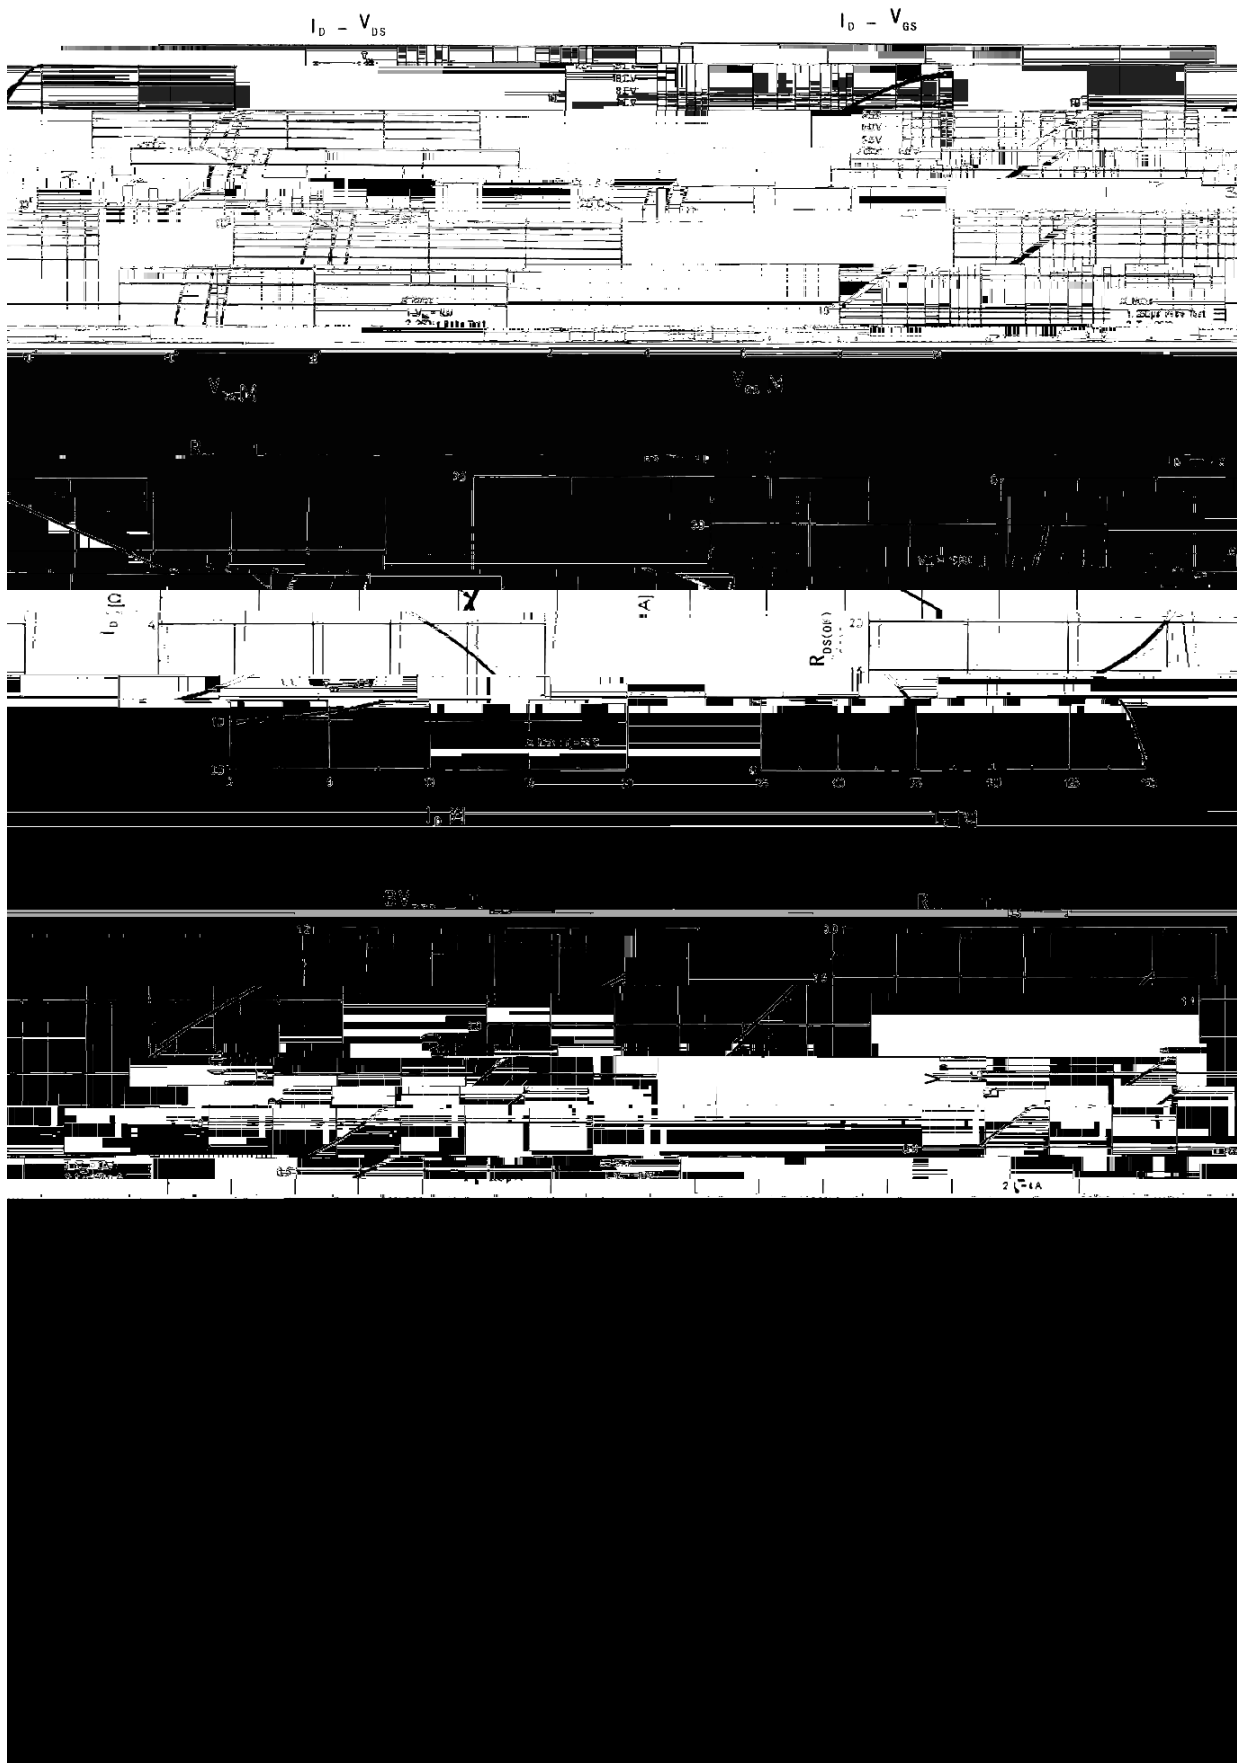


/ Package Dimensions



Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	1.2	1.4
B	3.56	3.64	D	6.3	6.7
E	15.7	16.1	F	9.3	9.4
G	2.54	2.61	H	2.2	2.3
I	9.6	9.7	J	0.7	0.9
K	1.25	1.45	L	0.7	0.9
M	1.25	1.45	N	0.7	0.9
O	1.25	1.45	P	0.7	0.9
Q	1.25	1.45	R	0.7	0.9
S	1.25	1.45	T	0.7	0.9
U	1.25	1.45	V	0.7	0.9
W	1.25	1.45	X	0.7	0.9
Y	1.25	1.45	Z	0.7	0.9

/ Marking Instructions

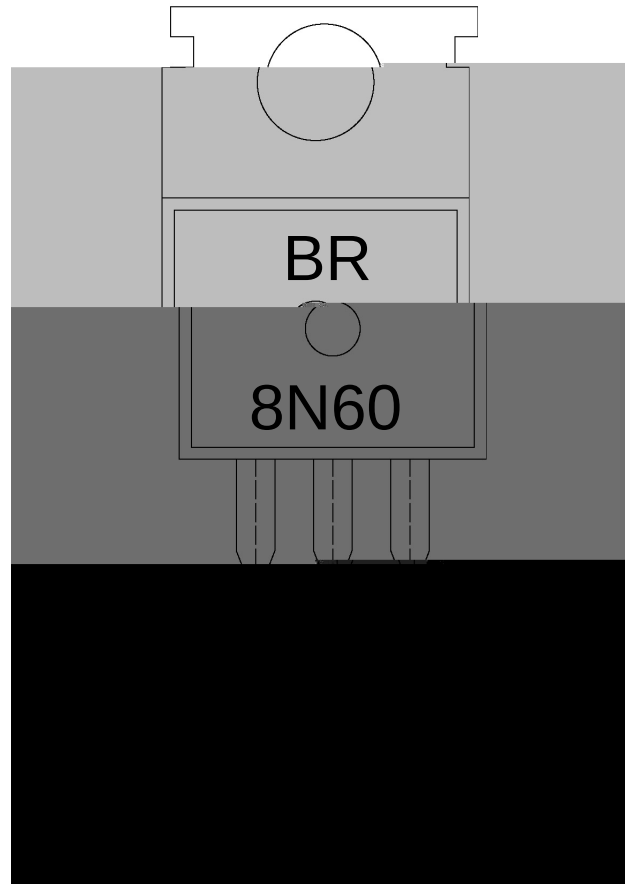

BR

8N60


Note:

BR: Company Code

8N60: Product Type.

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

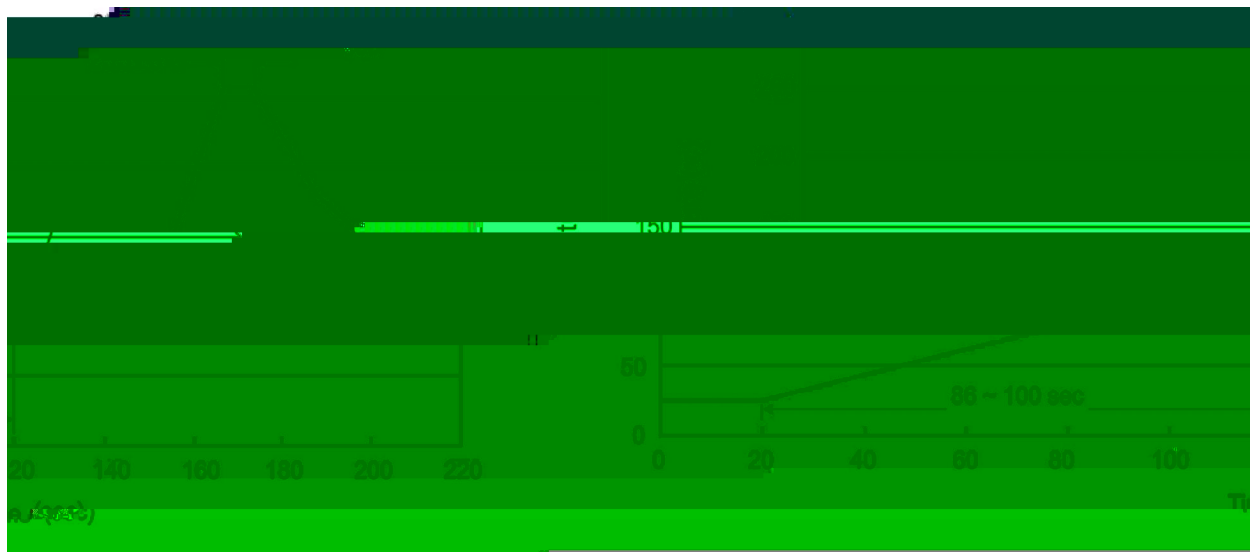

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension (unit mm ³)		

/ TUBE

Package Type	Units					Dimension (unit mm ³)		