



TO-262 N MOS N-CHANNEL MOSFET in a TO-262 Plastic Package..

Low gate charge, low crss, fast switching.


DC/DC


These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.



PIN1 G PIN 2 D PIN 3 S

See Marking Instructions.

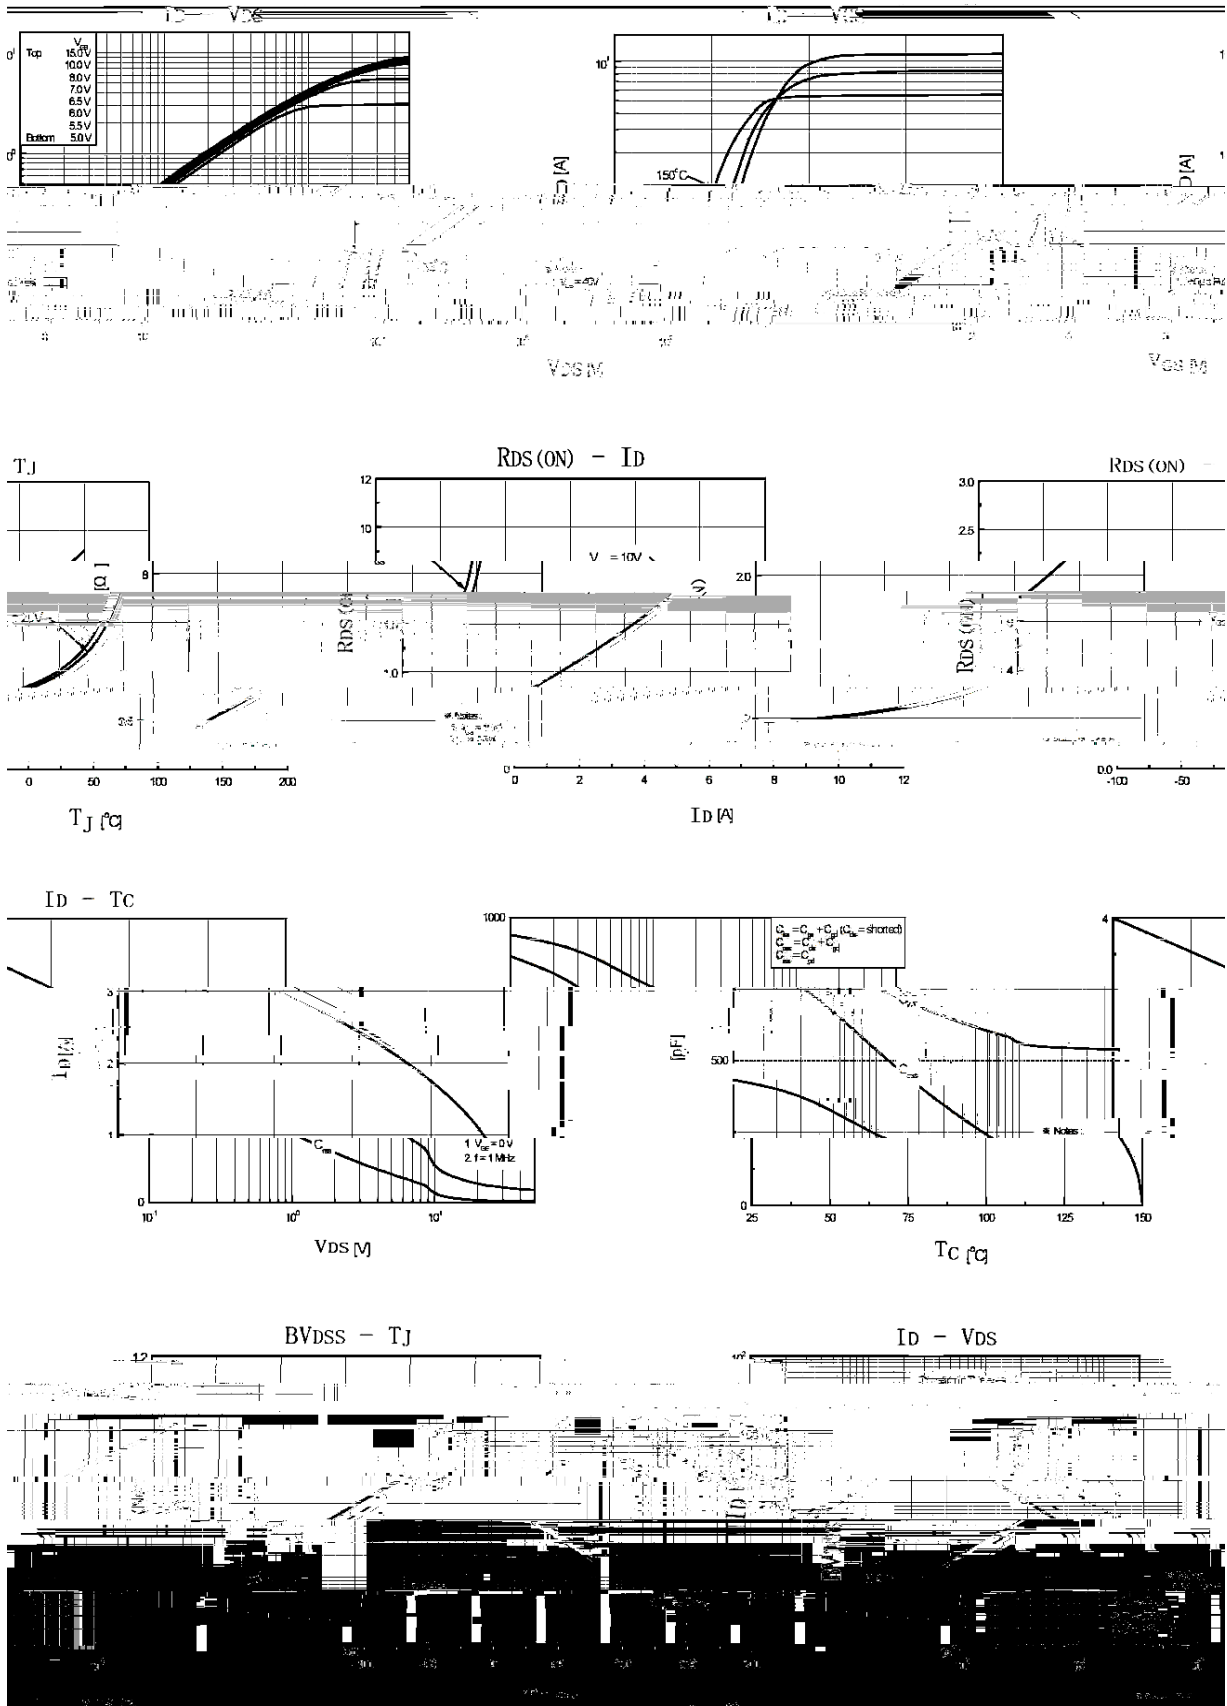

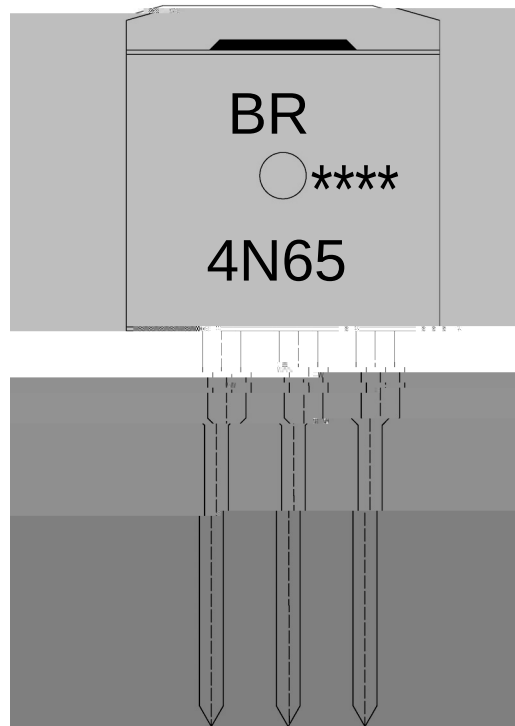

BR


4N65

Note:

BR: Company Code

4N65: Product Type.

****: Lot No. Code, code change with Lot No.

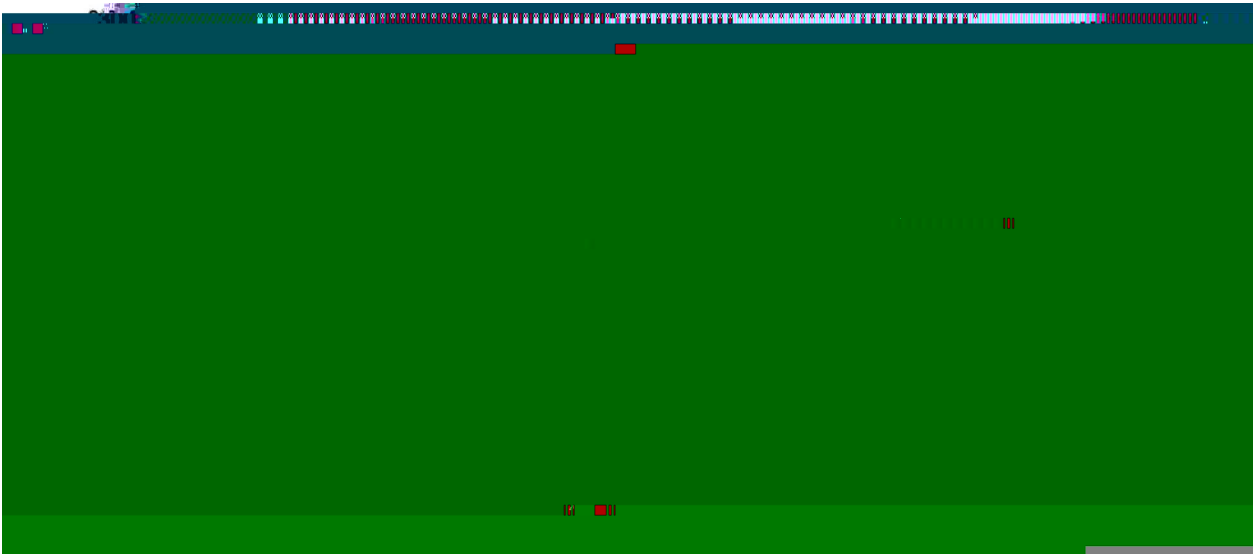

- 1

25 150

60 90sec;

2

255±5

5±0.5sec;

3

2 10

/sec.
- Note:

1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:255±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

270±5

10±1 sec.

Temp.:270±5

Time:10±1 sec

/ TUBE

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
TO-262	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180