




BRB7N60
Rev.D May.-2016

Parameter	Symbol	Rating	Unit
-----------	--------	--------	------


/ Electrical Characteristic Curve

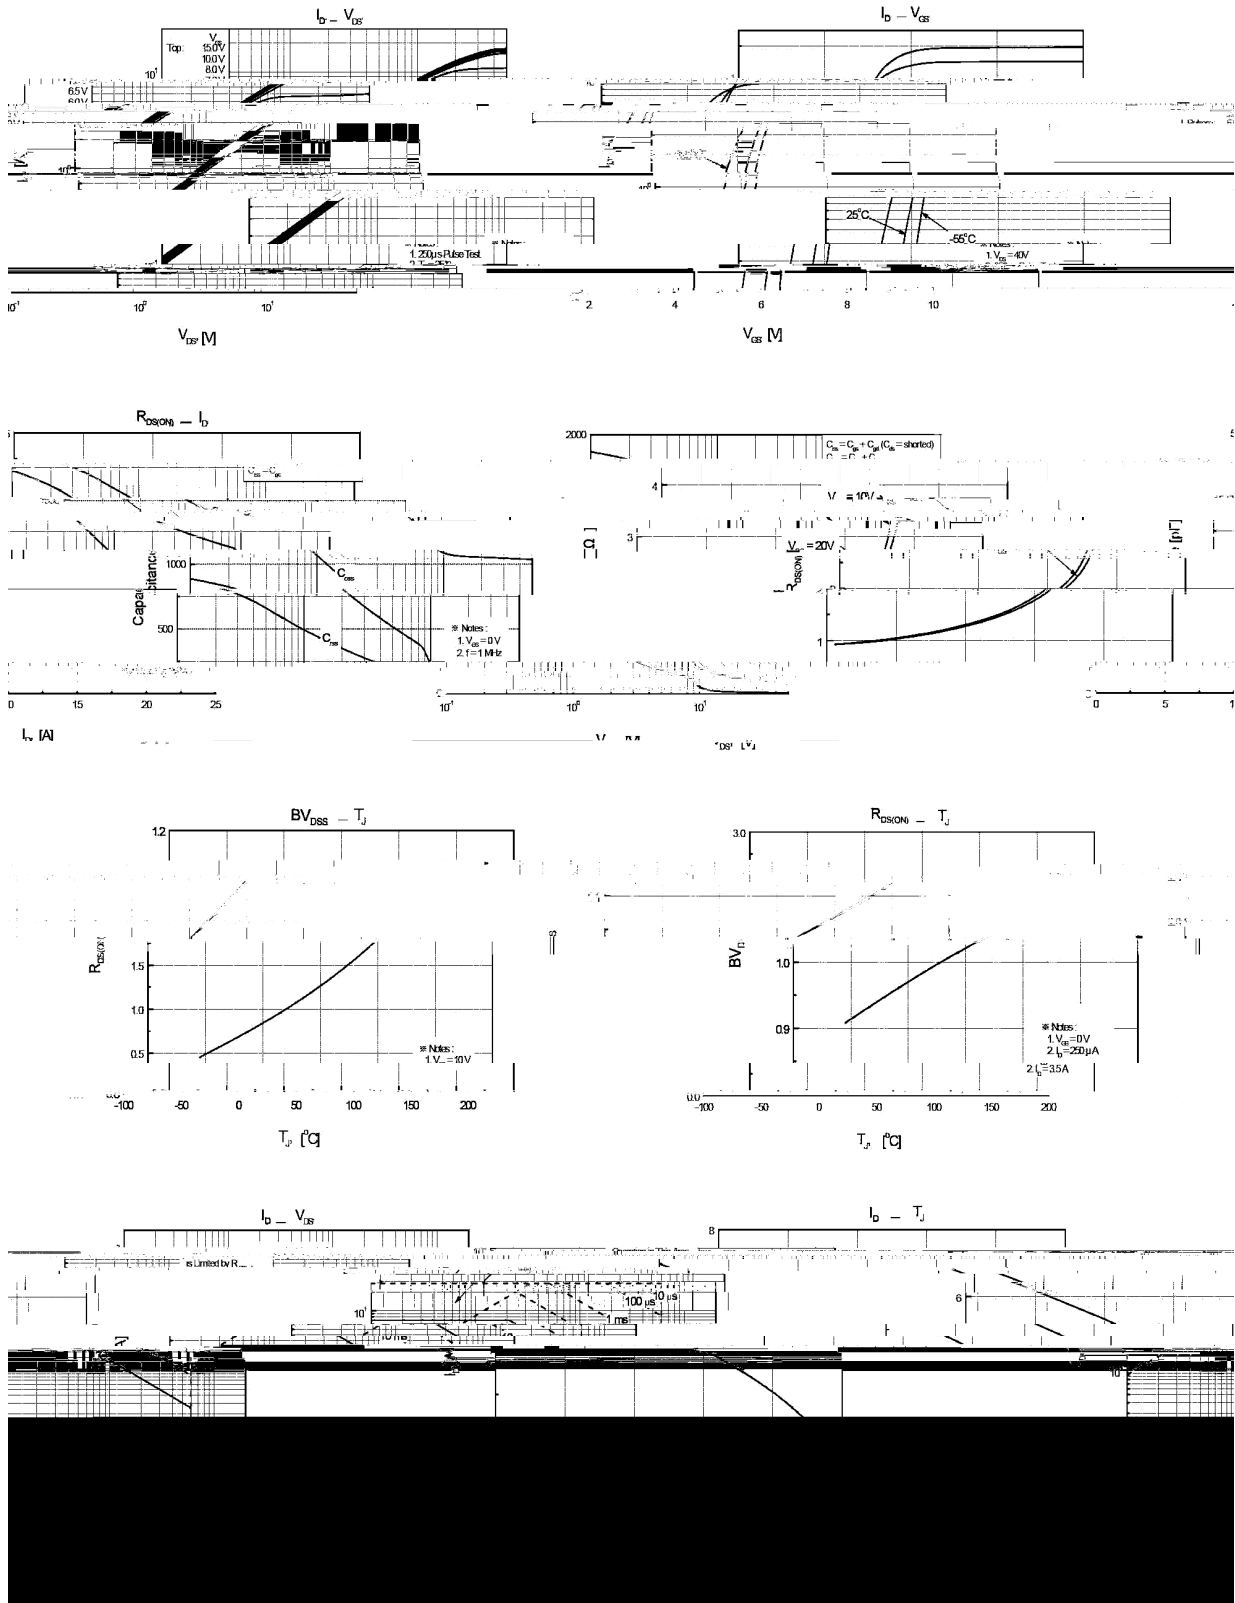

/ Package Dimensions

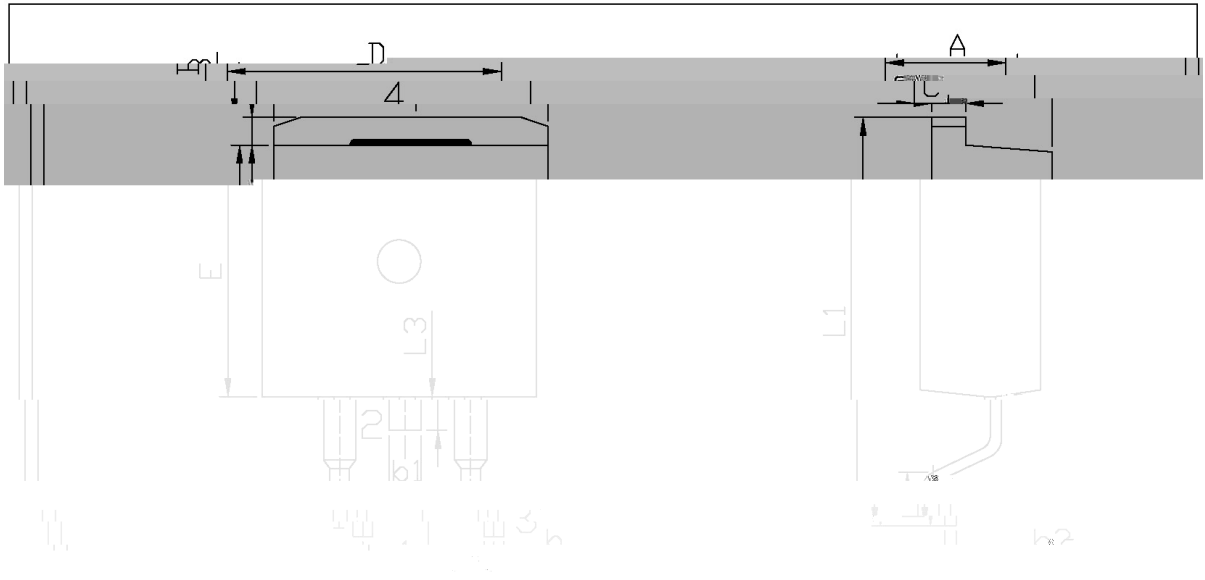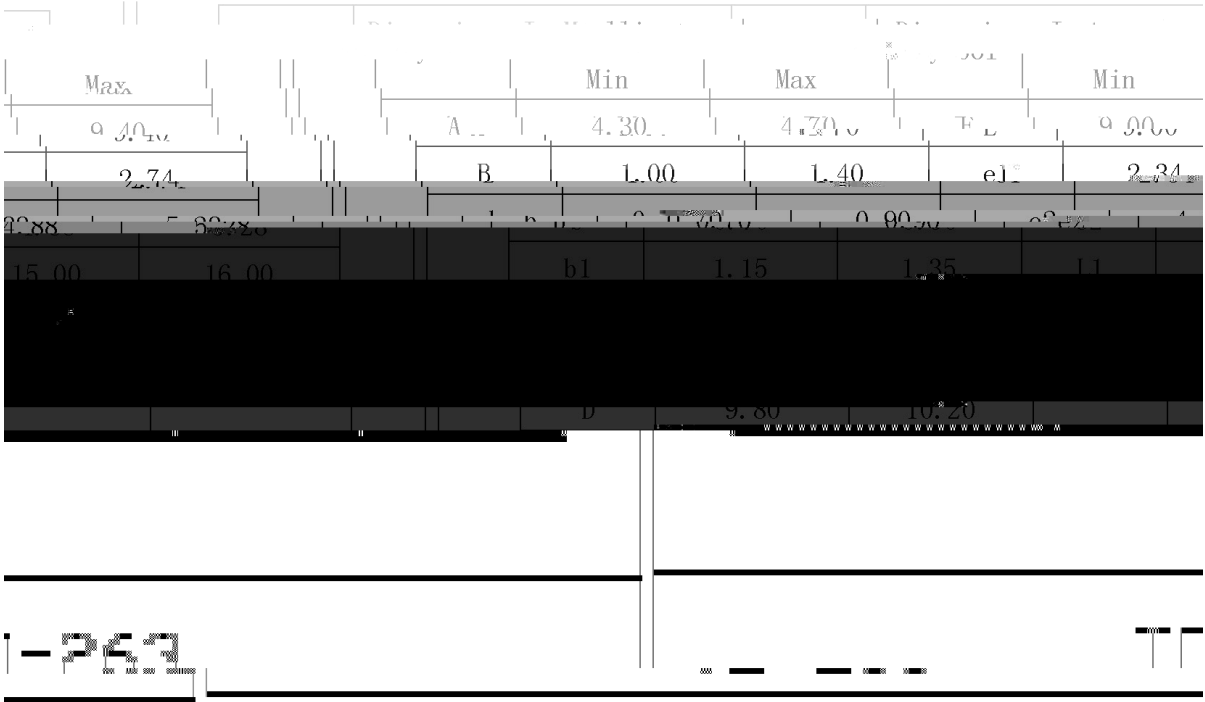

/ Marking Instructions

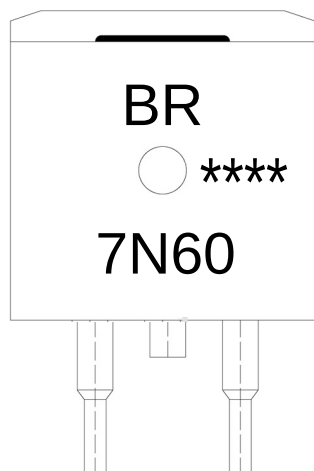

б " X

BR X

7N60 X

---- X

Note:

BR:

7N60:

****:

BR X

7N60 X


---- X

Company Code

Product Type.

Lot No. Code, code change with Lot No.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

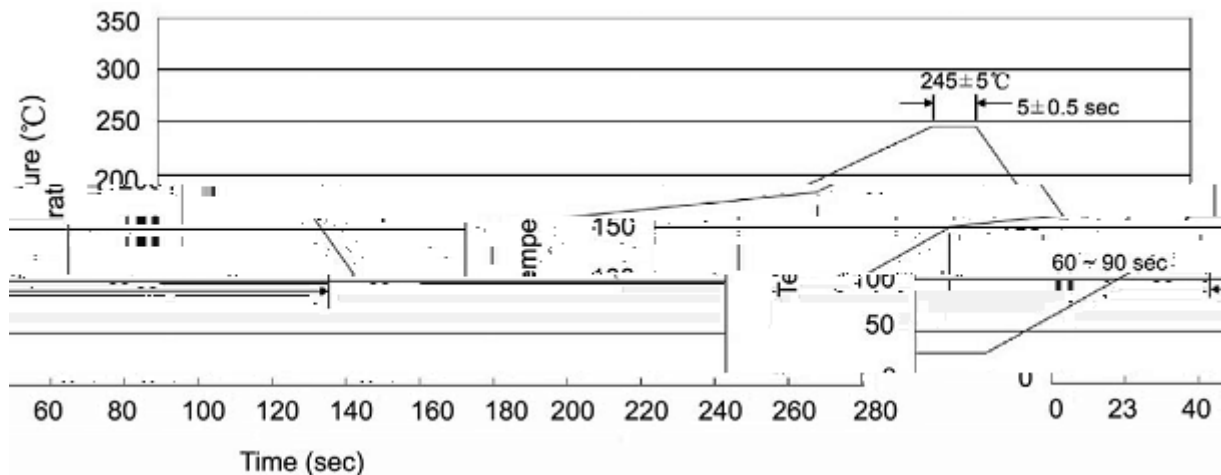

注意:

1. 预加热: 25~150 °C, Time: 60~90sec;
2. 峰值温度: 245±5 °C, 持续时间: 5±0.5sec;
3. 冷却速度: 2~10 °C/sec.

Note:

1. Preheating: 25~150 °C, Time: 60~90sec.
2. Peak Temp.: 245±5 °C, Duration: 5±0.5sec.
3. Cooling Speed: 2~10 °C/sec.

/ Resistance to Soldering Heat Test Conditions

测试条件: 260±5 °C, Time: 10±1 sec. Temp.: 260±5 Time: 10±1 sec

/ Packaging SPEC.

包装形式: REEL

Package Type	Units					Dimension (unit: mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
TO-263	800	1	800	5	4,000	13 × 24	360×360×50	385×257×392

包装形式: TUBE

Package Type	Units					Dimension (unit: mm ³)		
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box