

BRC07550RTAQ

/ Descriptions

SOT-89 3pin 50V 50mA


/ Features

1. 50V 50mA
2. 3pin SOT-89 package
3. AEC-Q100 qualified


/ Applications

1. 50V 50mA

/ Equivalent Circuit

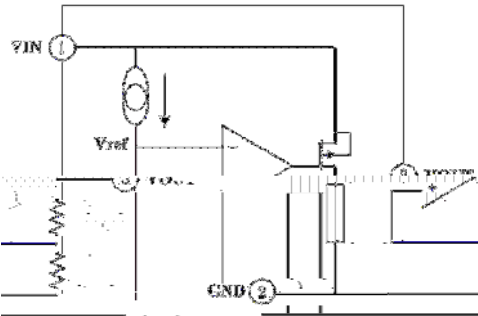

/ Pinning

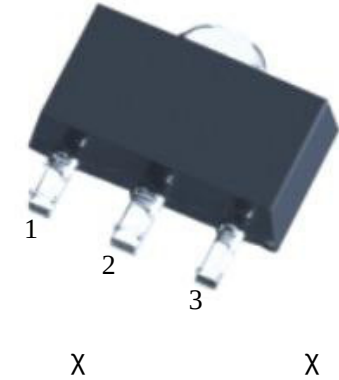

/ Marking

0 M 1 2 3

$v \text{ } ^{\circ}\Omega$	$\gamma \text{ } ^N$	$^{\circ}\Omega \ddot{\Theta}$	D

[illegible]

v^{ω_Q}	γ^N	$\mathbb{J}^{\dagger} \tau$	$\omega_{\eta} \ddot{\Theta}$	$\varepsilon_{\mathfrak{Z}} \ddot{\Theta}$	$\omega_{\mathfrak{Z}} \ddot{\Theta}$	$\mathfrak{D}$
		$\leq \leq$				

/ Electrical Characteristic Curve

图 3 线路调整率

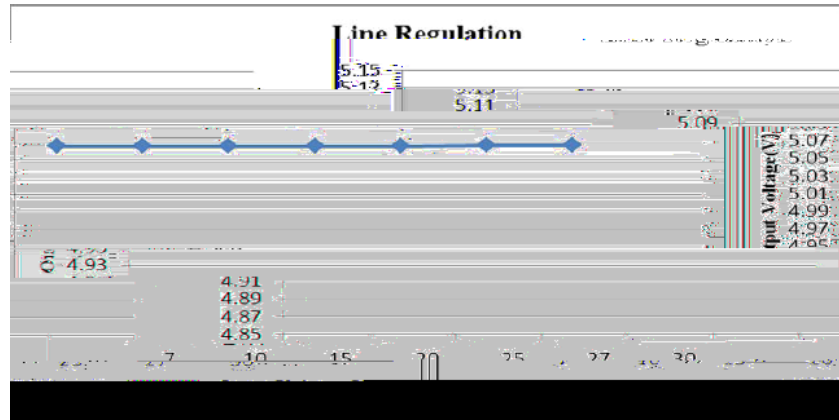


图 4 负载调整率

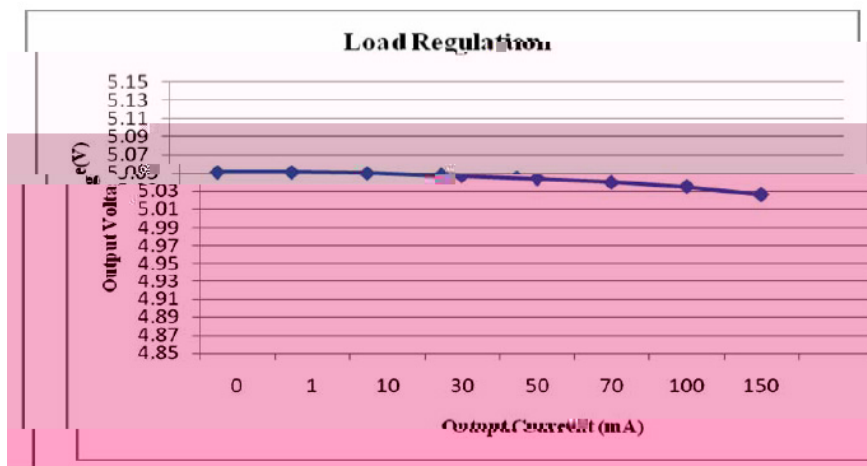


图 5 温度漂移


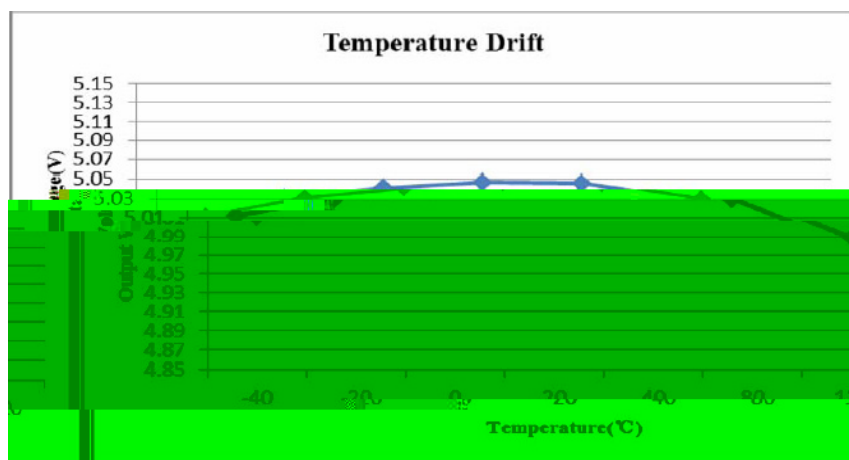



图 6 负载调整率

/ Typical Application Circuit


9 Z 1

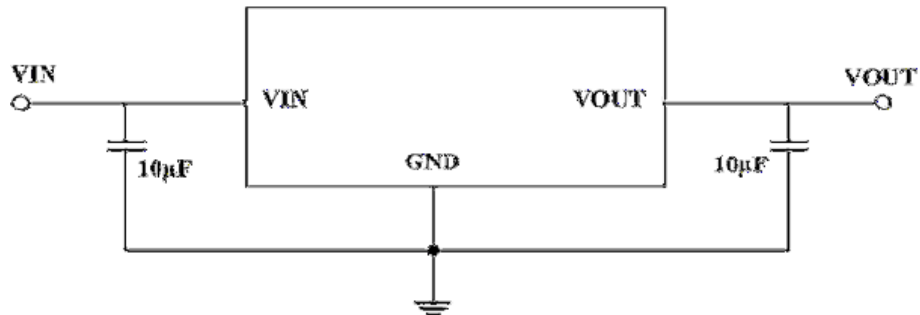


ج, ز د ل د ر ا د ` ن

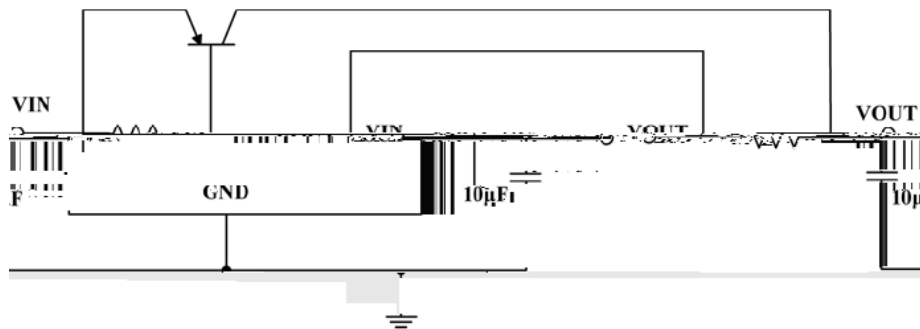

~ د 3 1 ز 1

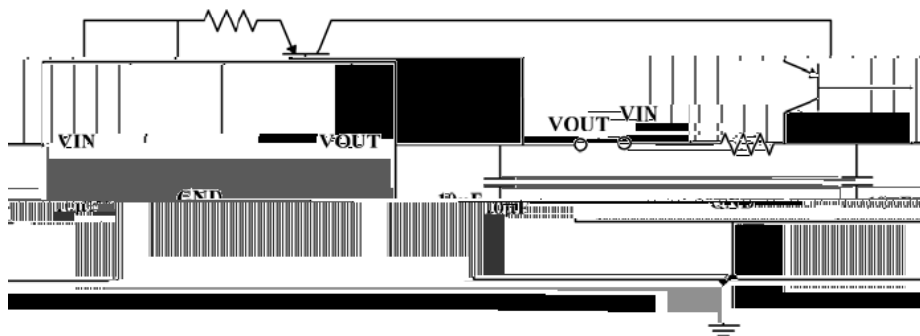

/ Package Dimensions

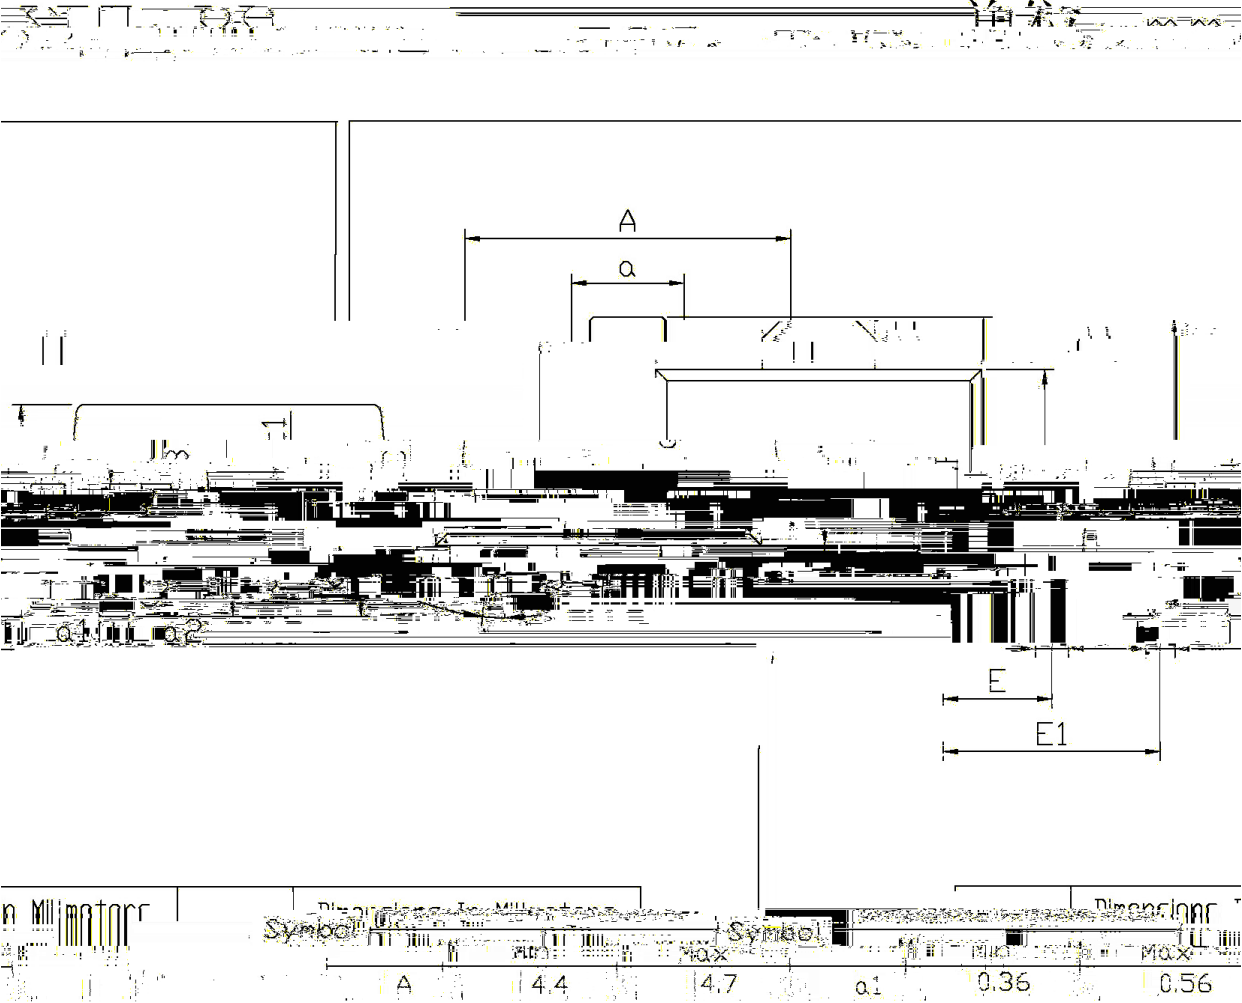

BRC07550RTAQ