

/ Descriptions

VRW0;< E H 1 4


/ Features

H 1 ǎ H □ 4 4 "Ω 2 3 3 63Y 2 3 5.8μD 3 3 4 ±5%
H
μ ±


/ Applications

7 1 3 4 \$ 5 \$ 6 7 8 9 \$

/ Equivalent Circuit

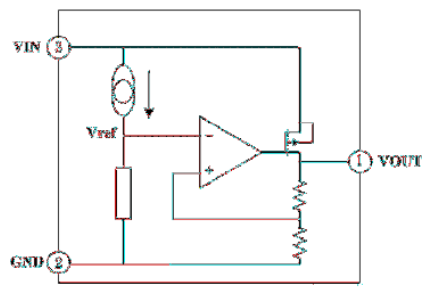

/ Pinning

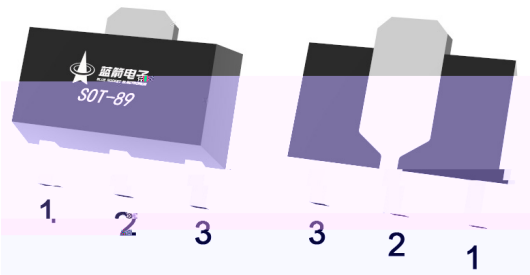

/ Marking

8 4 6 "

/ Electrical Characteristic Curve

图 3 线路调整率

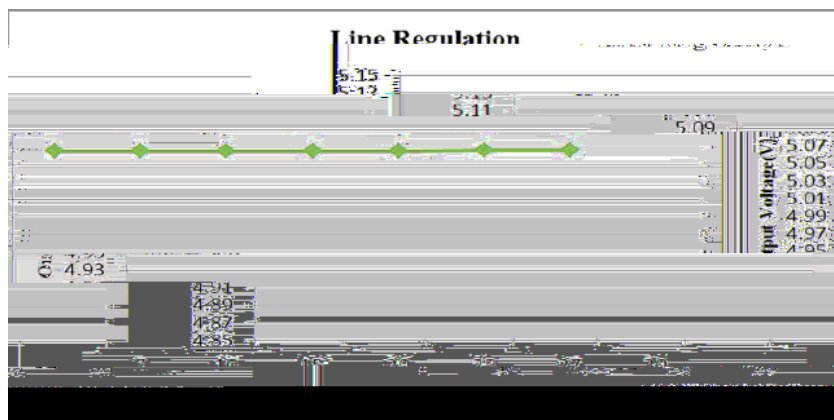


图 4 负载调整率



图 5 温度漂移


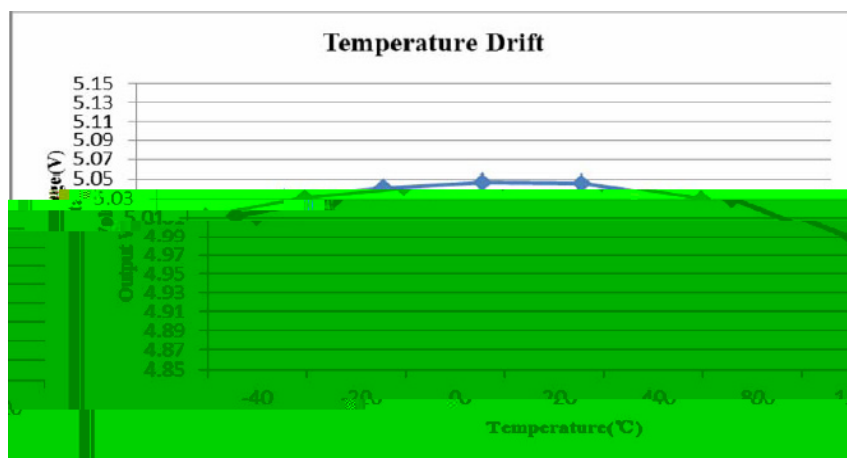



图 6 纹波抑制比

/ Typical Application Circuit


١

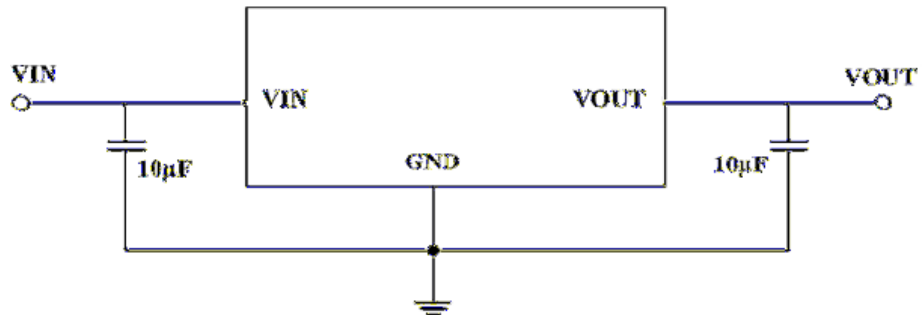

٢ د ك ل ا ج

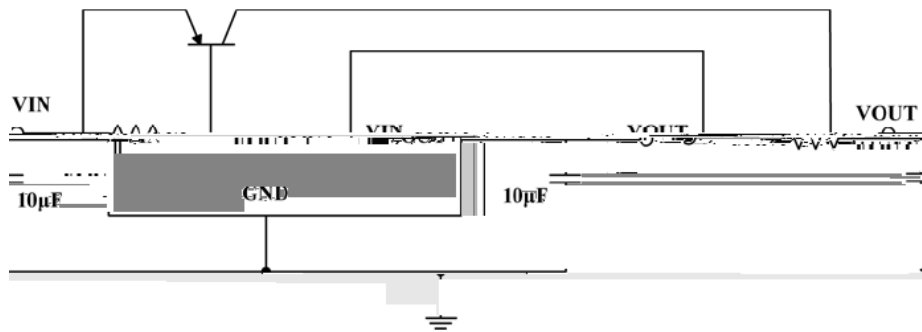


٣ ا ب ج د

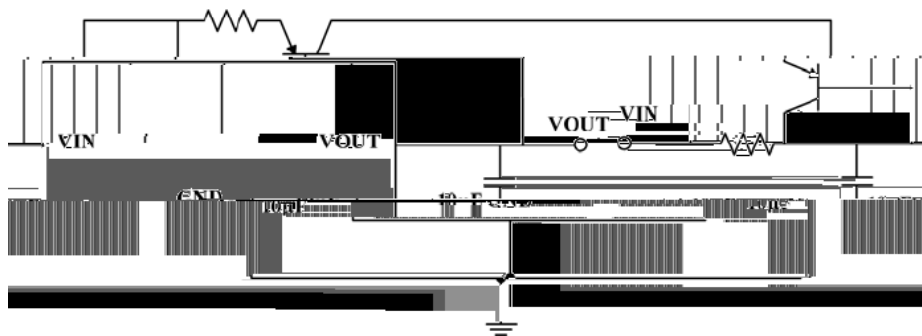


/ Typical Application Circuit


ن د د ر

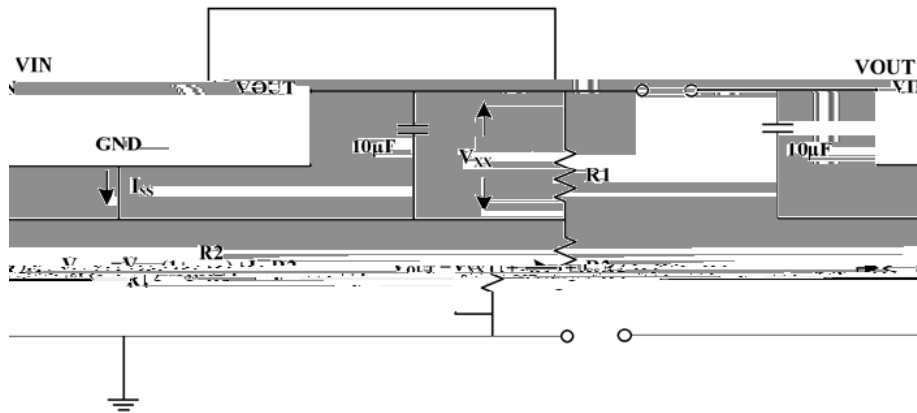


ن د د ر

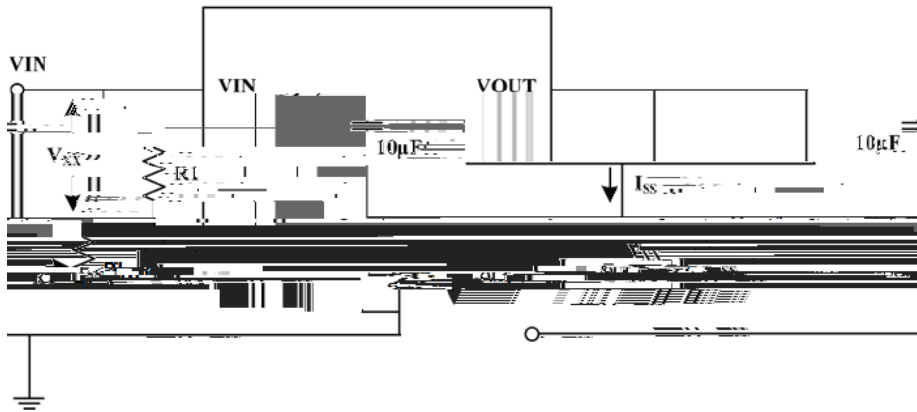

ن د ر

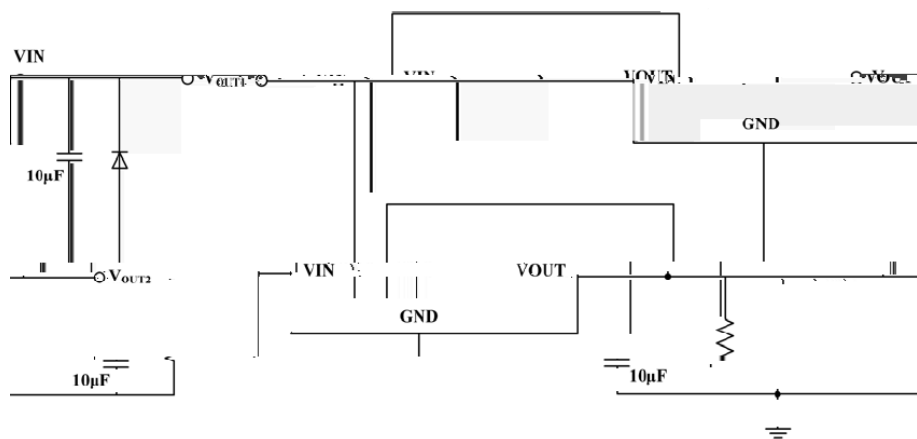

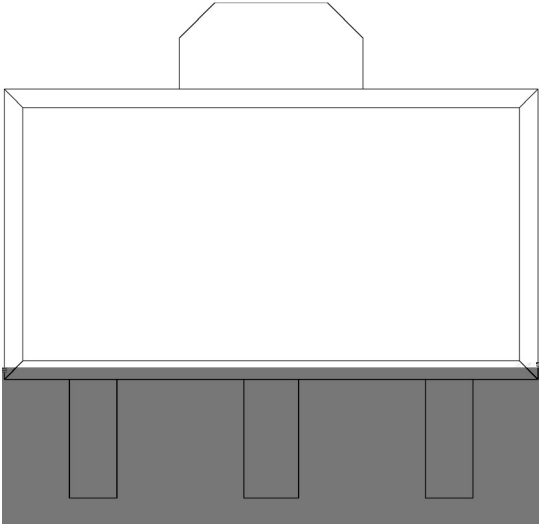

BRCO7550STA



DATA SHEET