

BRCS006N03SSL

Rev.C Jan.-2026



DATA SHEET

LFP5K5x6

BRCS006N03SSL

Rev.C Jan.-2026

DATA SHEET


Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	30	V
Drain Current	$I_D(T_c=25^\circ\text{C})$	300	A
	$I_D(T_c=100^\circ\text{C})$	300	A
Pulsed Drain Current	I_{DM}	1200	A
Gate-Source Voltage	V_{GS}	20	V
Single Pulsed Avalanche Energy $L=1.0\text{mH}$	E_{AS}	1624	mJ
Continuous-Source Current	I_S	300	A
Total Power Dissipation	$P_D(T_c=25^\circ\text{C})$	375	W
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 175	

Thermal Resist16 85(Thermal Res)-8.7(7.08.48 ref388.74 610.64 .4799898 346.14 78-)TJ7.01 1 Ambie01370138



/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Total Gate Charge	Q_g	$V_{GS}=10V, \quad V_{DS}=15V,$ $I_D=50A$		306		nC
Gate Source Charge	Q_{gs}			63		
Gate Drain Charge	Q_{gd}			44		
Turn-On Delay Time	$t_{d(on)}$	$V_{GEN}=10V \quad V_{DS}=15V$ $R_L=0.3\Omega \quad R_G=3.9\Omega$ $I_{DS}=50A$		23		ns
Turn-On Rise Time	t_r			151		
Turn-Off Delay Time	$t_{d(off)}$			249		
Turn-Off Fall Time	t_f			127		



/ Electrical Characteristic Curve

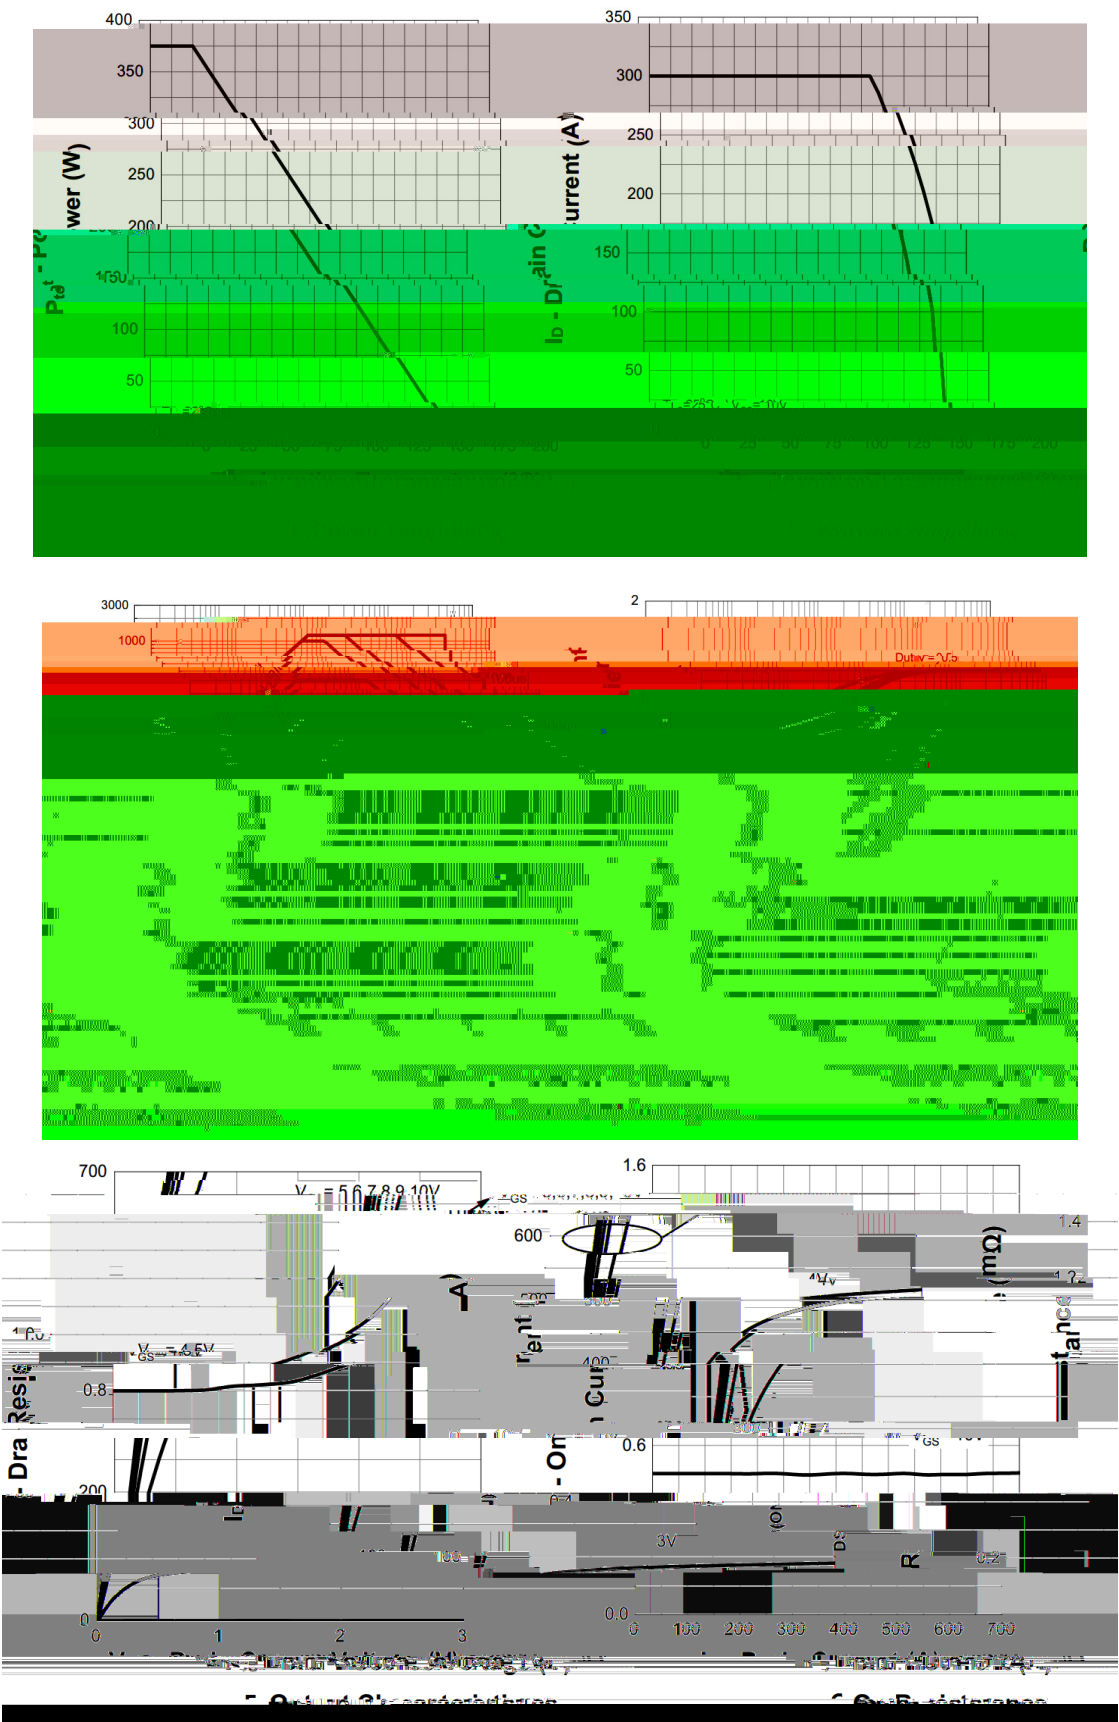

/ Electrical Characteristic Curve

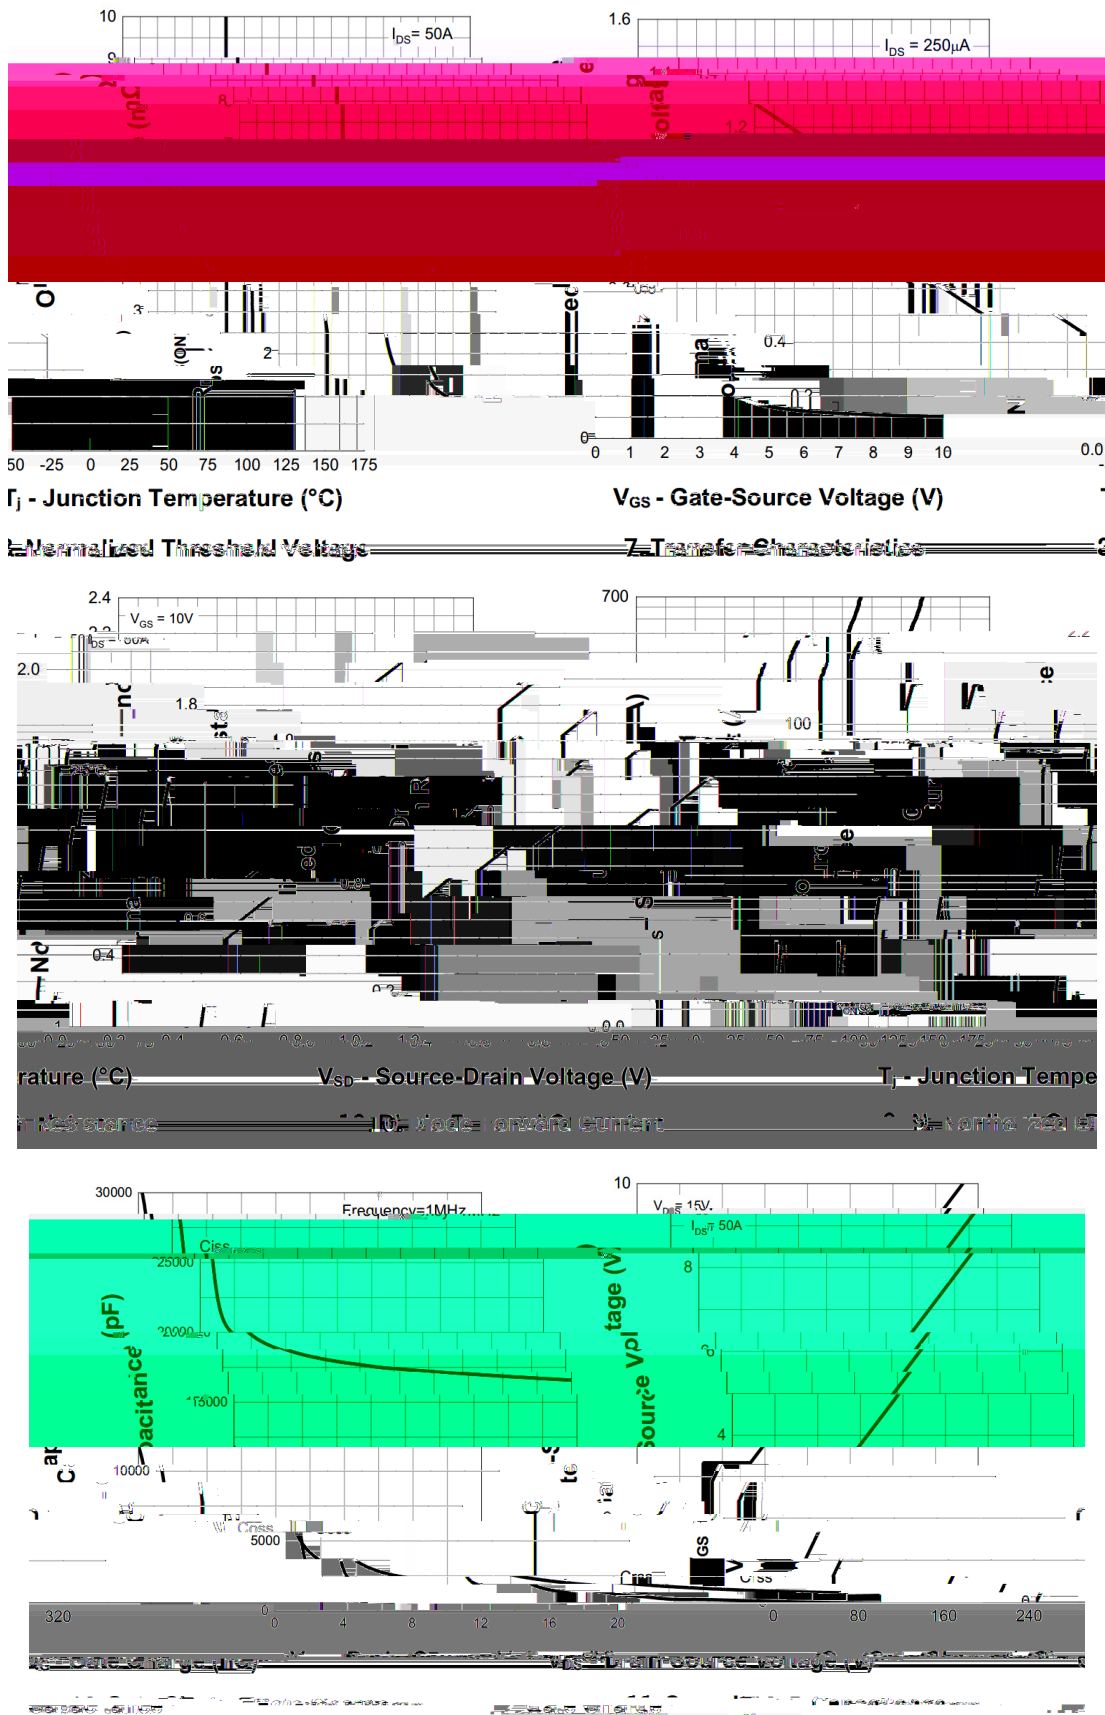

/ Package Dimensions

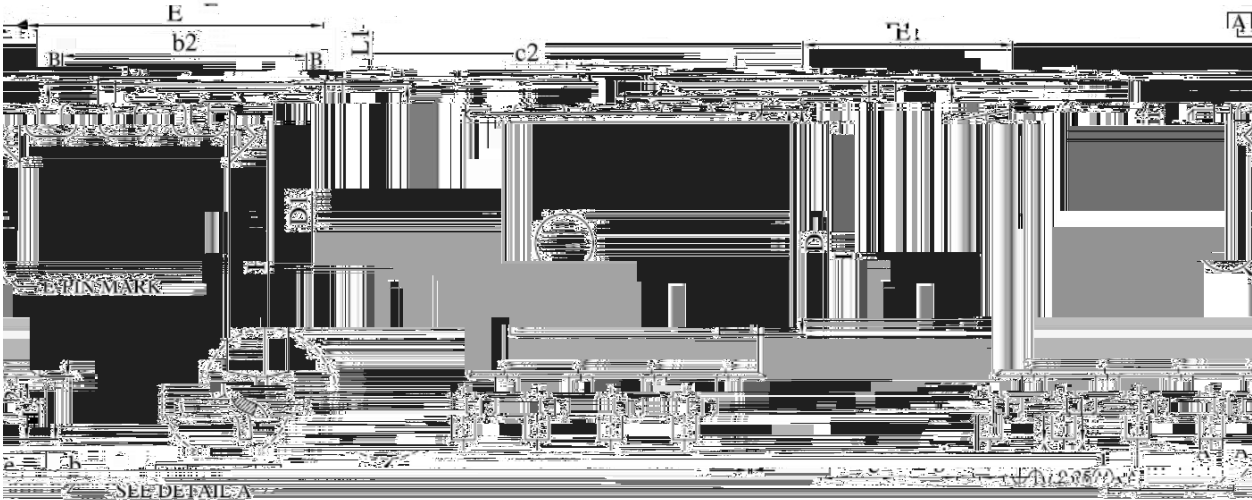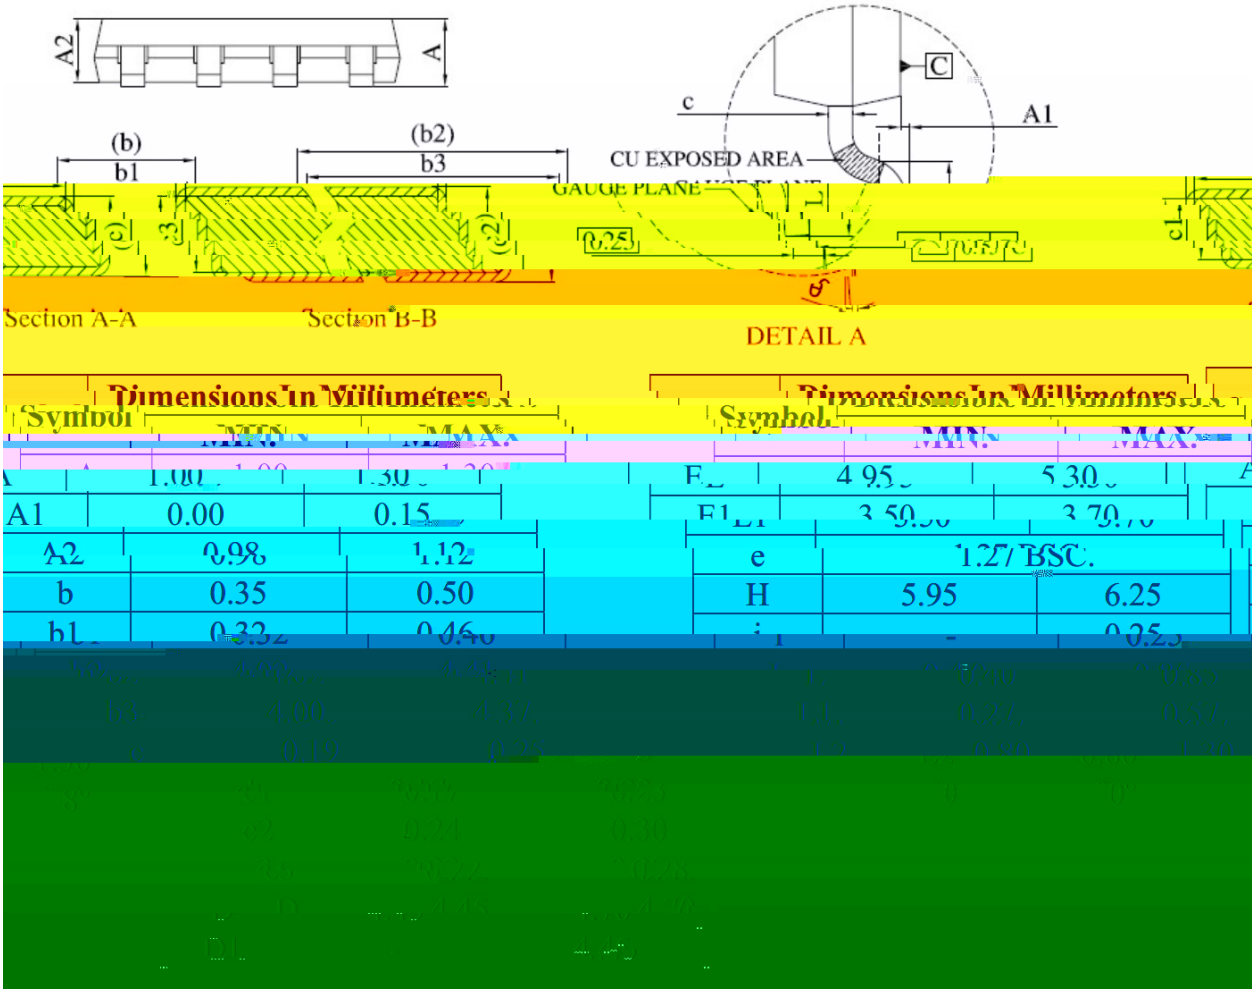

/ Marking Instructions



BR

006N03S

Note

BR: Company Code

006N03S: Product Type Code

****: Lot No. Code, code change with Lot No.

BRCS006N03SSL

Rev.C Jan.-2026



蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

() / Temperature Prob