"Yت / Descriptions


◕ È / Features

≤ Ω Ω


٧ ﻉ / Applications

BMS

Л ق ً ۊ ٪ ع / Equivalent Circuit



ã ﺍ ﻭ ً / Pinning

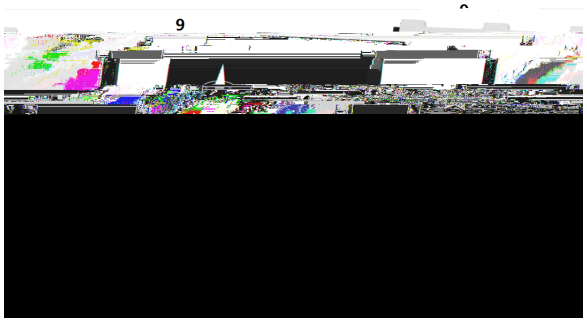


ﻁ ﻫ ﺟ / Marking

		Ω Ω				
		I_{DS} = 50 A, V_{GS} = 0 V				
		dI_{SD}/dt = 100 A/μs				


Note 1 Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.


Note 2 Guaranteed by design, not subject to production testing.

≠ ∃ ̃Ạ´E ∀ ∫ / Electrical Characteristic Curve

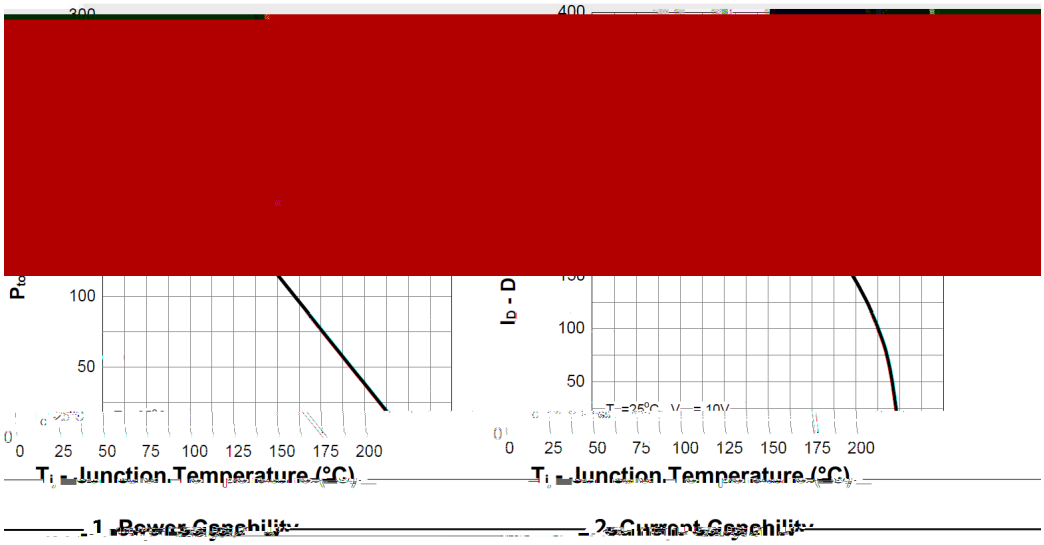



1 Power Capability 2 Current Capability

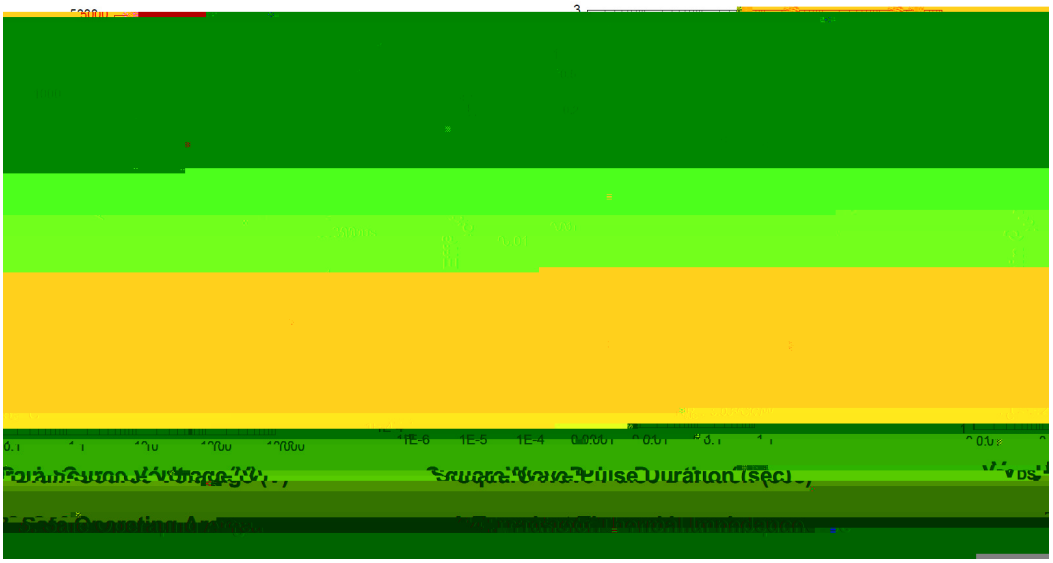


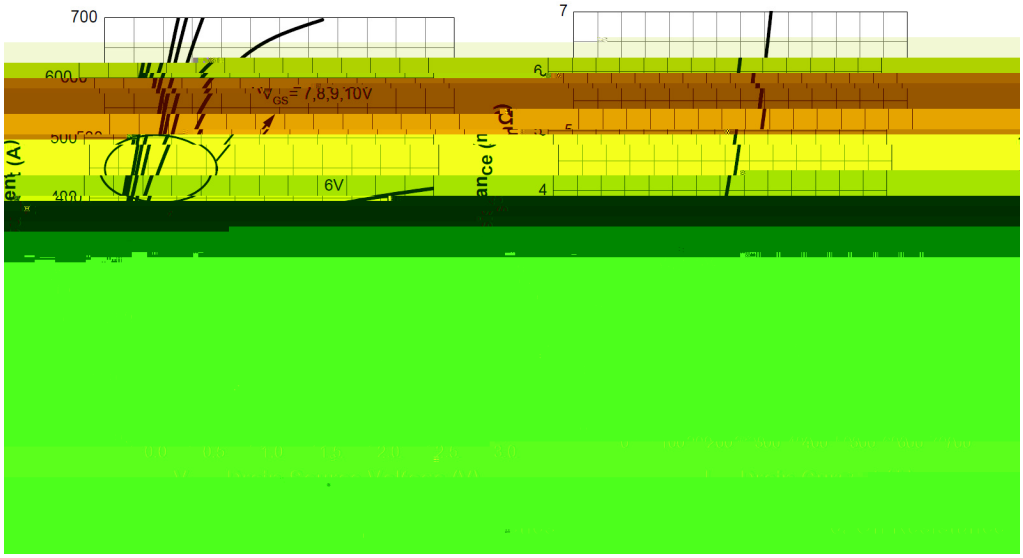

≠ ∃ ÃˊE ∀ ƒ / Electrical Characteristic Curve

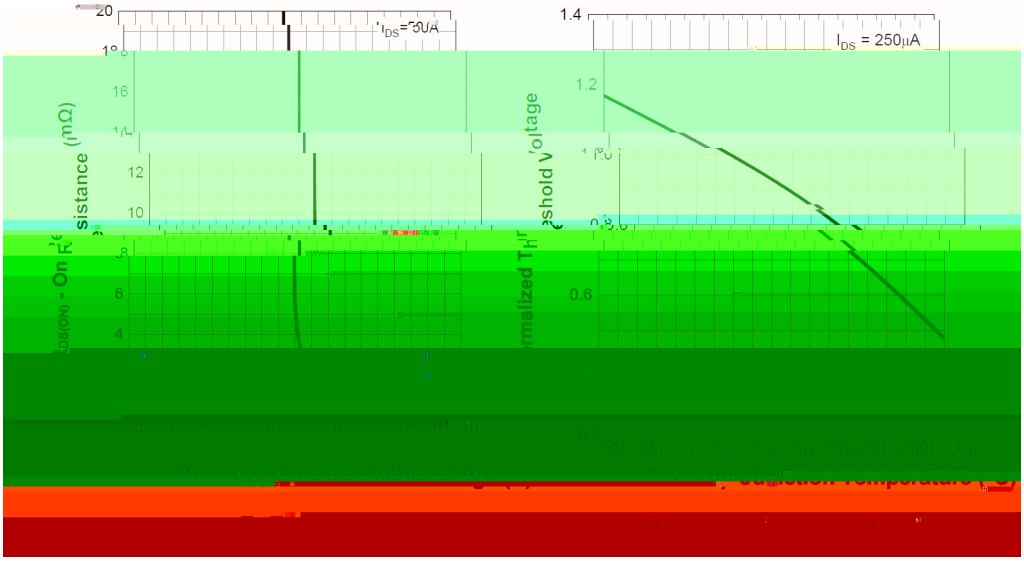


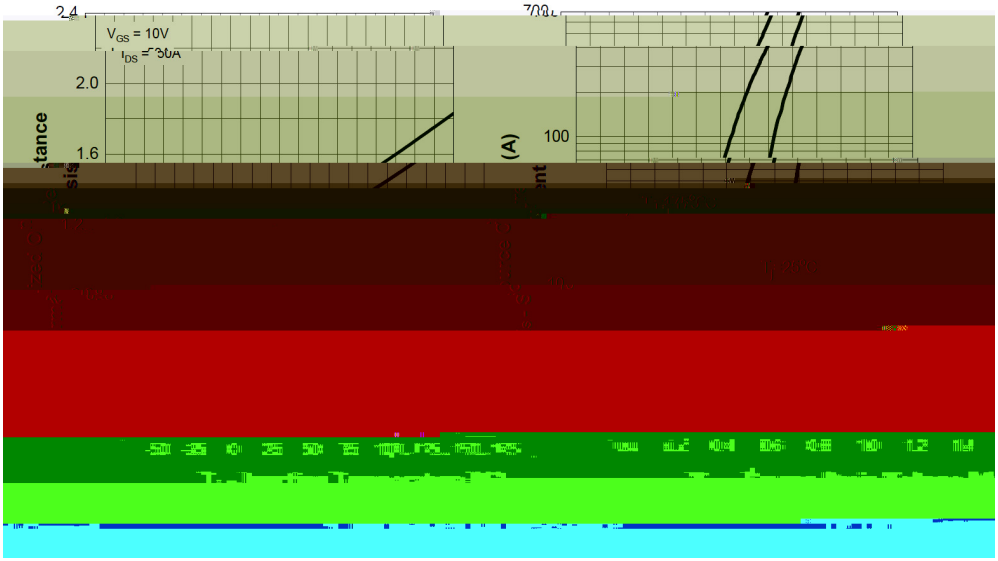

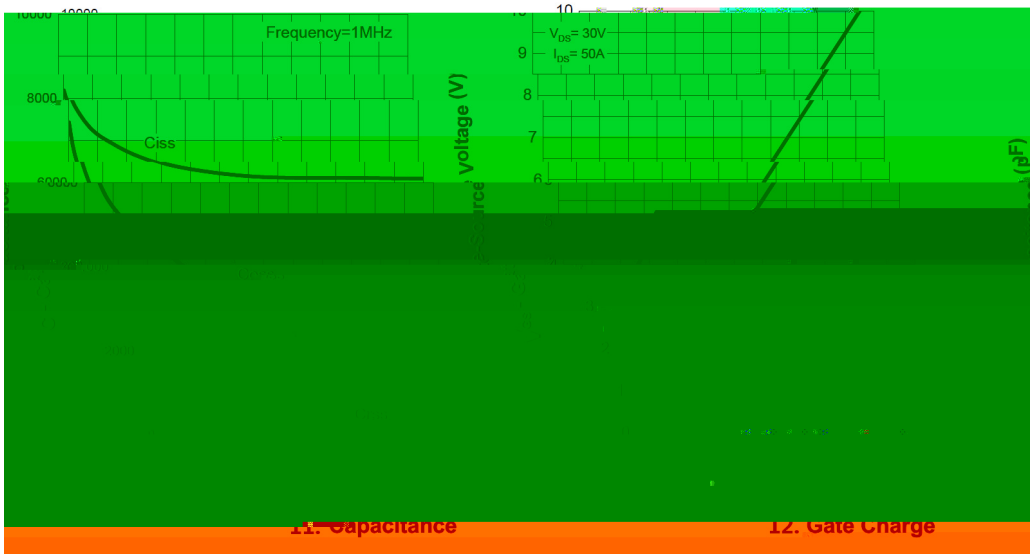

11. Capacitance 12. Gate Charge


ł. Ļ'Ω / Marking Instructions

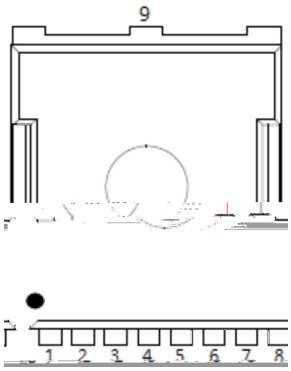

BR

****

ѭ ʃ ╕ ẘ ´E ⅵ ʃ (ᾠ ƹ) / Wh p shudwxuh Suril oh i ru LU Uhi o r z Vr oghulq j +Se0 luhh,

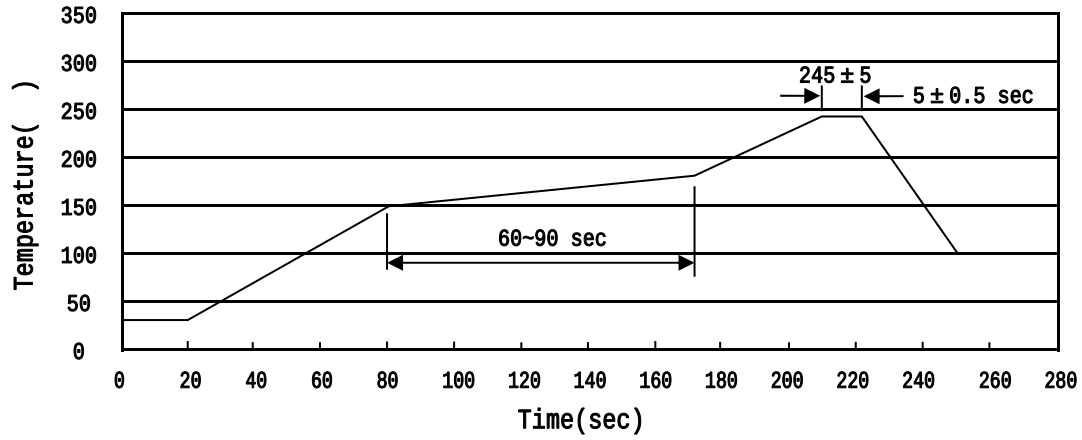

± ± ± ±

ㅓ ü q ¯ `Y Ţ / Resistance to Soldering Heat Test Conditions

± ±

ɒ Ŀ ≮ — / Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

ä ѵ Ļ Ꞙ / Notices