

/ Descriptions


/ Features

$\leq$	Ω	Ω
$\leq$	Ω	Ω


/ Applications

BMS

/ Equivalent Circuit



/ Pinning

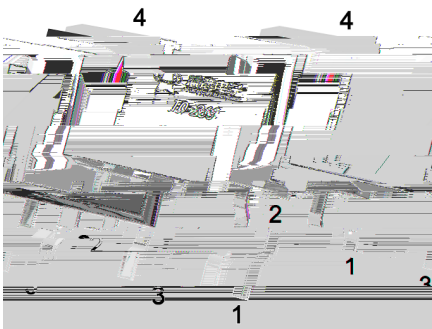

/ Marking

		±	




BRCs055N10SHBD






DATA SHEET

Diagram illustrating a 3x6 grid structure. The grid is divided into a 3x3 subgrid (highlighted in red) and a 3x3 subgrid (highlighted in blue). The symbol Ω is placed below the grid, indicating a region or domain.


/ Electrical Characteristic Curve

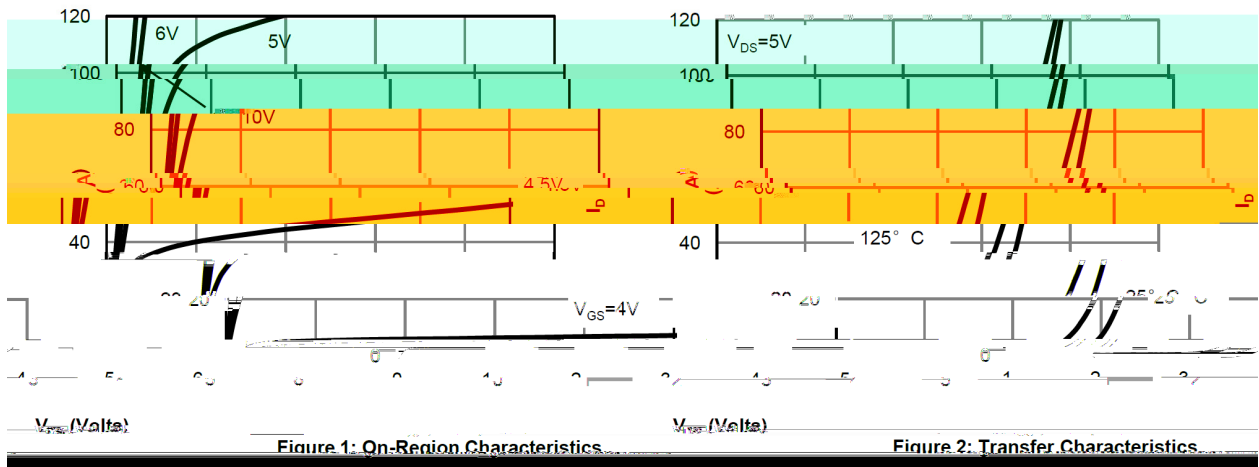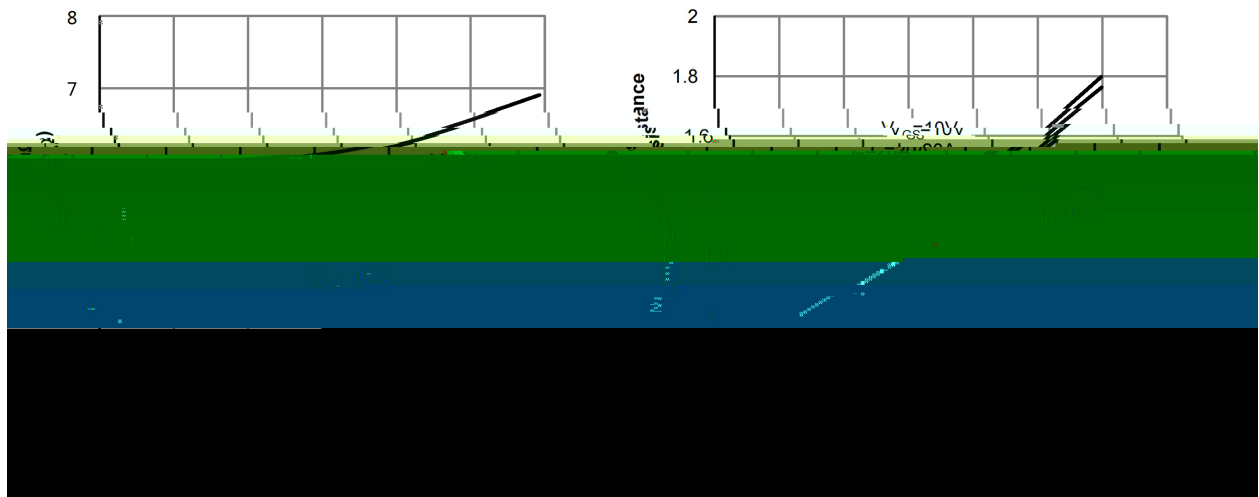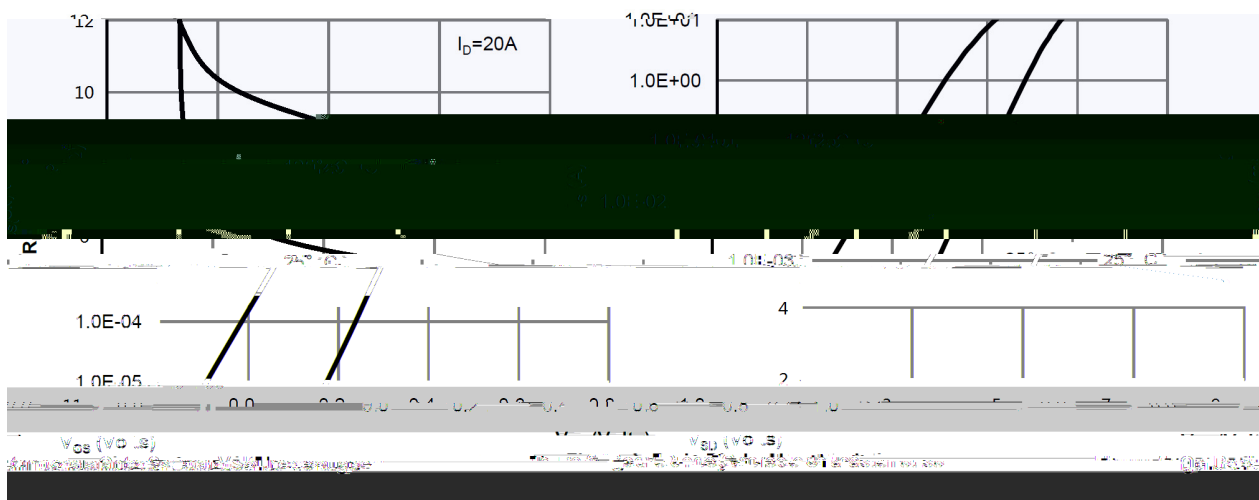

/ Electrical Characteristic Curve

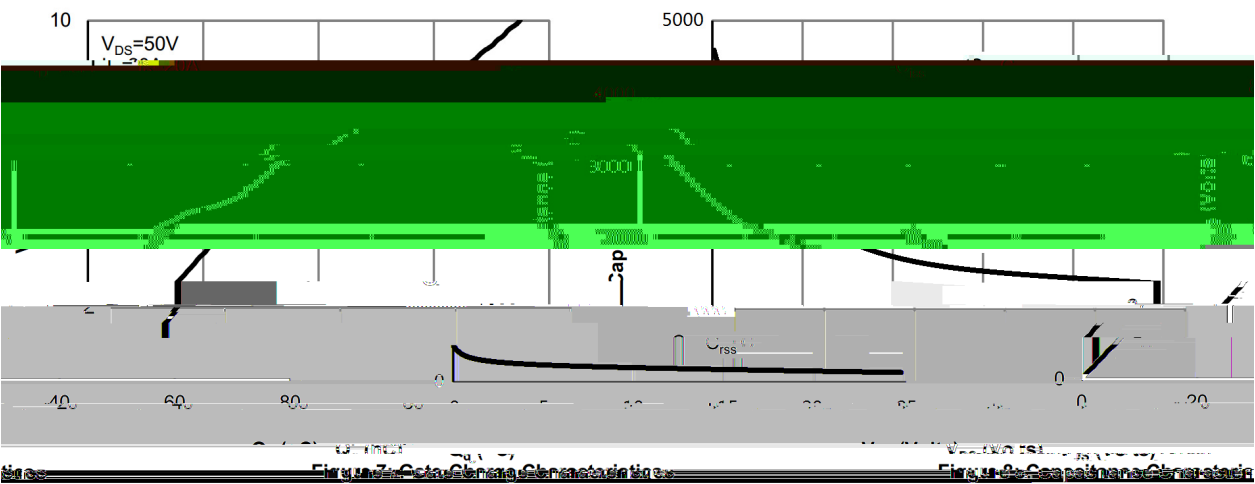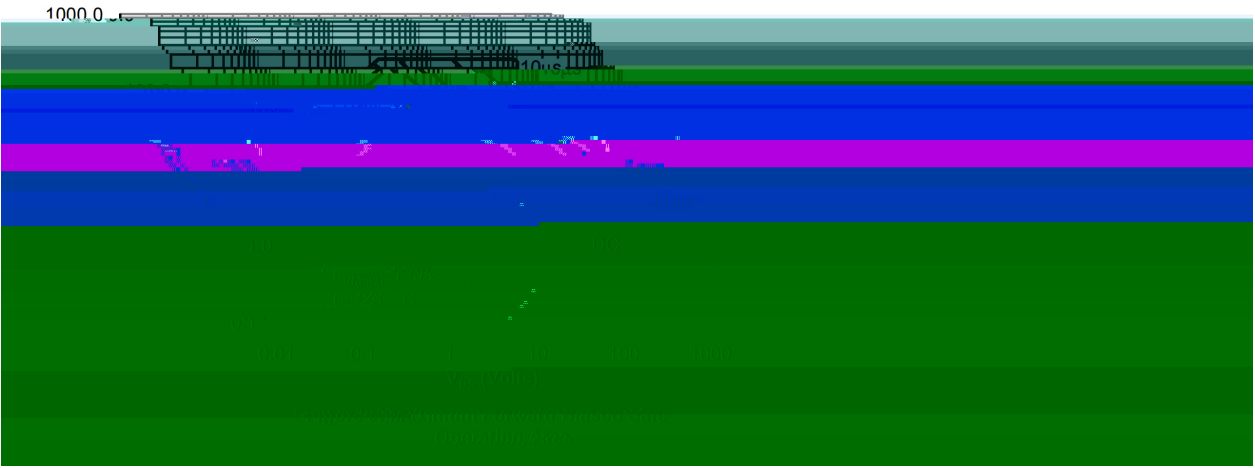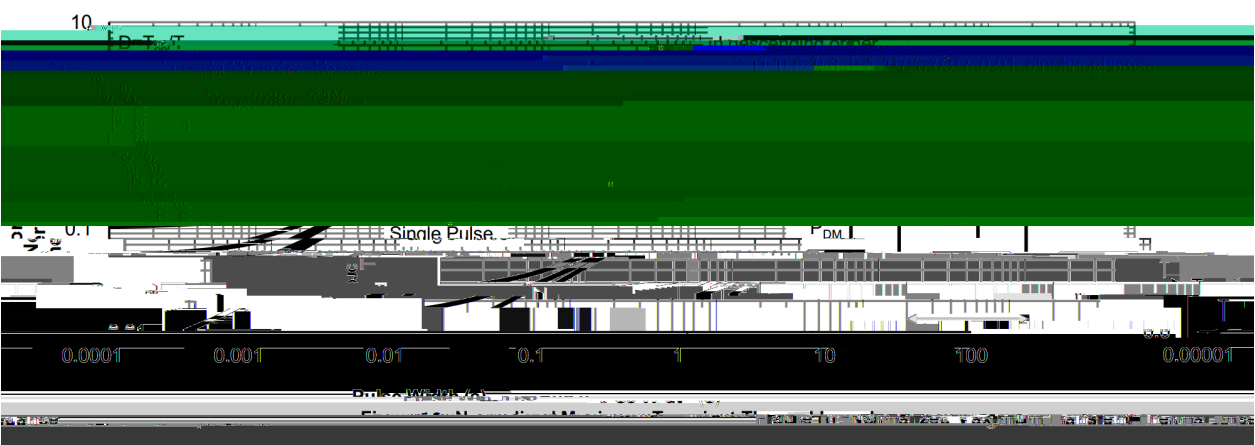


/ Marking Instructions

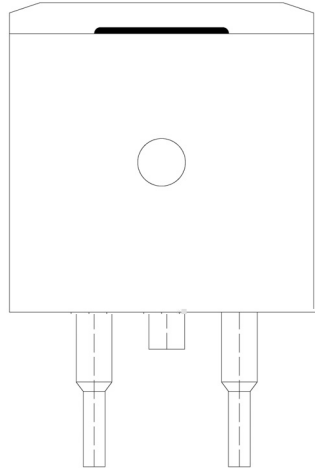

BR

055N10SH

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

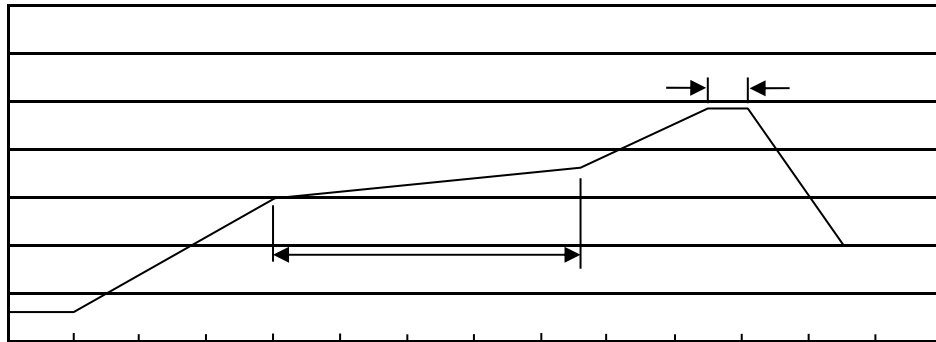 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

						Ж		
	с	т	с		с			

						Ж		
	с		с		с			

/ Notices