Ђ ɑ	ϑ ̈	ɴ ʟ	̈ ɑ
		θ	≥
		θ	

ɻ ɻ ; ╓ ɴ ʟ ̈ ɑ

Ħ ɑ	Ɵ ᶎ ώ	Ɵ ɮ ʒ	Ɵ ú ώ	⊥ ⌡ː ⊤	ʜ N	ὺ ʌ
				Ω		

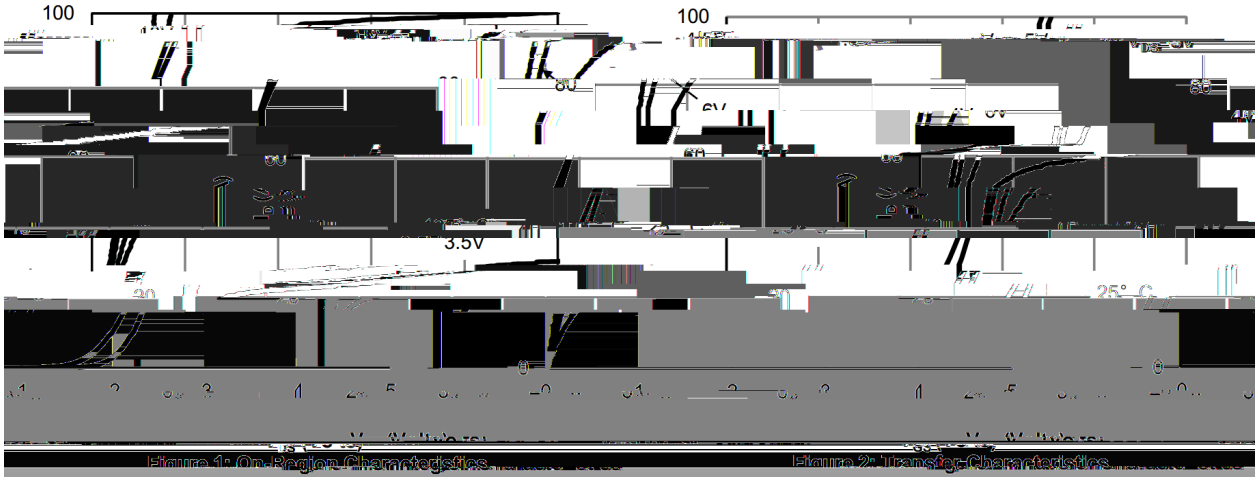

Figure 1: On-Region Characteristics

Figure 2: Transfer Characteristics

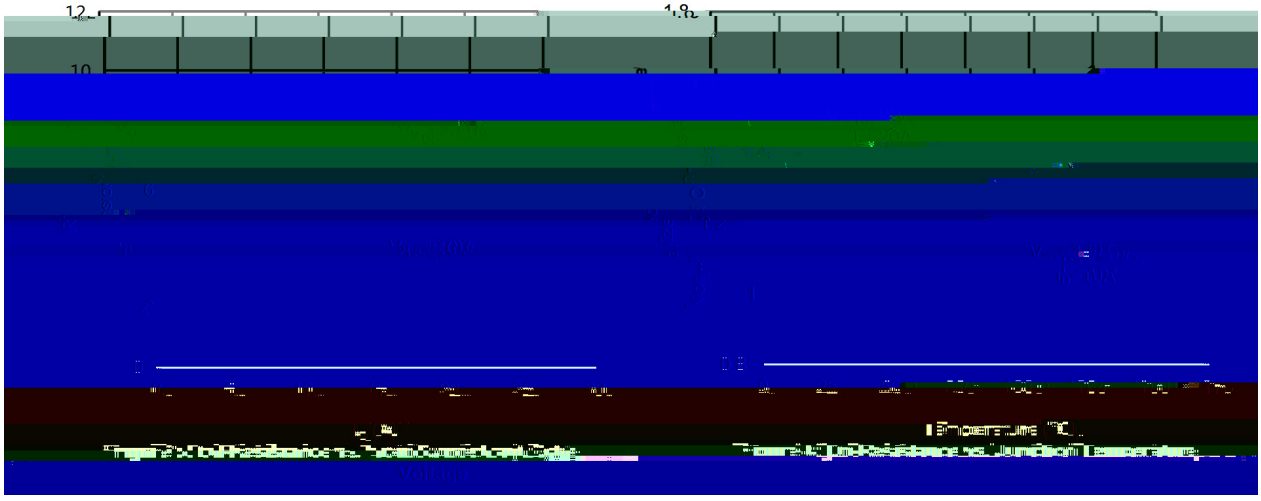

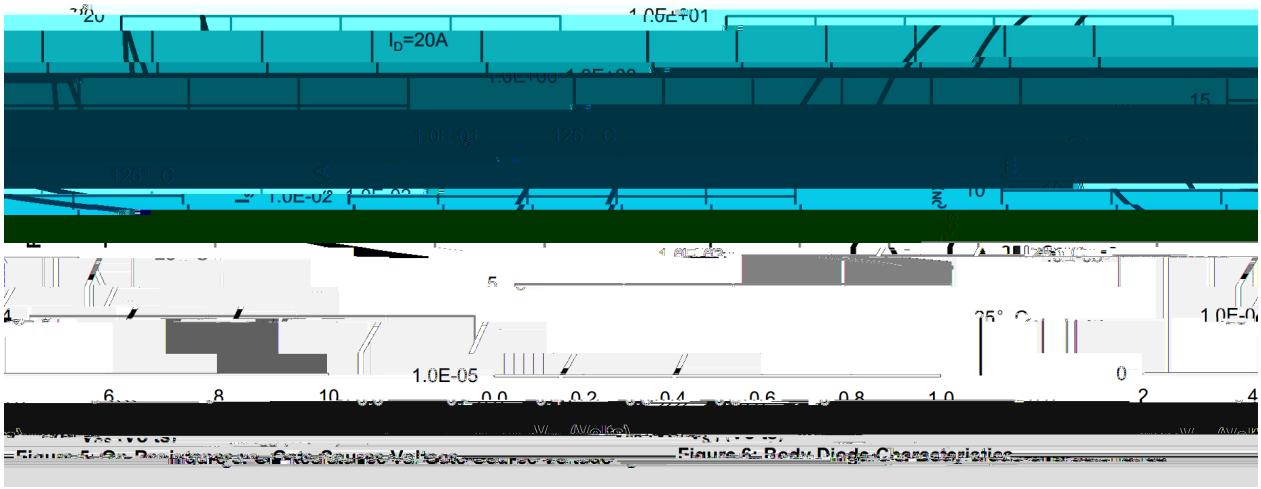

Figure 6: Body Diode Characteristics

PDFN5×6

Unit:mm

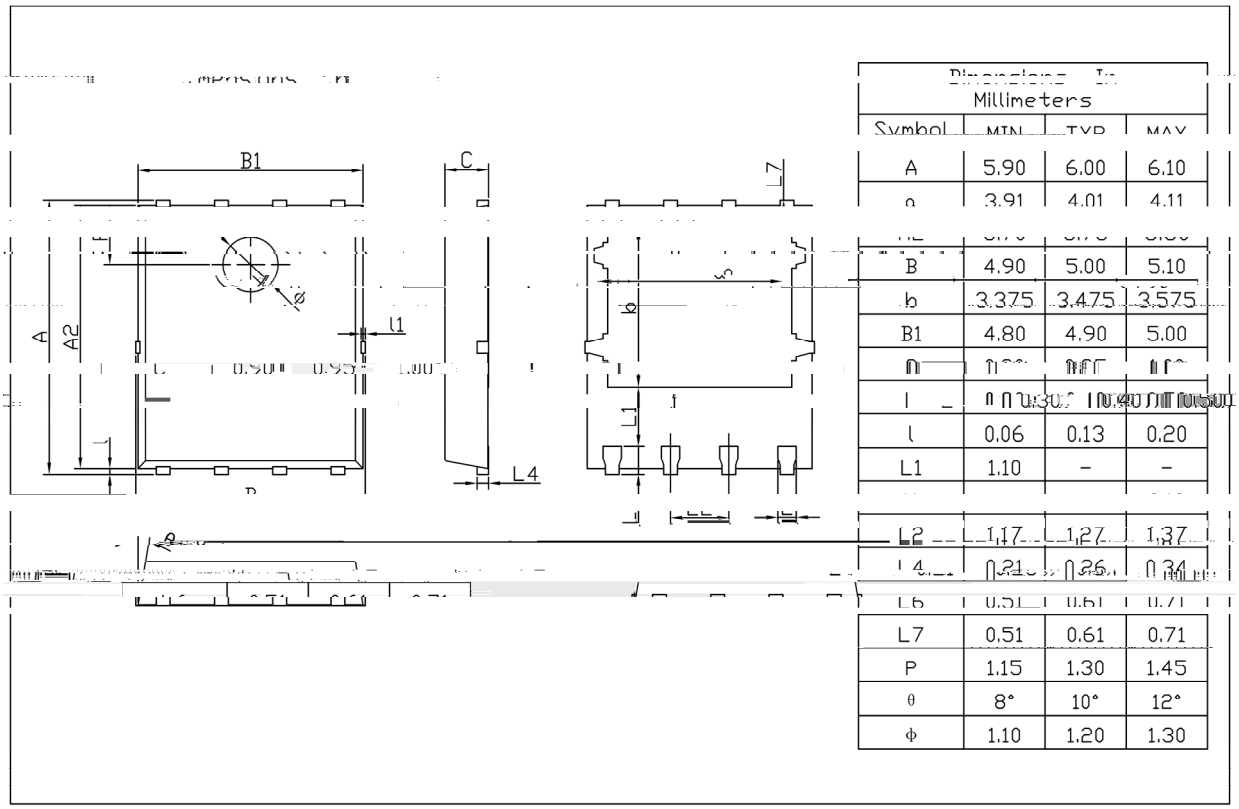

Dimensions In Millimeters			
Symbol	MIN	TYP	MAX
A	5.90	6.00	6.10
[illegible]	3.91	4.01	4.11
[illegible]	[illegible]	[illegible]	[illegible]
B	4.90	5.00	5.10
b	3.375	3.475	3.575
B1	4.80	4.90	5.00
[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]	[illegible]
l	0.06	0.13	0.20
L1	1.10	–	–
[illegible]	[illegible]	[illegible]	[illegible]
L2	1.17	1.27	1.37
[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]	[illegible]
L7	0.51	0.61	0.71
P	1.15	1.30	1.45
θ	8°	10°	12°
Φ	1.10	1.20	1.30

Rev.01 202209

ᵕ ̈ χ

EU χ ѭ ϡ И Ղ

T χ ѭ ∩ ᵓ ṇ ɾ β ‰ ∖ξ

χ ѭ ȝ N Ղ

---- χ ѭ ı ɾ ɾ ή N Ղ ı ɬ ı ɾ ή N Ψ ק

χ

χ

χ

Temperature Profile for IR Reflow Soldering(Pb-Free)

ب ˝ χ

Ĺ ♬ □ ů Ќ ł ı ˙H ژ Ќ ł

Š Ë □ ů ° ł ı ˙H ژ ˙Y ﾊ ﾎ ° ° ł °

ì ˙ ﾘ ¸ ɔ ﻩ ů ﾎ Ќ ł ł

□ ů χ ° ł ˙H ژ χ °

ɔ ` ﾚ Ł