



Rev.B Aug.-2023

TO-252 MOS
 P-CHANNEL MOSFET in a TO-252 Plastic Package.

Low On-Resistance, fast switching, HF Product.




Power Management of Industrial DC/DC Converter.

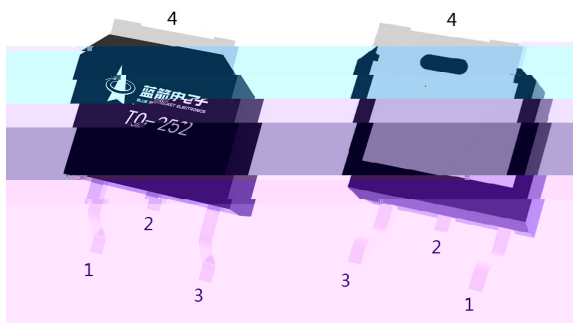



PIN1 G PIN 2 D PIN 3 S PIN 4 D

See Marking Instructions.

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=-10V$ $R_L=0.75\Omega$ $V_{DS}=-15V$ $R_{GEN}=3\Omega$				

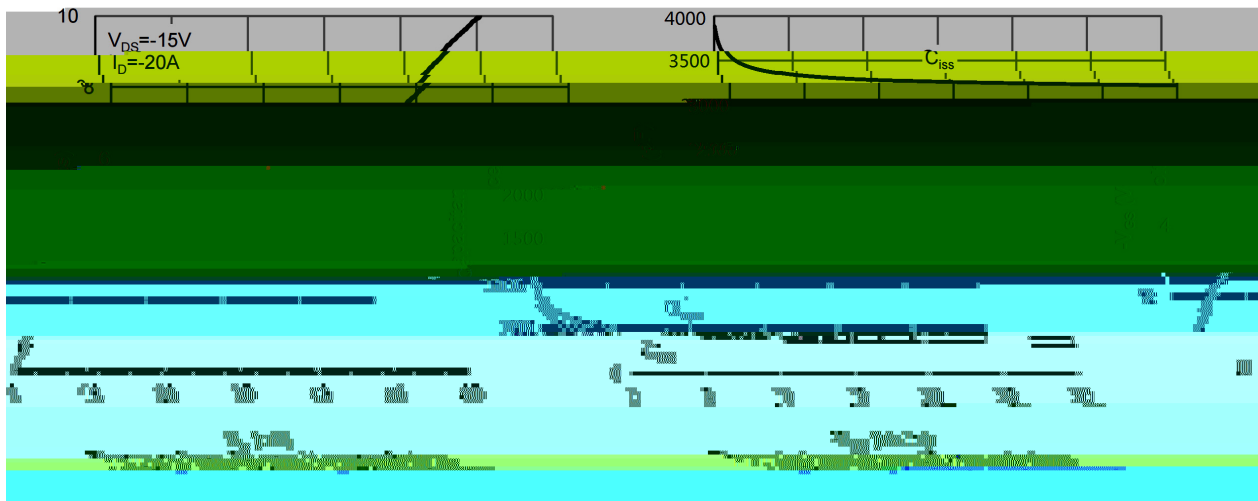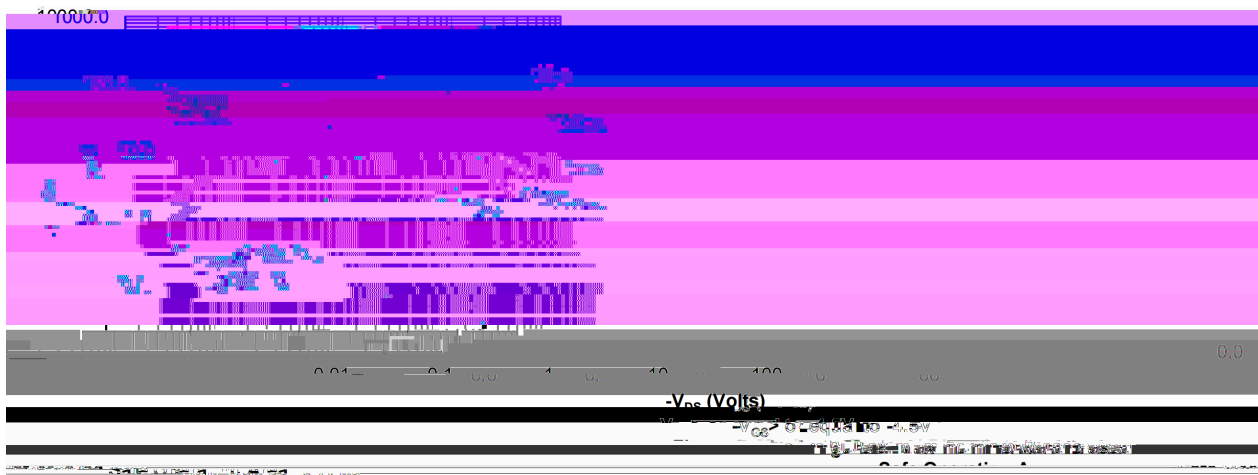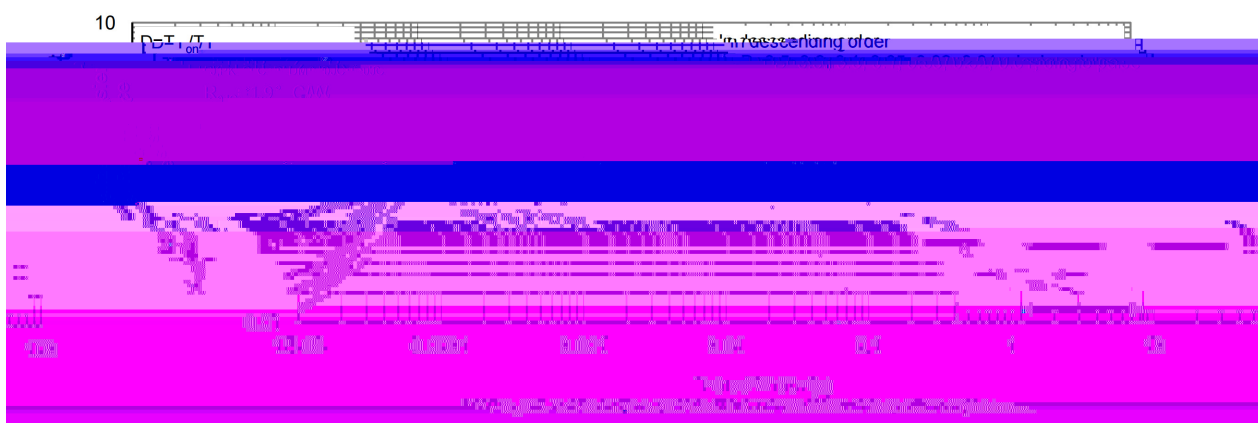

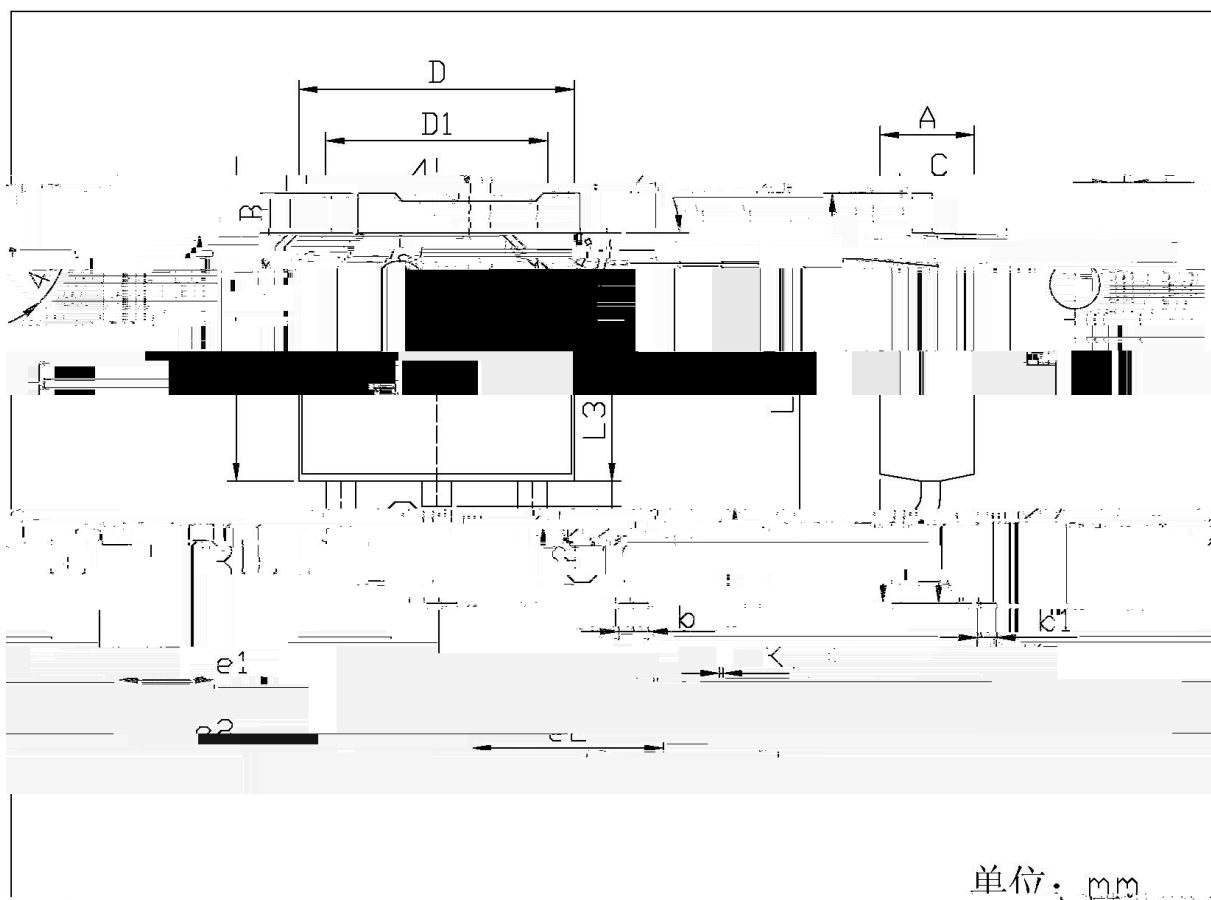

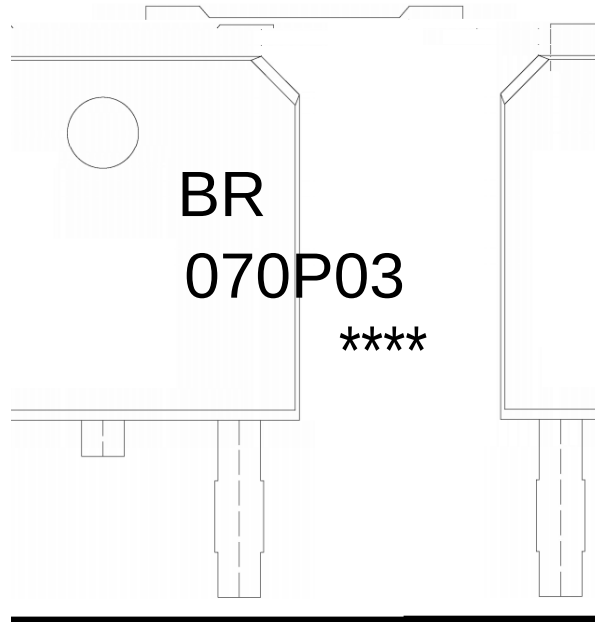

Note:

BR: Company Code

070P03: Product Type

****: Lot No. Code, code change with Lot No

Temperature Profile for IR Reflow Soldering(Pb-Free)
