

/ Descriptions

Ö M M E x ſ j ŧ Z 1

/ Features

Ω
Ω
ñ f β



/ Applications

√ L ɔ Ů ✱ " Å Æ † = ɔ - ě ɔ √ 1 000 ɔ 0 1 ɲ

/ Equivalent Circuit



/ Pinning

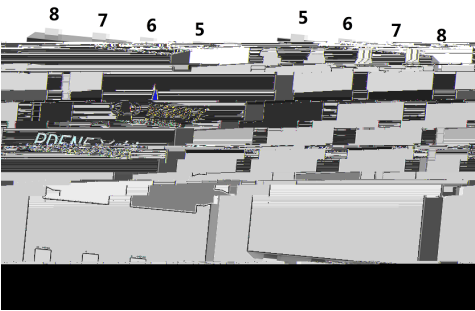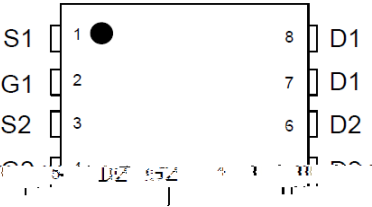

/ Marking

ø M 1 ɔ "




Ƶ Ƨ	Ƨ N	Ƨ Ƨ	D Ƨ

/ Electrical Characteristics(Ta=25)

V_{DD}	I_N	I_{T1} I_{T2}	$\omega_{n\theta}$	$\varepsilon_{z\theta}$	$\omega_{z\theta}$	D _H
		Ω Ω				

BRCS070P03YM


/ Electrical Characteristic Curve

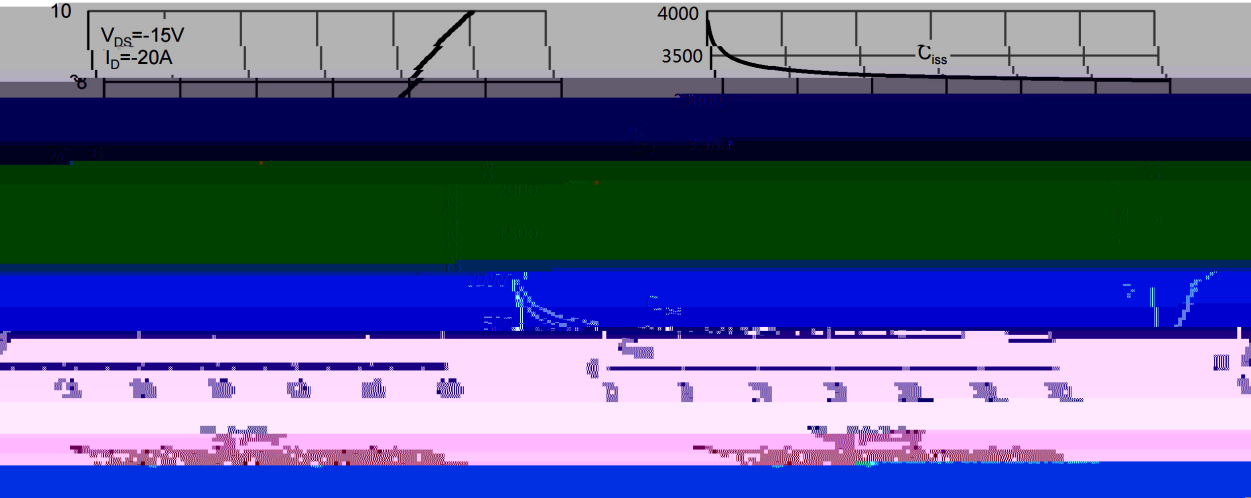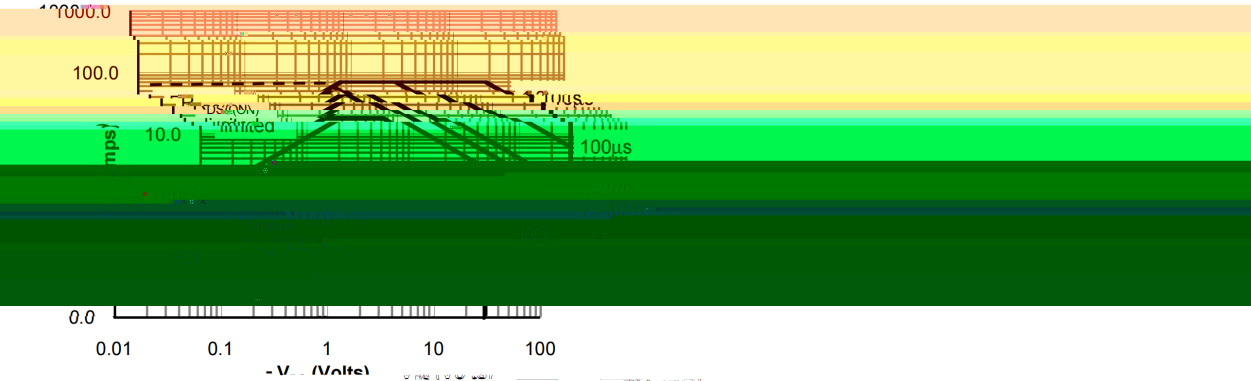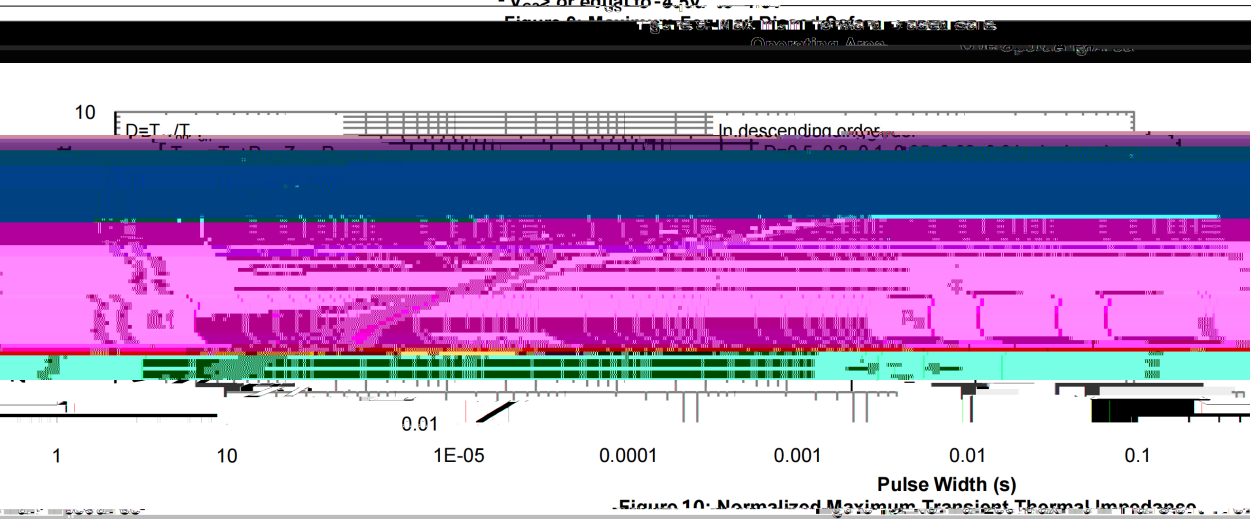


/ Package Dimensions

N5 X6A

Unit:mm

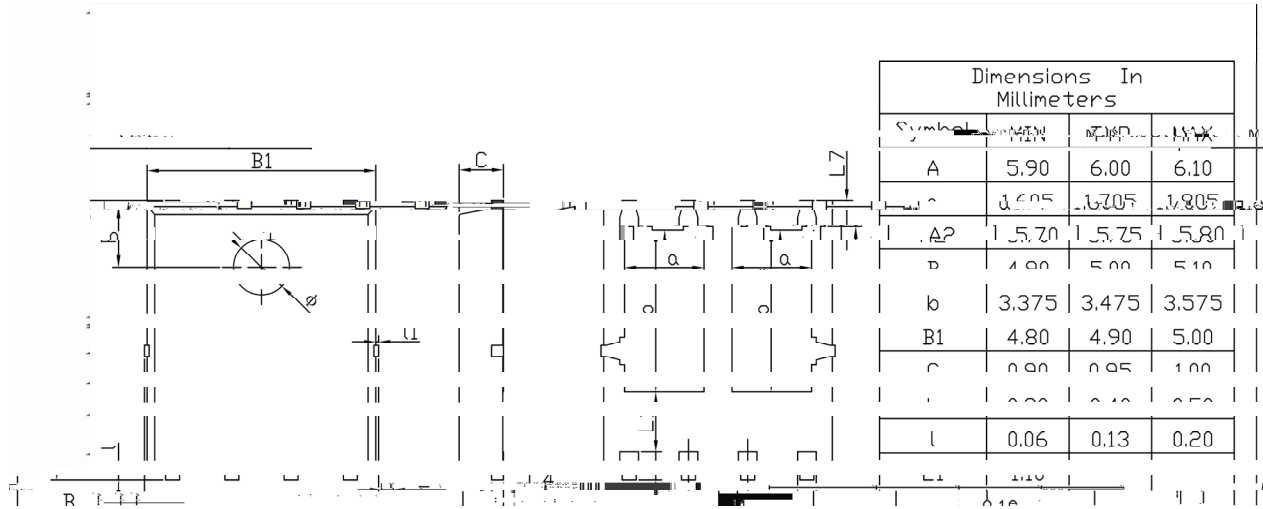


/ Marking Instructions

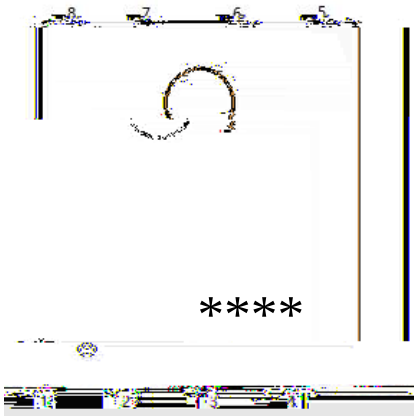

x

$\mathbb{H} \vdash f \checkmark^N \Gamma_D$ $I \vdash f \checkmark^N \Psi_P$

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

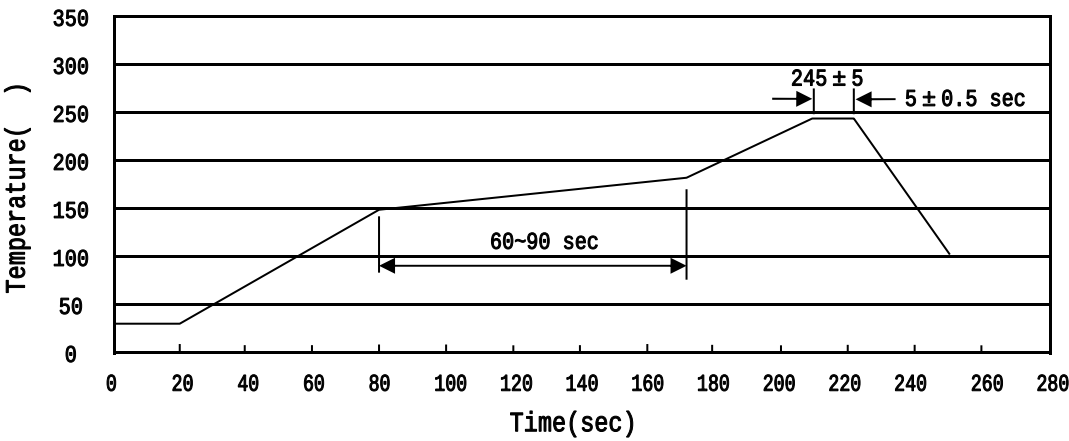

1. 温度曲线

2. 温度曲线

3. 温度曲线

4. 温度曲线

/ Resistance to Soldering Heat Test Conditions

1. 温度曲线

2. 温度曲线

3. 温度曲线

/ Packaging SPEC.

1. 温度曲线

M E é Ä								
	Units/Reel E 2 0`	Reels/Inner Box 0` 2`	Units/Inner Box E 2`	Inner Boxes/Outer Box ` 2 1	Units/Outer Box E 2 1	Reel	Inner Box ``	Outer Box 1

/ Notices