

BRCS100N06BD

/ Absolute Maximum Ratings(Ta=25)







	θ		
	θ		

/ Electrical Characteristics(Ta=25)




						Ω

BRCS100N06BD


Electrical Characteristic Curve

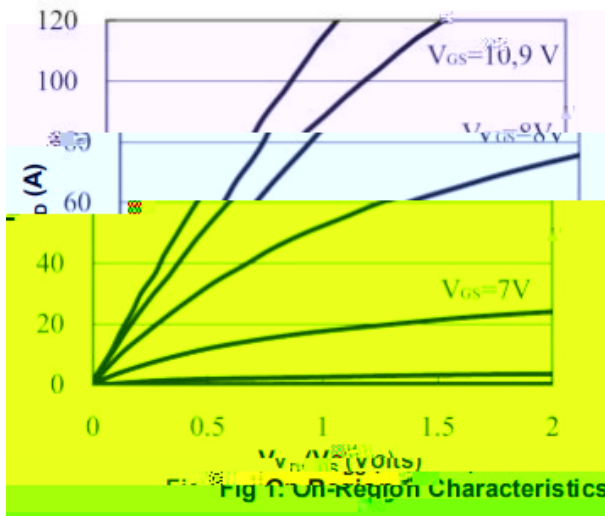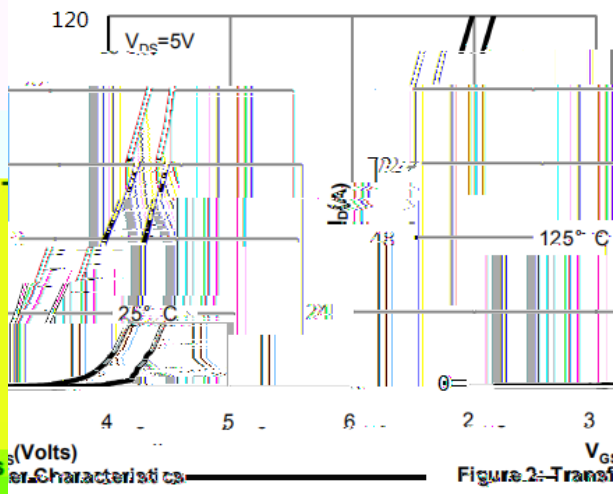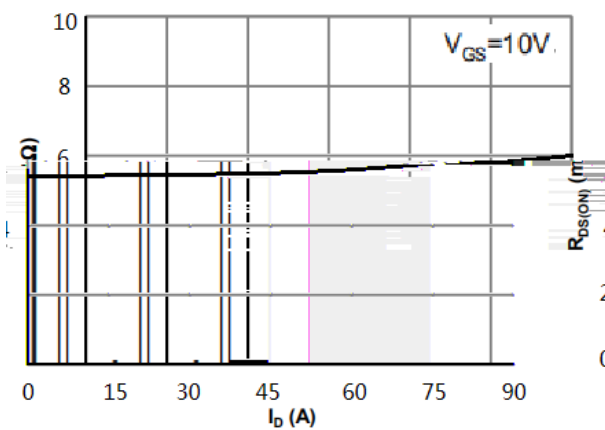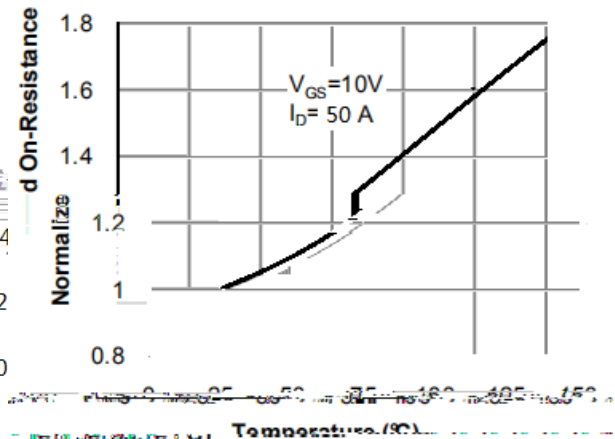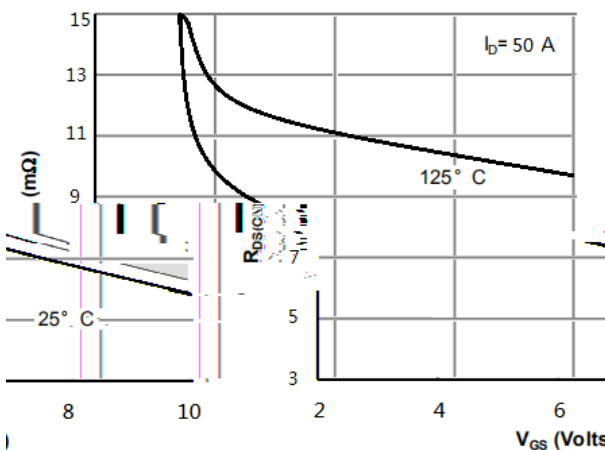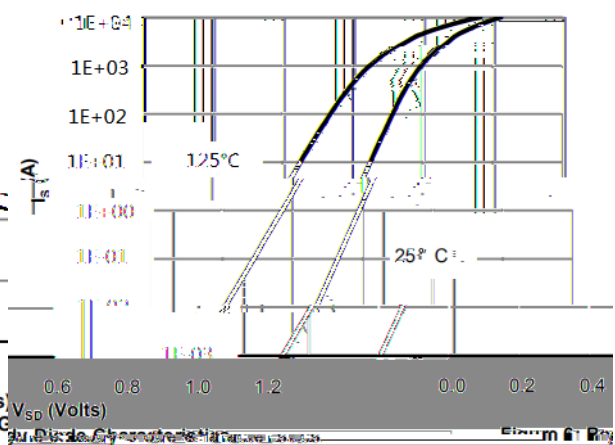


/ Electrical Characteristic Curve

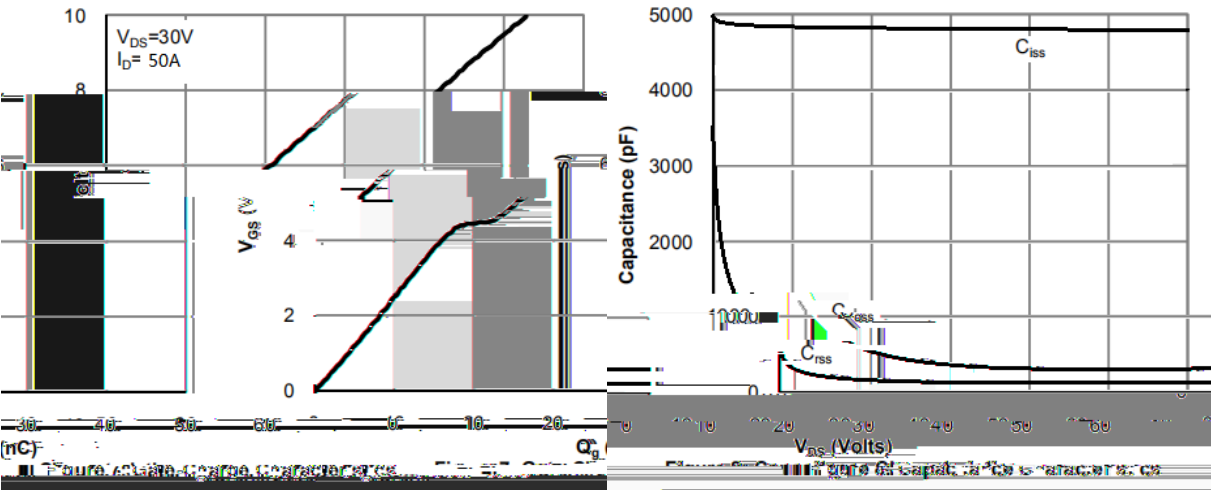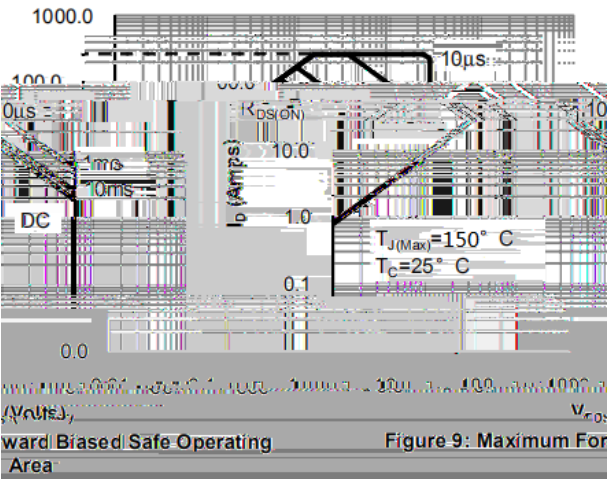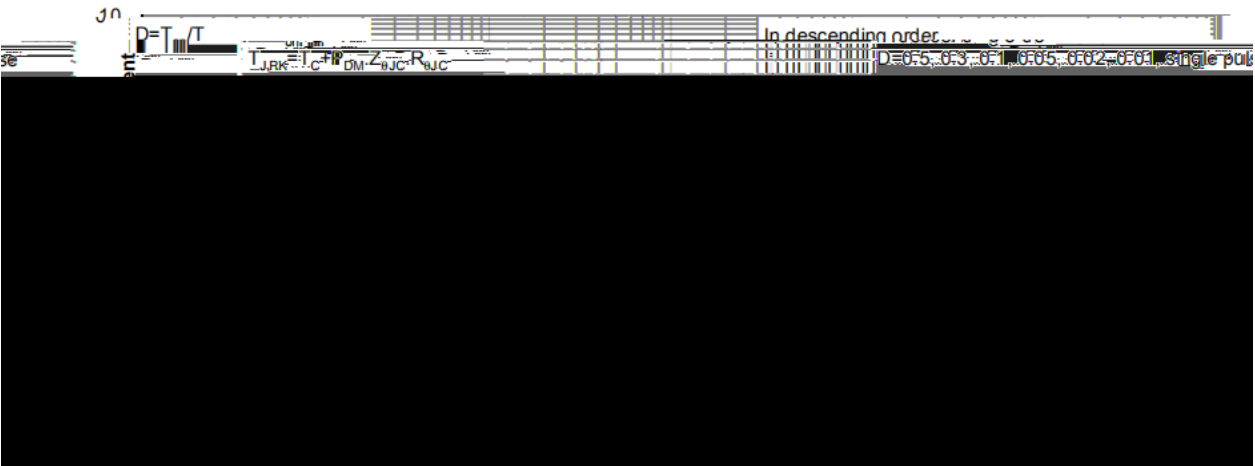

/ Package Dimensions

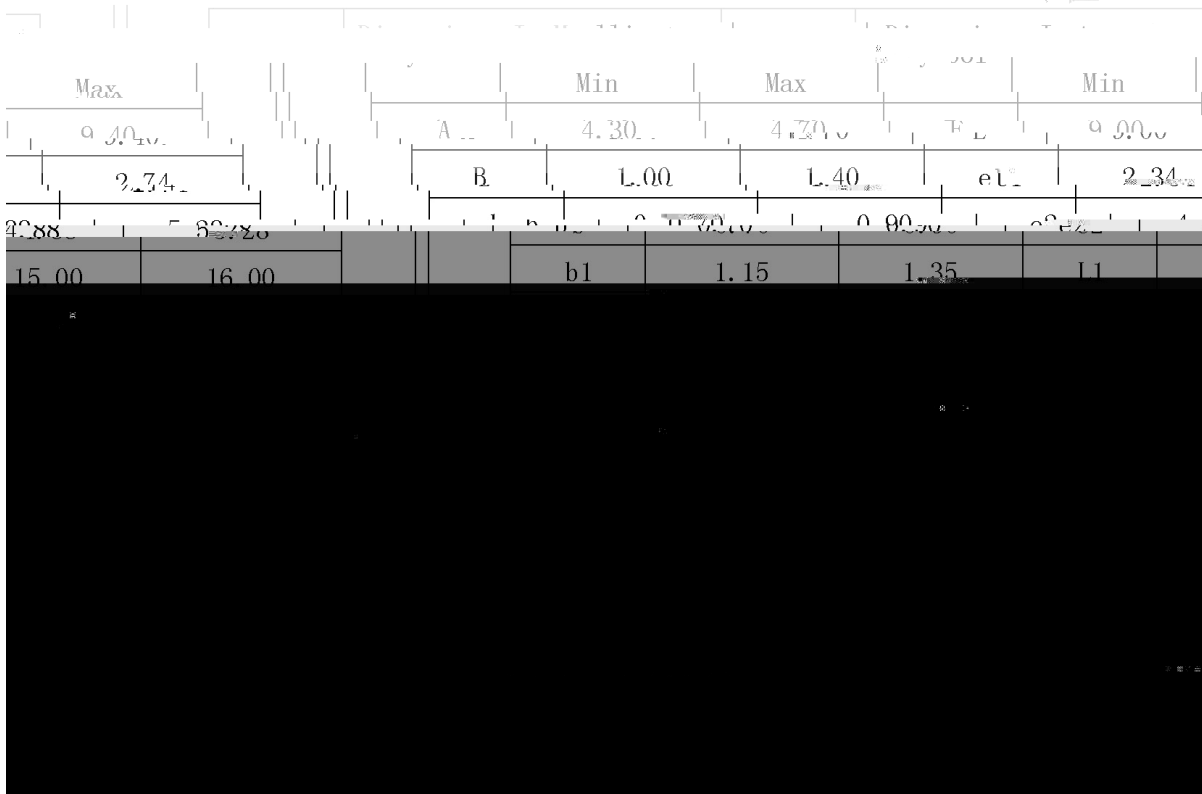


/ Marking Instructions

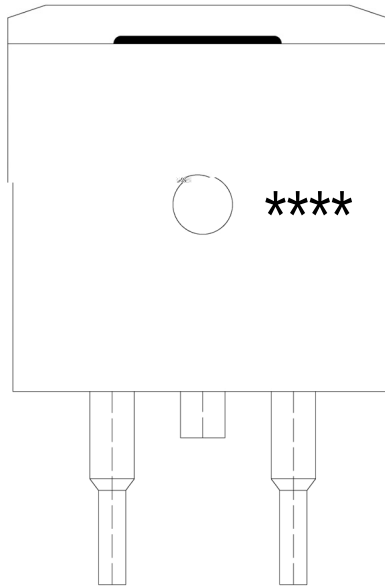

100N06

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

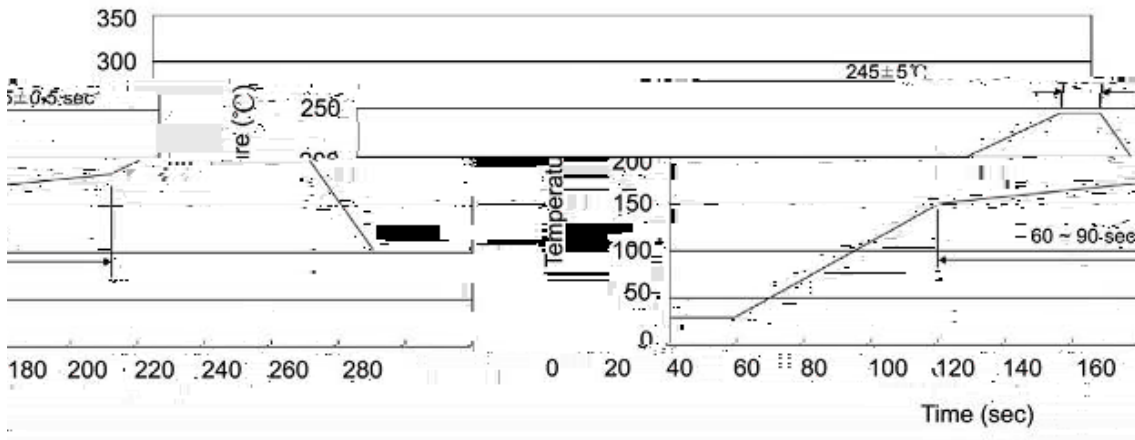

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

g m ô h				g m d Ê	
β m ù ´	Unit Reel / / i	Reel / i / ç	Unit / ç		!