




/ Absolute Maximum Ratings(Ta=25)

		±	




/ Electrical Characteristics(Ta=25)

					±	


/ Electrical Characteristic Curve

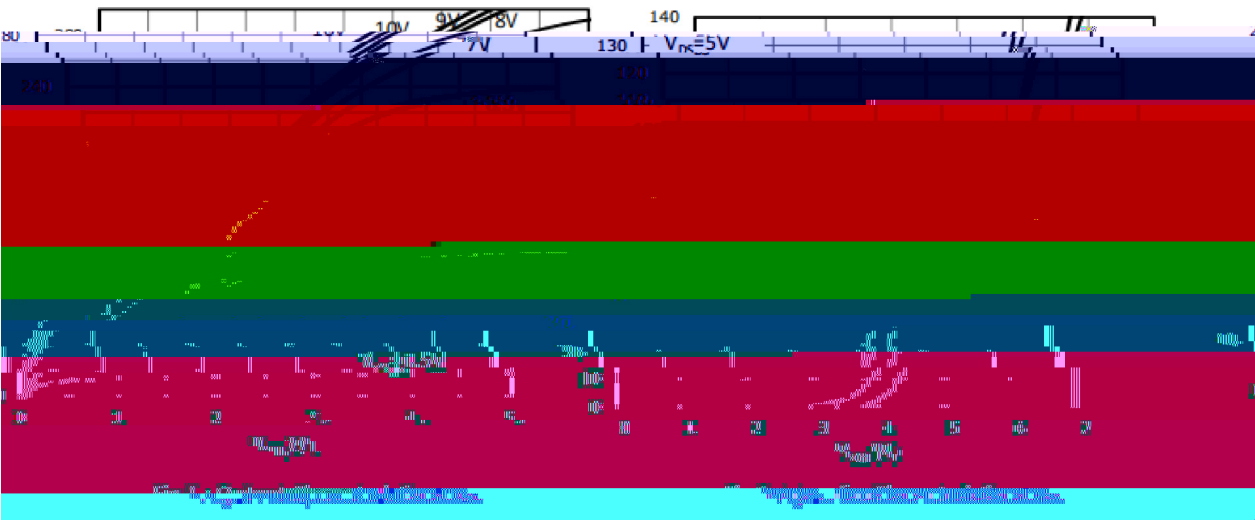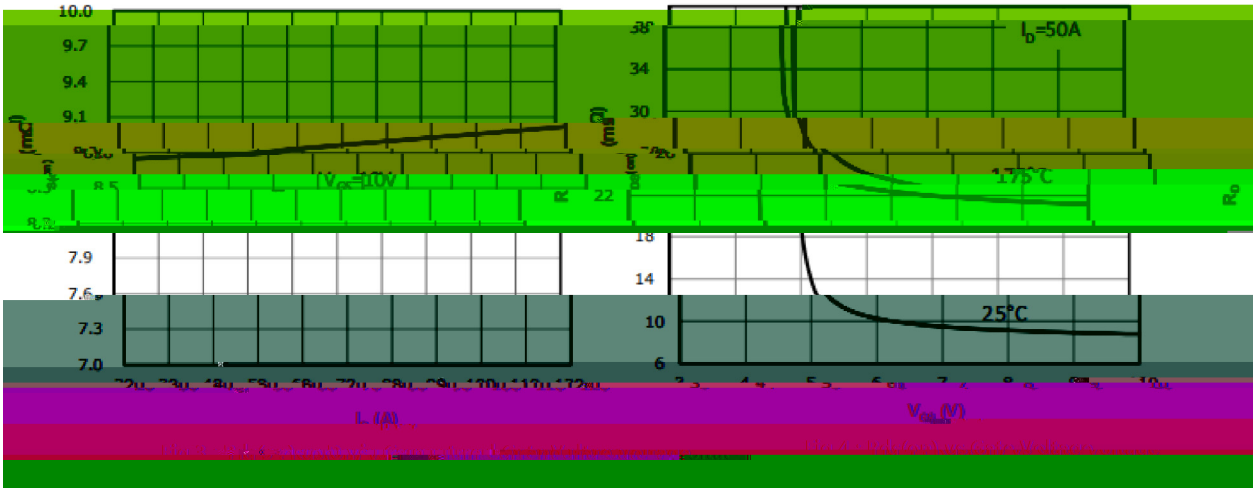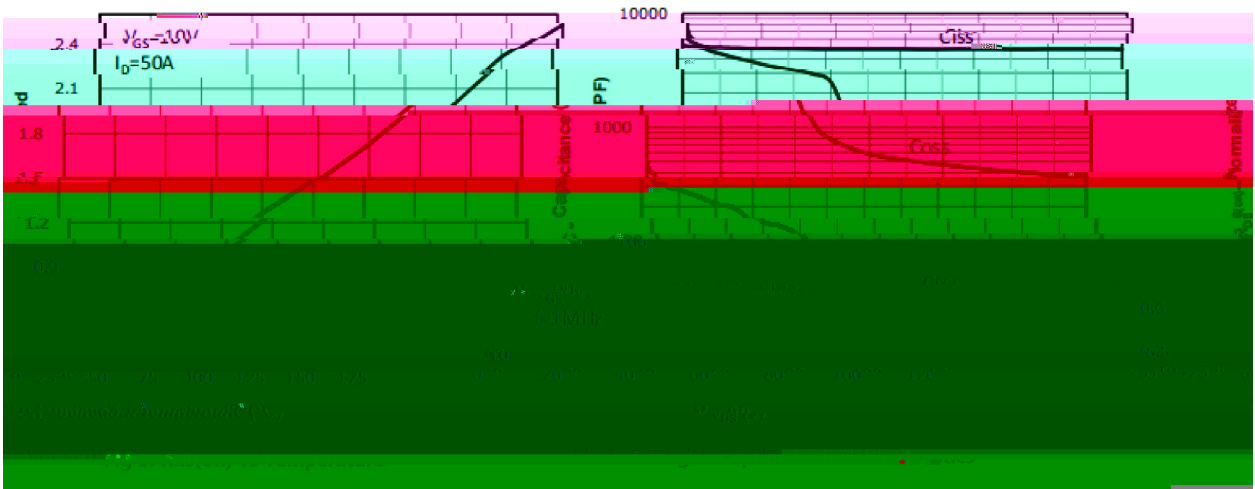


/ Electrical Characteristic Curve

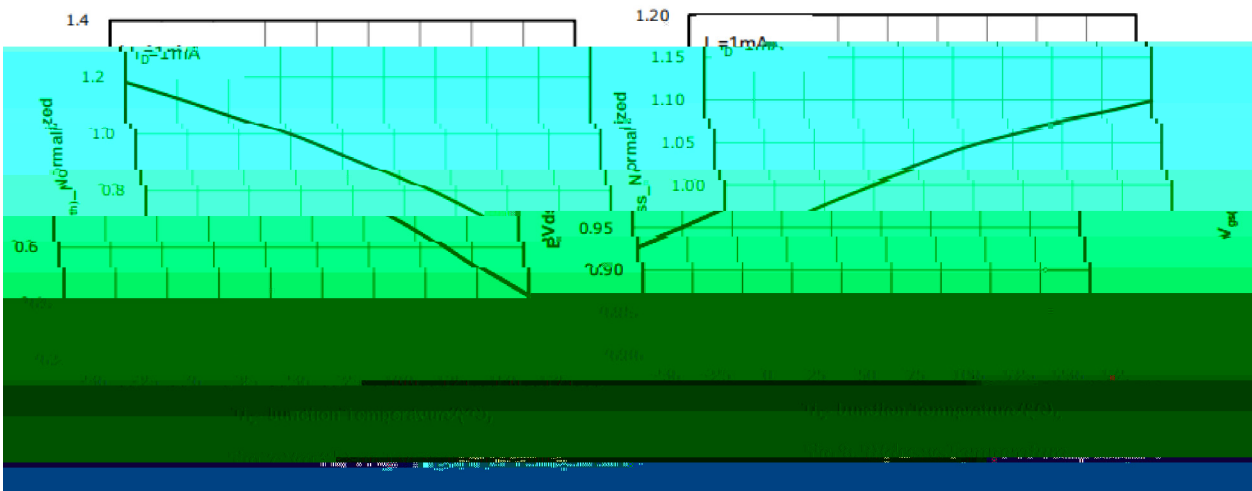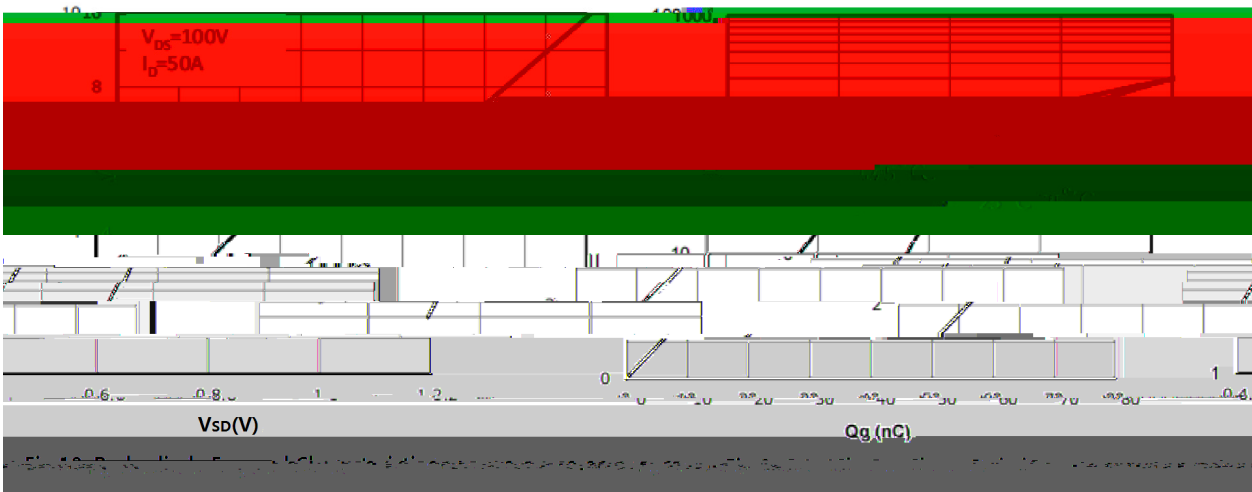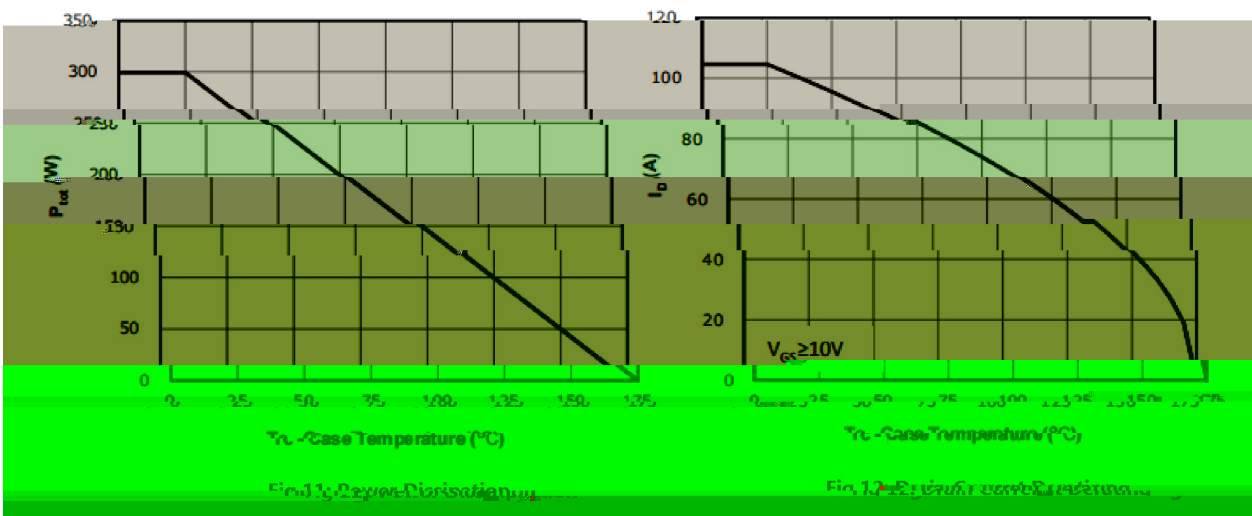

/ Electrical Characteristic Curve

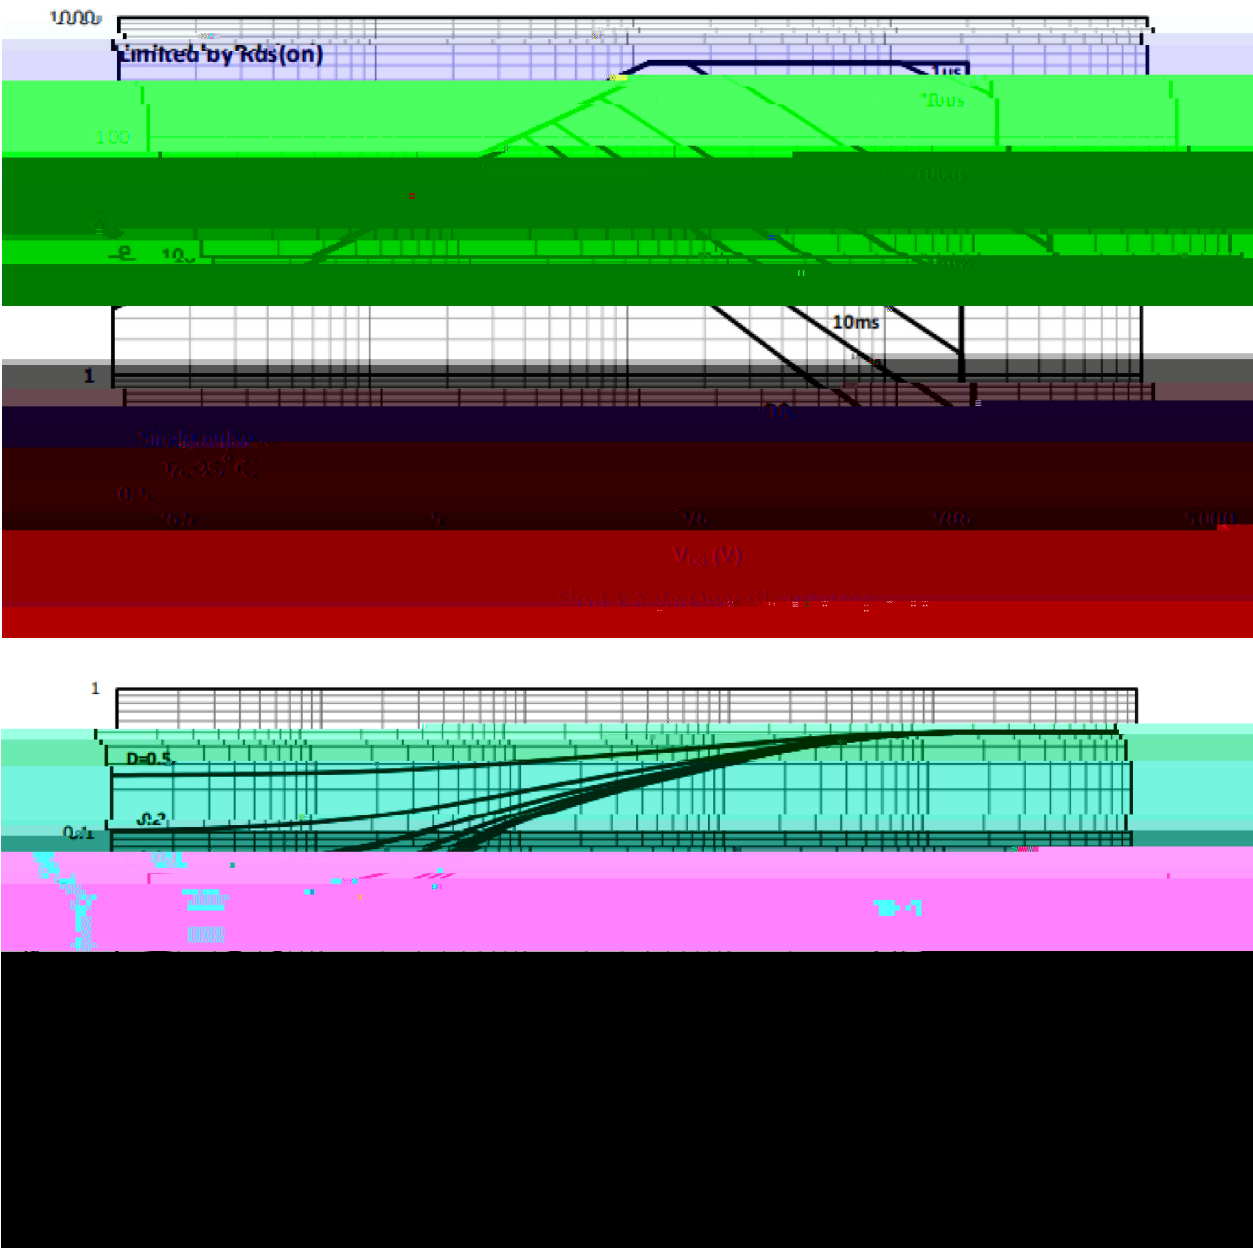


/ Package Dimensions

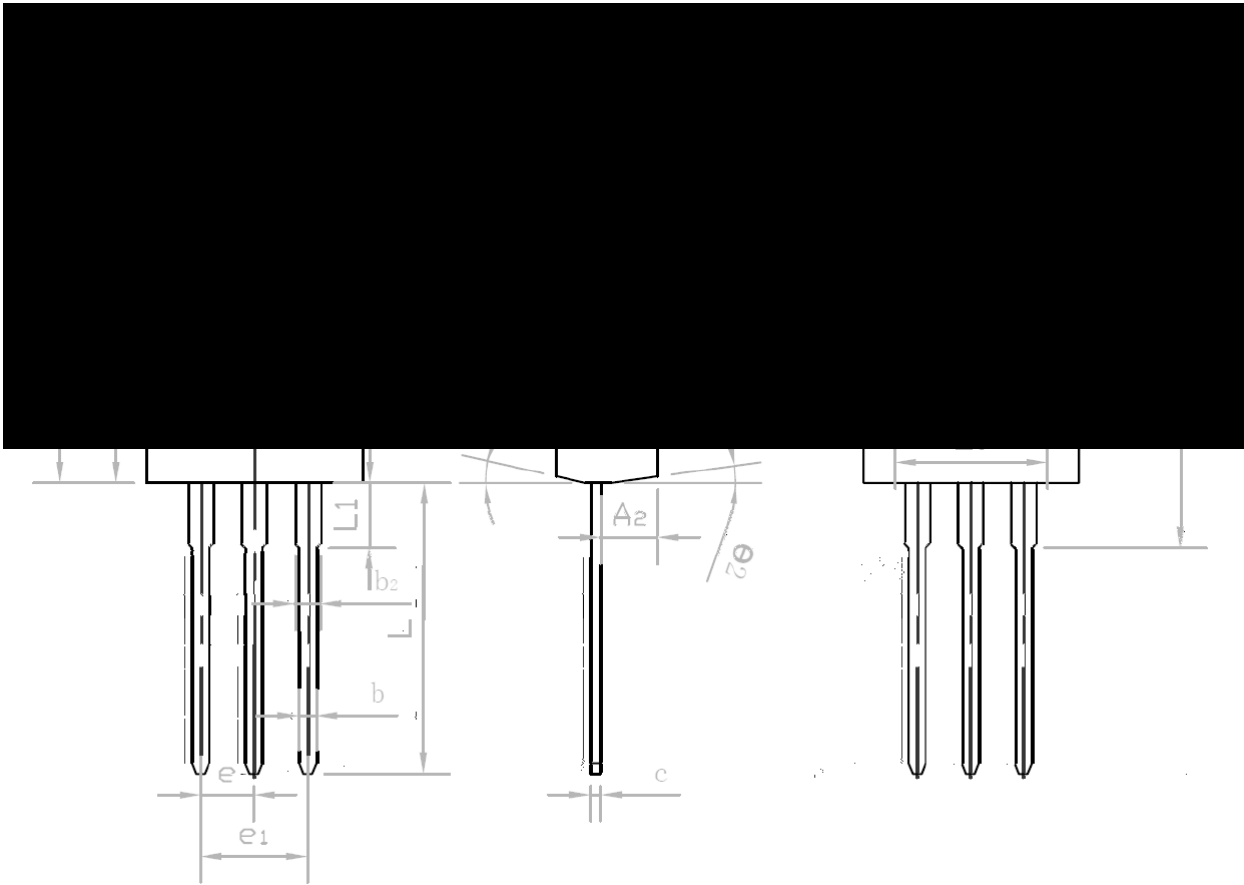

Symbol	Dimensions In Millimeters		
	Min	Typ	Max
A	4.27	4.57	4.87
A1	1.15	1.30	1.45
A2	2.10	2.40	2.70
b	0.70	0.80	1.00
b2	1.17	1.27	1.50
c	0.40	0.50	0.65
D	15.10	15.60	16.10
D1	8.80	9.10	9.40
D2	5.70	6.70	7.00
E	9.70	10.00	10.30
E1	-	8.70	-
E2	9.62	10.00	10.30
L	12.40	12.70	13.00
L1	-	12.70	13.00
L2	12.40	12.70	13.00
L3	12.40	12.70	13.00
L4	12.40	12.70	13.00
L5	12.40	12.70	13.00
L6	12.40	12.70	13.00
L7	12.40	12.70	13.00
L8	12.40	12.70	13.00
L9	12.40	12.70	13.00
L10	12.40	12.70	13.00
L11	12.40	12.70	13.00
L12	12.40	12.70	13.00
L13	12.40	12.70	13.00
L14	12.40	12.70	13.00
L15	12.40	12.70	13.00
L16	12.40	12.70	13.00
L17	12.40	12.70	13.00
L18	12.40	12.70	13.00
L19	12.40	12.70	13.00
L20	12.40	12.70	13.00
L21	12.40	12.70	13.00
L22	12.40	12.70	13.00
L23	12.40	12.70	13.00
L24	12.40	12.70	13.00
L25	12.40	12.70	13.00
L26	12.40	12.70	13.00
L27	12.40	12.70	13.00
L28	12.40	12.70	13.00
L29	12.40	12.70	13.00
L30	12.40	12.70	13.00
L31	12.40	12.70	13.00
L32	12.40	12.70	13.00
L33	12.40	12.70	13.00
L34	12.40	12.70	13.00
L35	12.40	12.70	13.00
L36	12.40	12.70	13.00
L37	12.40	12.70	13.00
L38	12.40	12.70	13.00
L39	12.40	12.70	13.00
L40	12.40	12.70	13.00
L41	12.40	12.70	13.00
L42	12.40	12.70	13.00
L43	12.40	12.70	13.00
L44	12.40	12.70	13.00
L45	12.40	12.70	13.00
L46	12.40	12.70	13.00
L47	12.40	12.70	13.00
L48	12.40	12.70	13.00
L49	12.40	12.70	13.00
L50	12.40	12.70	13.00
L51	12.40	12.70	13.00
L52	12.40	12.70	13.00
L53	12.40	12.70	13.00
L54	12.40	12.70	13.00
L55	12.40	12.70	13.00
L56	12.40	12.70	13.00
L57	12.40	12.70	13.00
L58	12.40	12.70	13.00
L59	12.40	12.70	13.00
L60	12.40	12.70	13.00
L61	12.40	12.70	13.00
L62	12.40	12.70	13.00
L63	12.40	12.70	13.00
L64	12.40	12.70	13.00
L65	12.40	12.70	13.00
L66	12.40	12.70	13.00
L67	12.40	12.70	13.00
L68	12.40	12.70	13.00
L69	12.40	12.70	13.00
L70	12.40	12.70	13.00
L71	12.40	12.70	13.00
L72	12.40	12.70	13.00
L73	12.40	12.70	13.00
L74	12.40	12.70	13.00
L75	12.40	12.70	13.00
L76	12.40	12.70	13.00
L77	12.40	12.70	13.00
L78	12.40	12.70	13.00
L79	12.40	12.70	13.00
L80	12.40	12.70	13.00
L81	12.40	12.70	13.00
L82	12.40	12.70	13.00
L83	12.40	12.70	13.00
L84	12.40	12.70	13.00
L85	12.40	12.70	13.00
L86	12.40	12.70	13.00
L87	12.40	12.70	13.00
L88	12.40	12.70	13.00
L89	12.40	12.70	13.00
L90	12.40	12.70	13.00
L91	12.40	12.70	13.00
L92	12.40	12.70	13.00
L93	12.40	12.70	13.00
L94	12.40	12.70	13.00
L95	12.40	12.70	13.00
L96	12.40	12.70	13.00
L97	12.40	12.70	13.00
L98	12.40	12.70	13.00
L99	12.40	12.70	13.00
L100	12.40	12.70	13.00

/ Marking Instructions

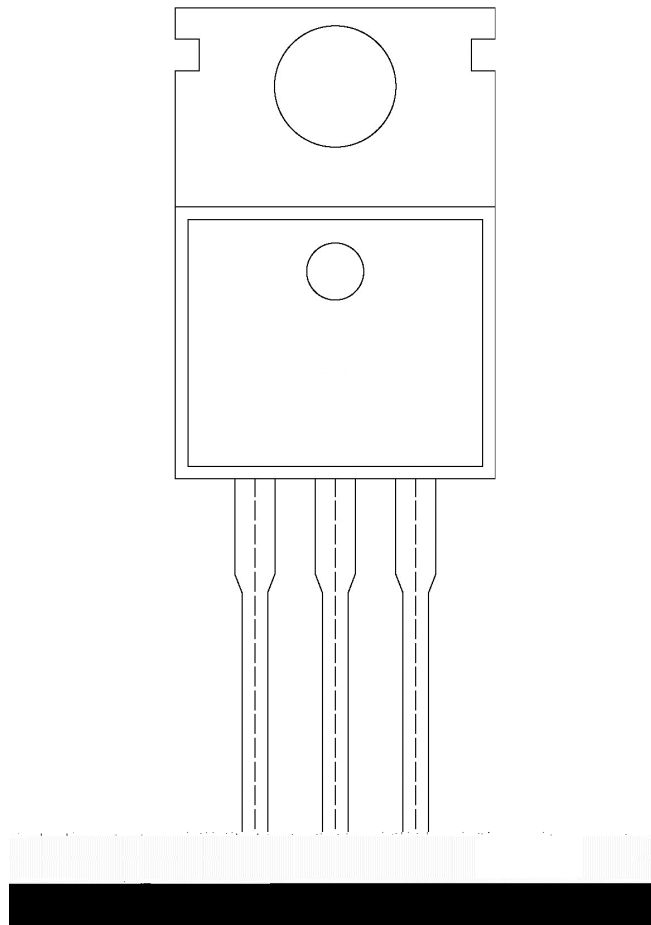

BR

100N20SH

 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices