

/ Descriptions

PDFN3×3A-8L N MOS

x



/ Features

±

≤

/ Applications

DC/DC

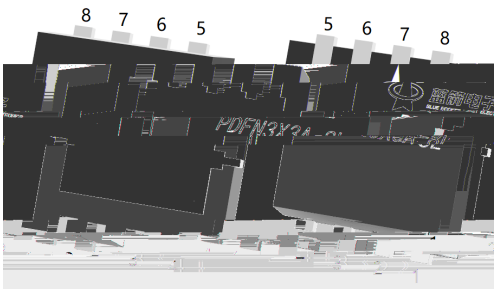




/ Marking

2 8




/ Electrical Characteristics(Ta=25)

		μ				
						μ
						μ
		μ				
						Ω
						Ω
						Ω
		Ω Ω				

/ Electrical Characteristic Curve

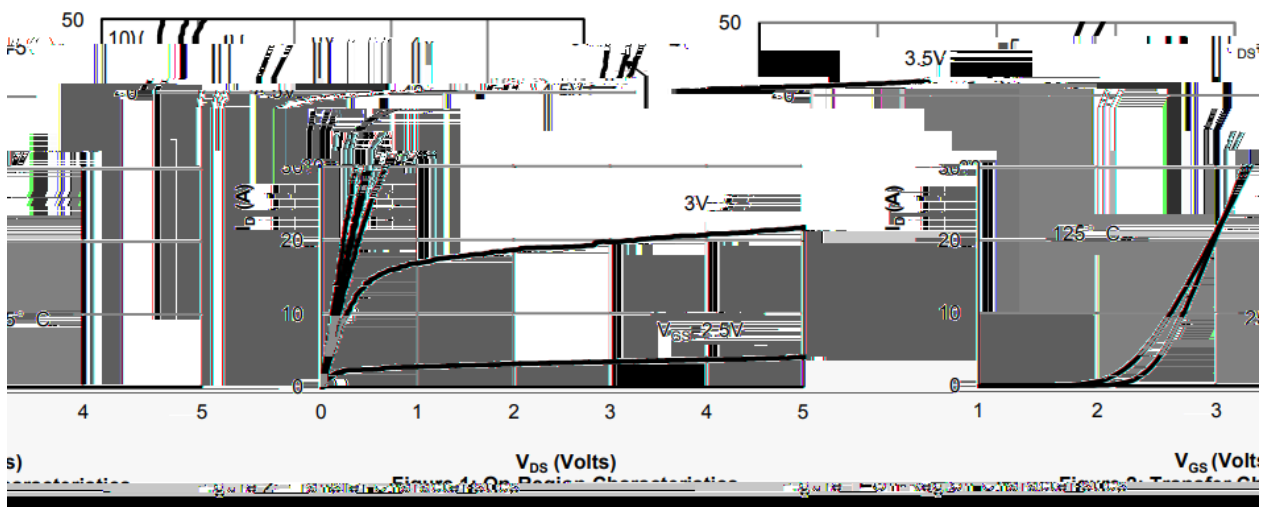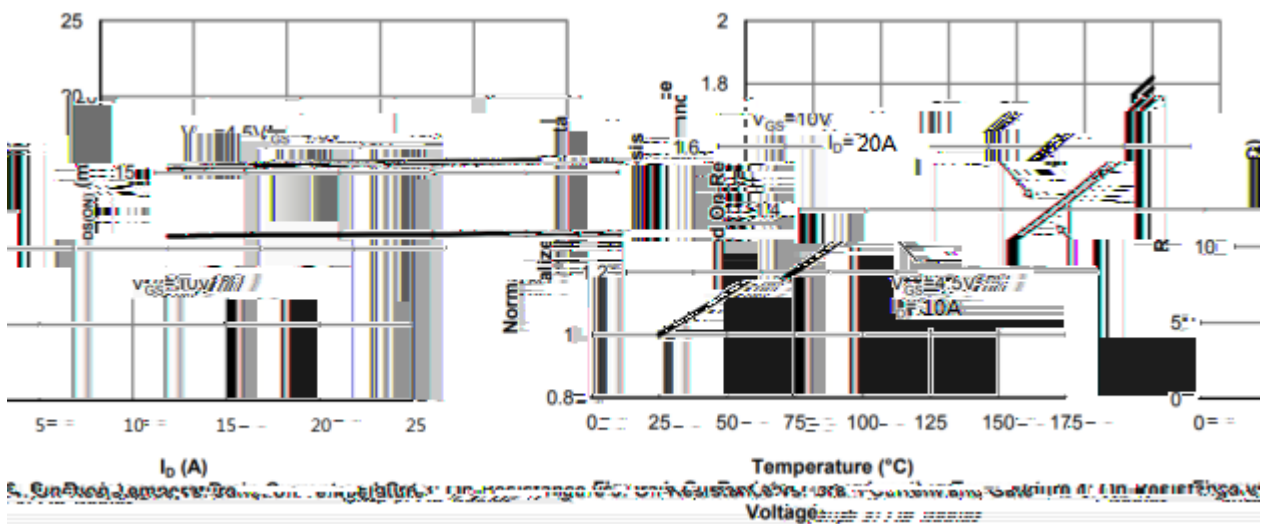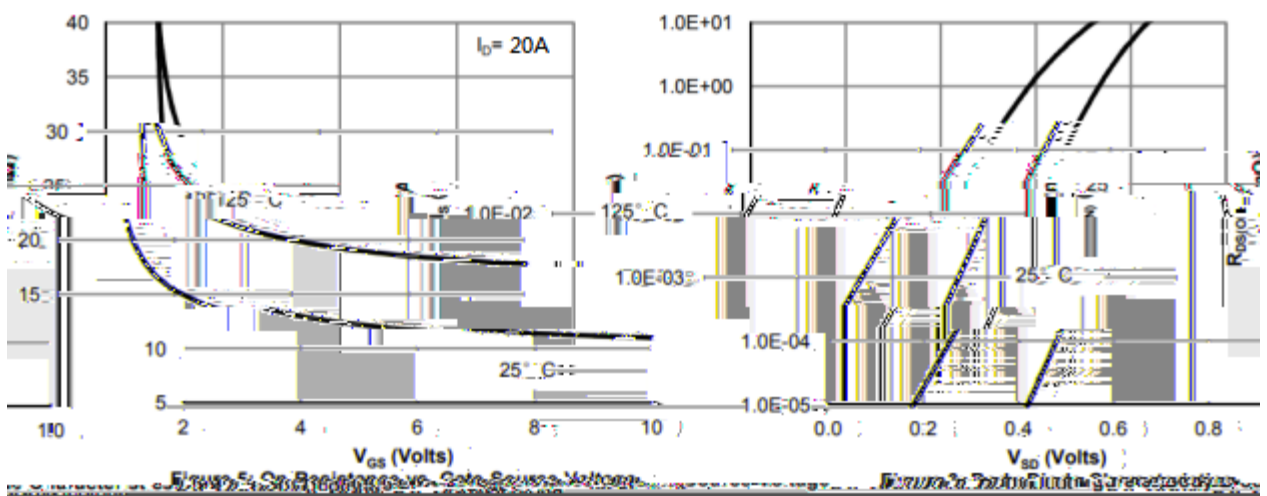


/ Electrical Characteristic Curve

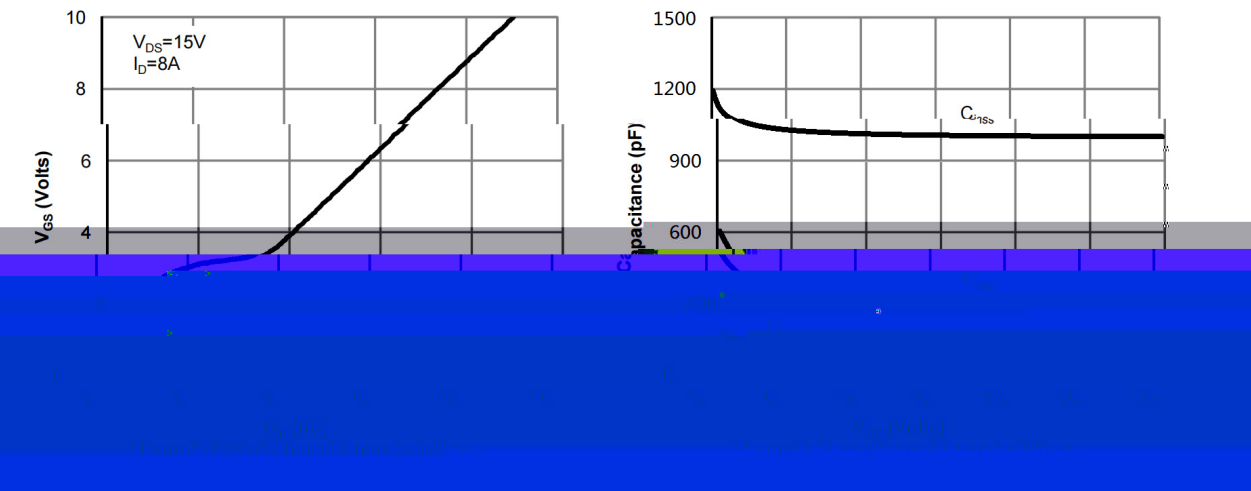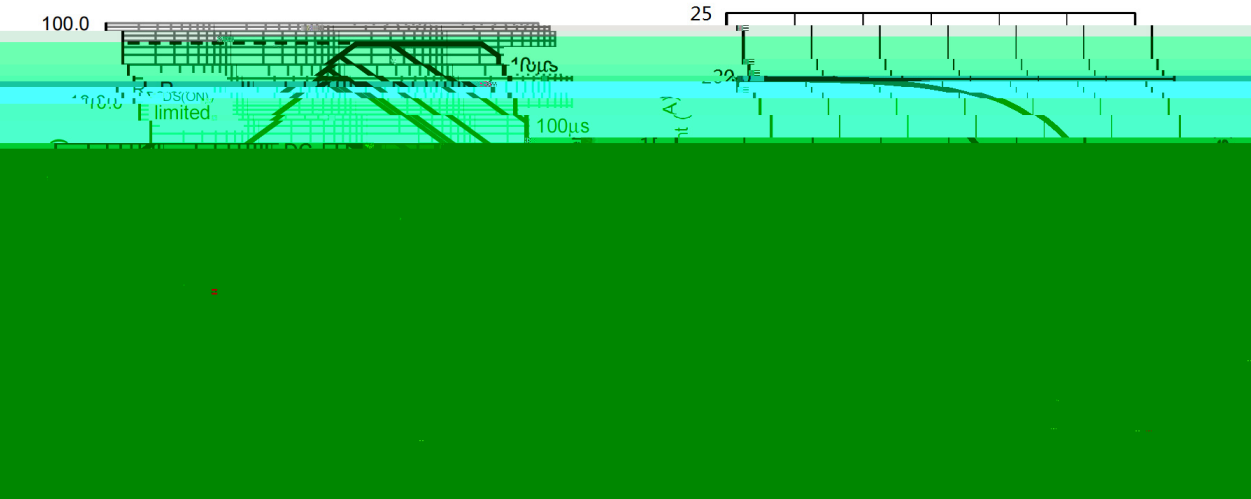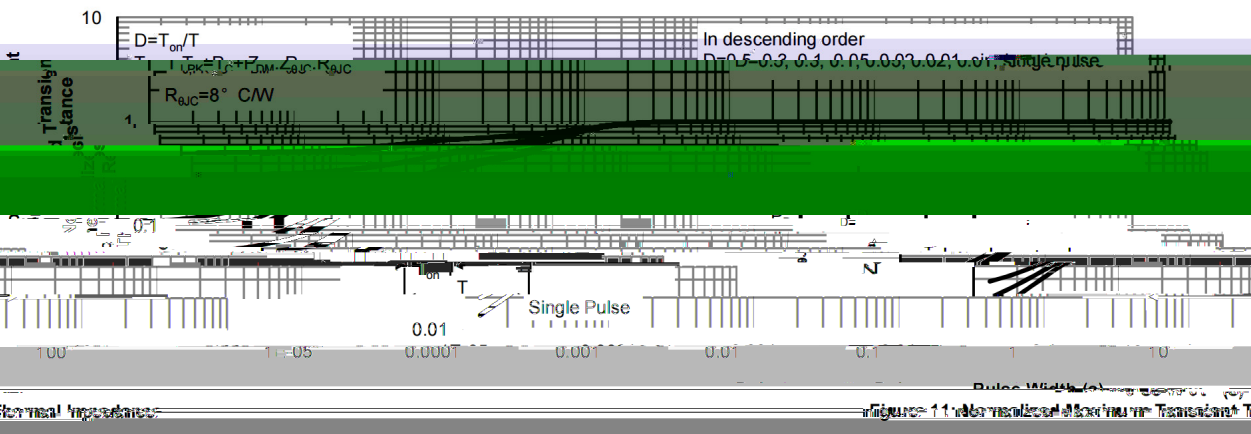

/ Package Dimensions


PDFN3X3A-8L

Unit:mm

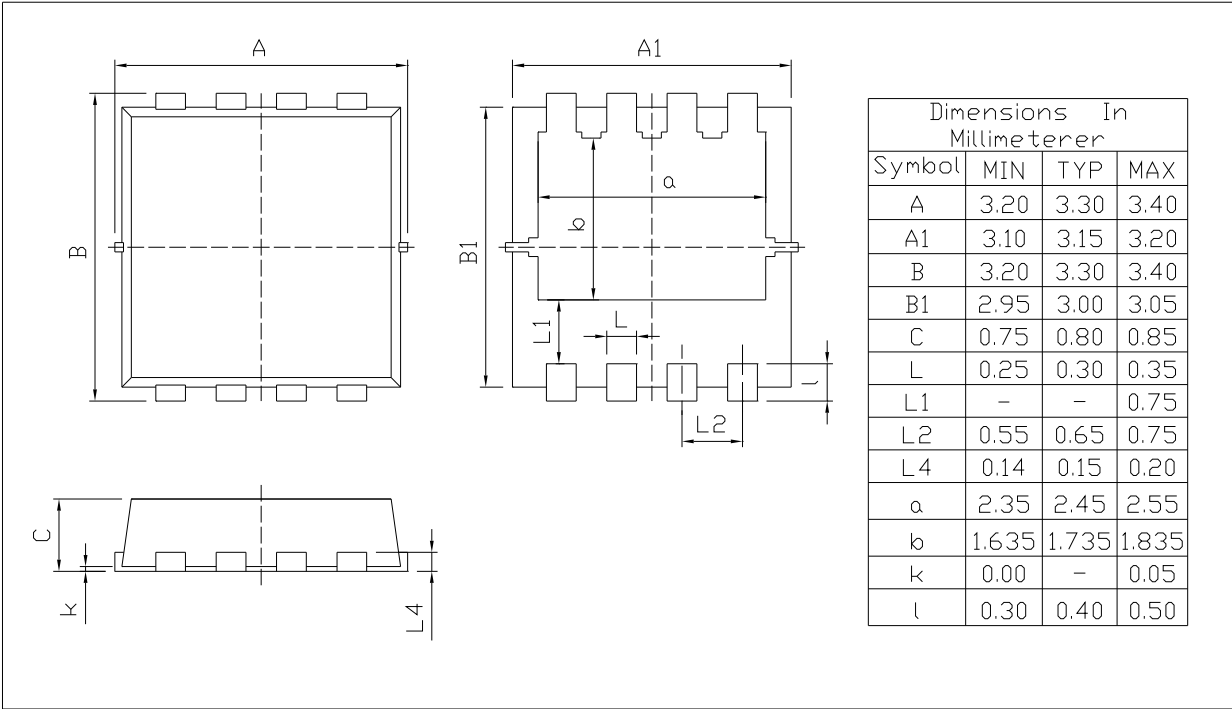

Rev.00 202011

/ Marking Instructions

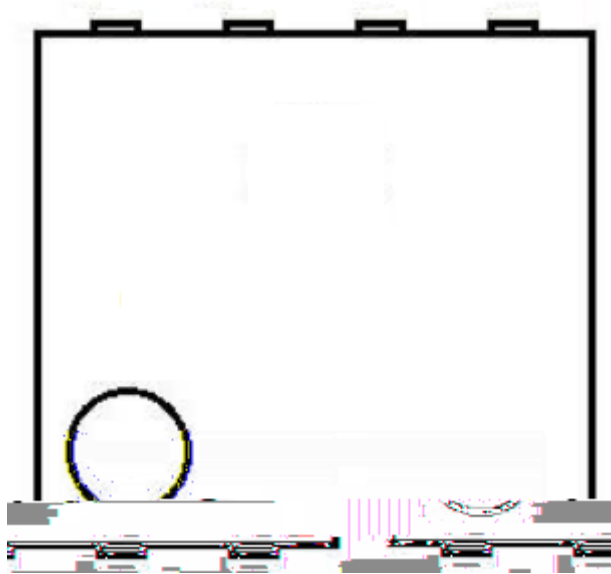

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

7>0 ~ E	;>0 H				;>0 p .		Æ
--	--	-	- 1ç	1ç	-		