

Rev.A May.-2024

PDFN5×6 N

N-Channel MOSFET in a PDFN5 × 6 Plastic Package.

$V_{DS} (V) = 60V$ $I_D = 43A$ ($V_{GS} = \pm 20V$)



$R_{DS(ON)} @ 10V \leq 13m\Omega$ (Typ. 11.5m Ω)

$R_{DS(ON)} @ 4.5V \leq 18m\Omega$ (Typ. 15.5m Ω)

HF Product.

DC-DC

Secondary Side Synchronous Rectification, DC-DC Converter, Motor Control, Load Switching.

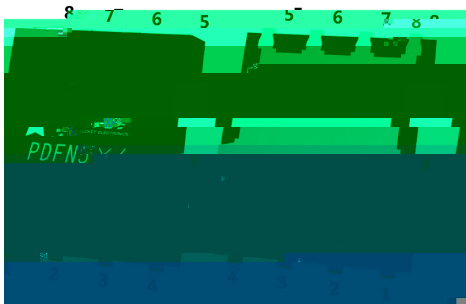

PIN1 2 3 S PIN4 G PIN5 6 7 8 D




Pin	极性
1	S
2	S
3	S
4	G
5	D
6	D
7	D
8	D

See Marking Instructions.

Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DS}	60	V
Continuous Drain Current		I_D	43	A
Pulsed Drain Current		I_{DM}	111	A
Gate-Source Voltage		V_{GS}	± 20	V
Power Dissipation		$P_D(T_c=25^\circ\text{C})$	43	W
Avalanche energy(L=0.5mH)		E_{AS}	200	mJ
Avalanche Current(L=0.5mH)		I_{AS}	20	A
Junction and Storage Temperature Range		T_j, T_{stg}	-55 to 150	
Maximum Junction-to-Ambient	$t \leq 10s$	$R_{\theta JA}$	25	/ W
	Steady-State		60	
Maximum Junction-to-Case	Steady-State	$R_{\theta JC}$	2.9	


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V$ $I_D=250\mu A$	60	64		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=60V$ $V_{GS}=0V$			1	μA
Gate-Body Leakage Current Forward	I_{GSS}	$V_{GS}=\pm 20V$ $V_{DS}=0V$			± 0.1	μA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	1.0	1.6	2.5	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=20A$		11.5	13	m Ω
		$V_{GS}=4.5V$ $I_D=10A$		15.5	18	m Ω
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_S=1A$			1.2	V
Input Capacitance	C_{iss}	$V_{DS}=25V$ $V_{GS}=0V$ $f=1.0MHz$		1010		pF
Output Capacitance	C_{oss}			250		
Reverse Transfer Capacitance	C_{rss}			280		
Gate resistance	R_g	$V_{GS}=0V$ $V_{DS}=0V$ $f=1MHz$		2.3		Ω
Total Gate Charge	$Q_{g(10V)}$	$V_{GS}=10V$ $V_{DS}=30V$ $I_D=13A$		13.5		nC
Total Gate Charge	$Q_{g(4.5V)}$			6.5		
Gate Source Charge	Q_{gs}			2.5		
Gate Drain Charge	Q_{gd}			3.0		

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $V_{DS}=30V$ $R_L=2.3\Omega$ $R_{GEN}=3\Omega$		5		ns
Turn-On Rise Time	t_r			3		
Turn-Off Delay Time	$t_{d(off)}$			19		
Turn-Off Fall Time	t_f			3		

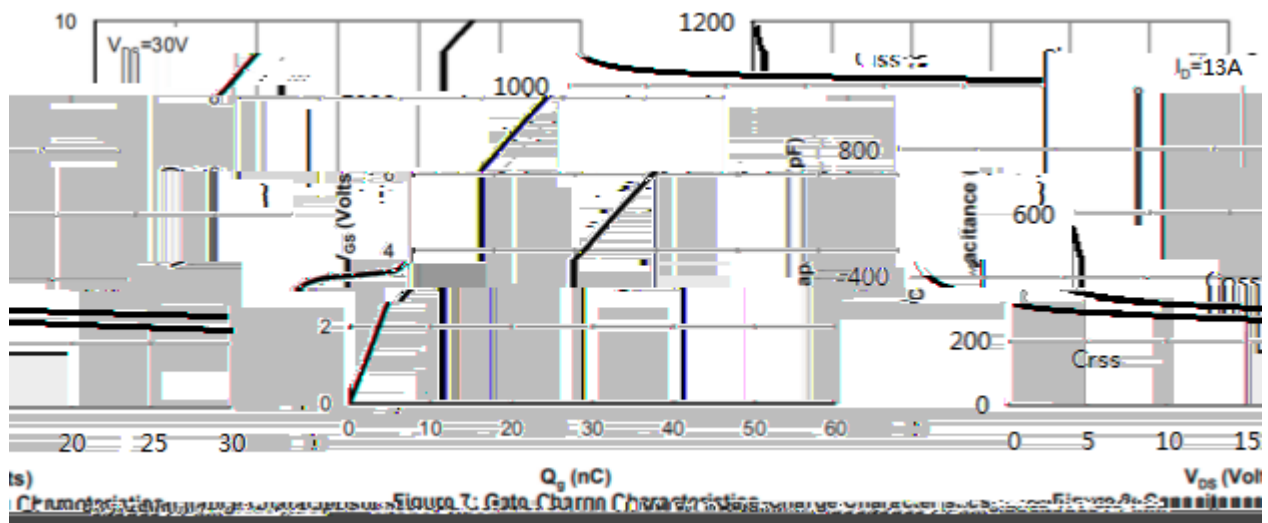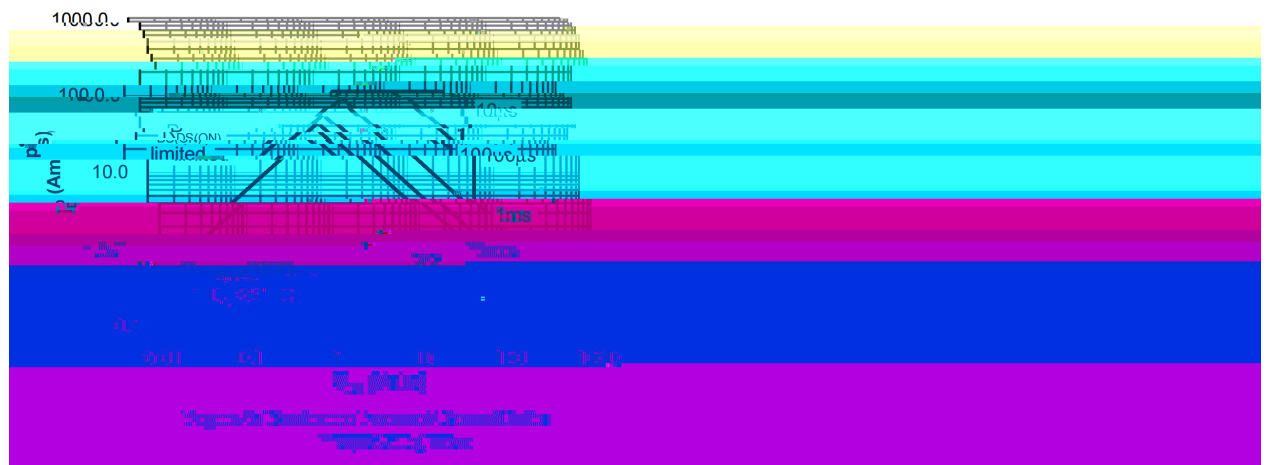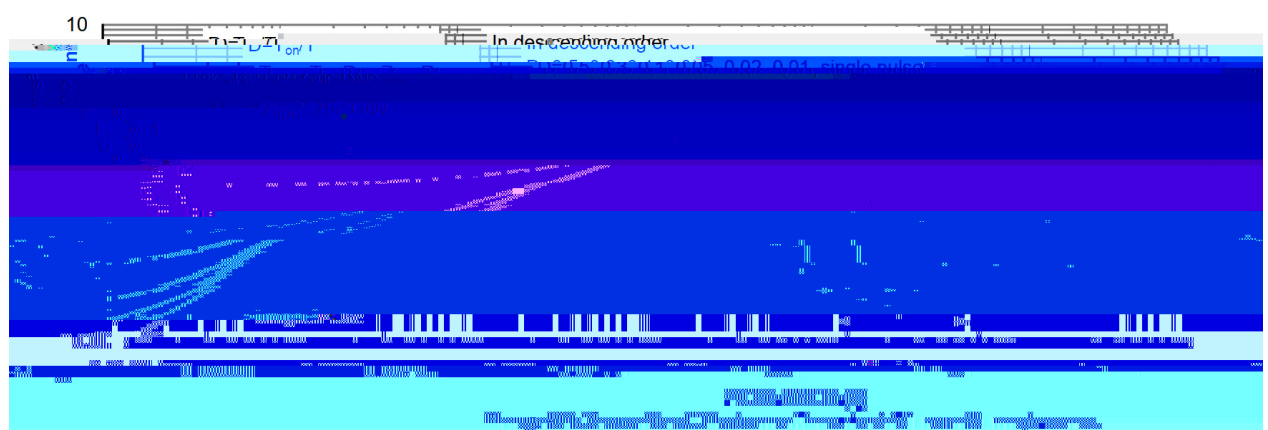


PDFN5 X6

Unit:mm

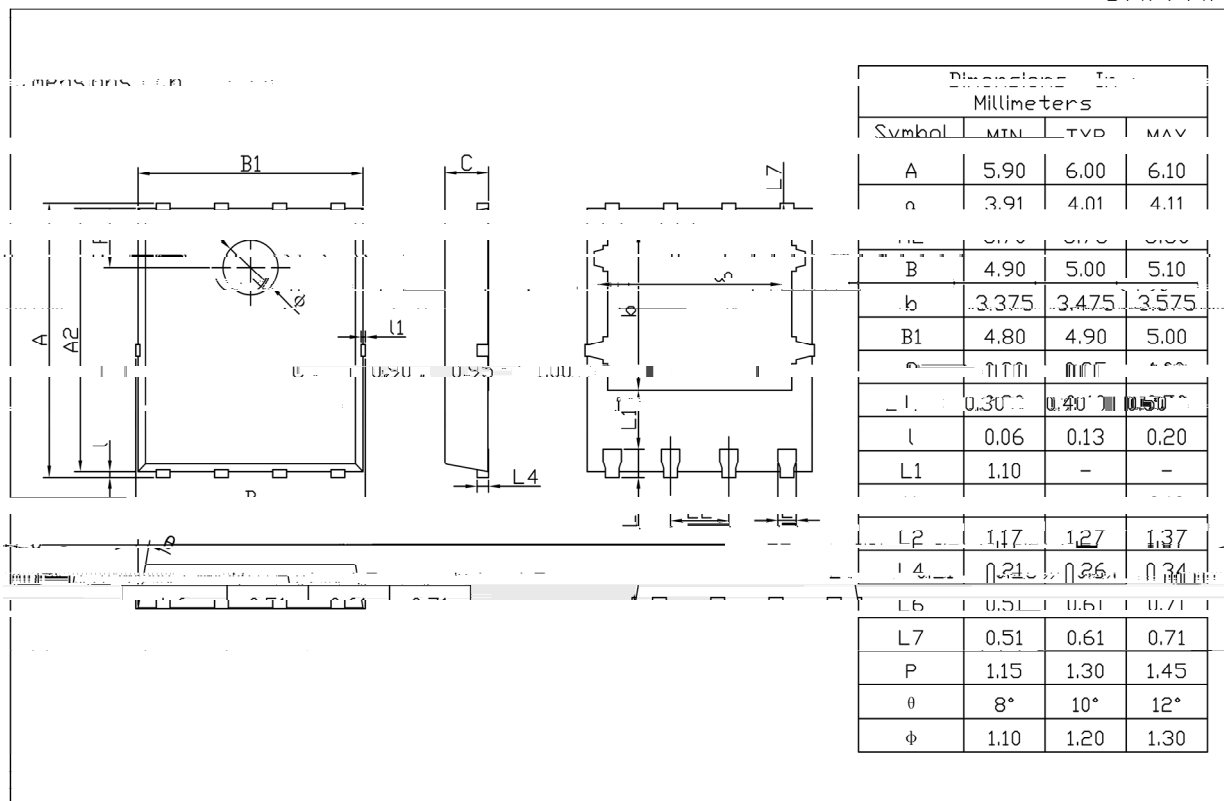

Rev.01 202209

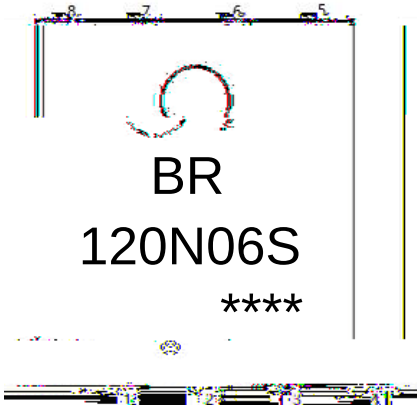

BR

120N06S

Note

BR

120N06S

****:

Company Code

Product Type Code

Lot No. Code, code change with Lot No

Temperature Profile for IR Reflow Soldering(Pb-Free)

- 1

150 180

60 90sec;
- 2

245±5

5±0.5sec;
- 3

2 10

/sec.
- Note:

1.Preheating:150~180 , Time:60~90sec.

2.Peak Temp.:245±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

605±5 5