



!"#\$%&' (' '#####

#

A	2022.08.03	ALL	AOS-AOD ⁴ ₁₈₅		



!"#\$%&'(''#####

67&'8' P 97 :
; & < = " > > ? @ # 9 7 : A ? 6 # C # D # 6 7 & ' 8 ' # ; E D 0 * 3 # ; D 3 F D % ! #
#

@ 4 . # 7 C & 0 0 * D C 3 G # / D 0 * # 0 . B * 3 < n

!"#\$%&' ('#####



!""\$%&' (' '#####

#

#	#	#	#	#	#
;D2D5 * 2#	514E#	6 0*#<4CHB*4C0#	9B#	60+#	9D]#
2C&7C#J EDO#6B5 #			#	c!N#	#
C&7C# B0 #6B5 #		Q_L:S&K(Q####Q_J:S&'(Q# @SKΩ#### L?>SMΩ#		'(#	#
					CO#

#6B5

)**+,-. . .!/012 3!345#

#

#

#


#-#



!"#\$%&' ('#####

#

#


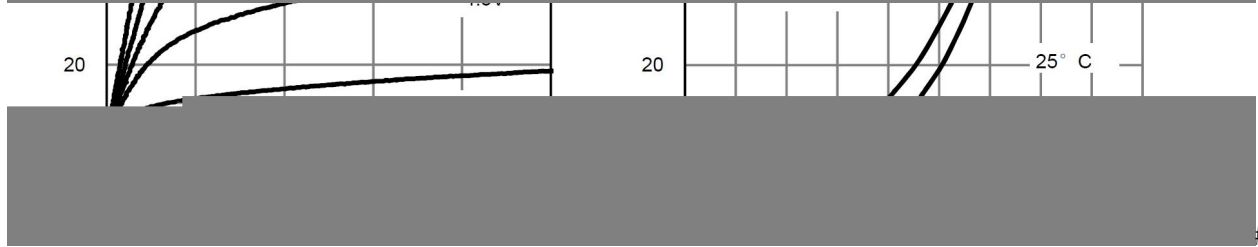




!"#\$%&' ('#####



#

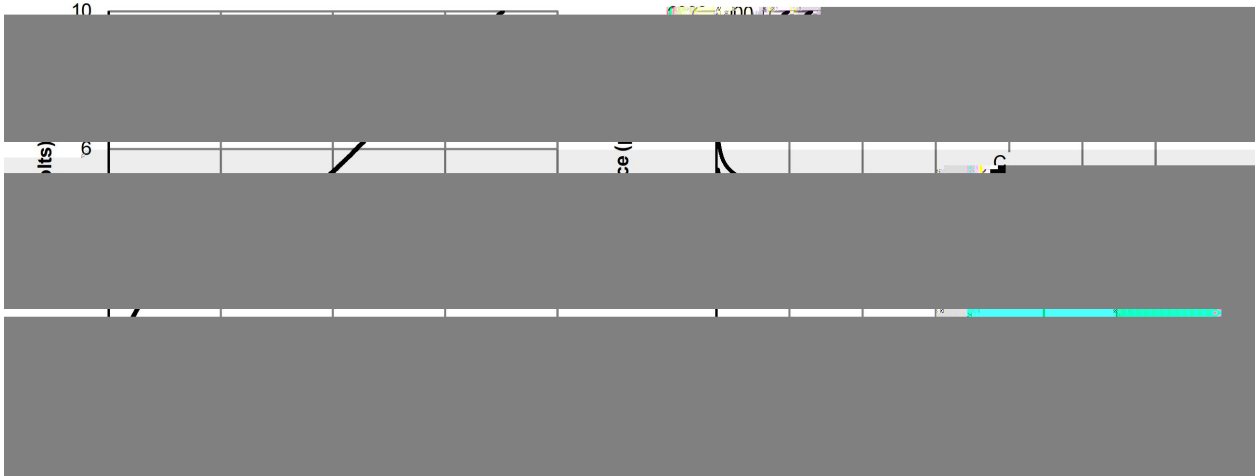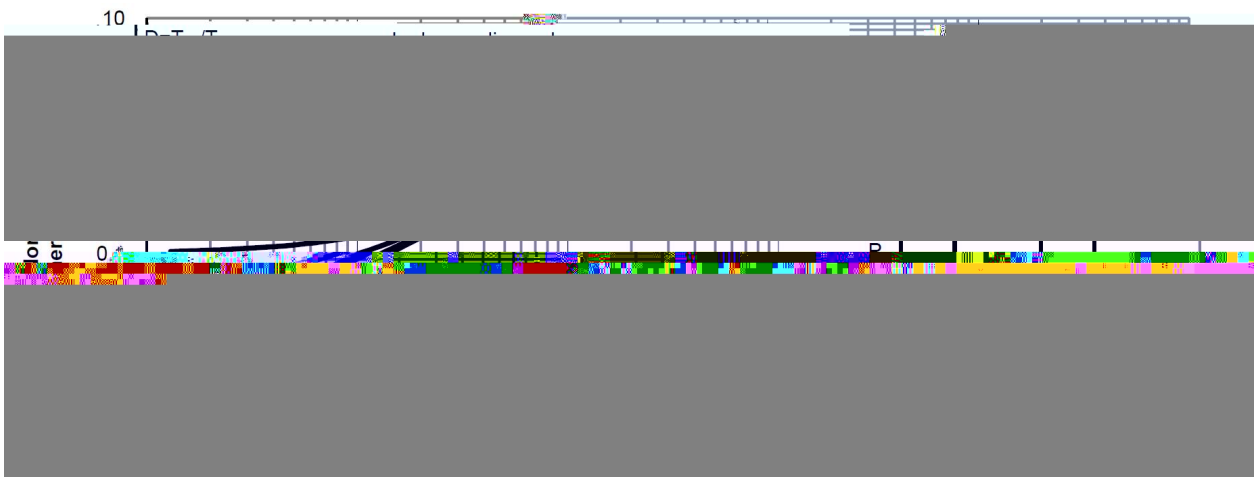



!"#\$%&'('#####

#



#

#

#

#

#

#

#

#

#

#

#

#

#

#


#

#

#

#

#

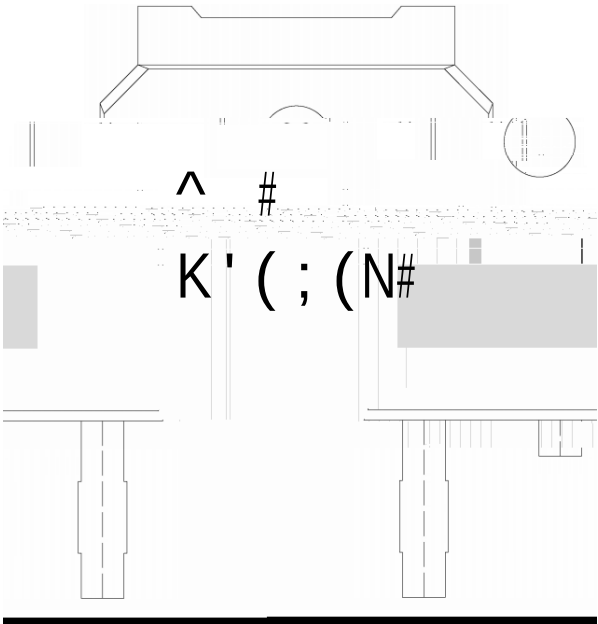

BR

120P04

>4* ,#

^ ,### # <45 +DC0#<4H #

K' (; (N, # # ;24H\$3*#60+ #

ffff, # # # @4*#>4!#<4H (#34H #3)DC% # . B*)#@4*#>4#

#

#



!"#\$%&'(''#####

#

Temperature Profile for IR Reflow Soldering(Pb-Free)

>4* ,#
K K8(KV(W(c(0 3g# # # K! ; 2) D*%C%,K8(hKV(°C#65 ,W(hc(0 3!#
' 'N8±8 8±(!80 3g# # ' ! ; DF#6 5+!, 'N8±8°C#J\$2D*%4C,8±(!80 3!#
M ' K(°C-0 3!# # # # M! <44°C%# : + H,#'hK(°C-0 3!#
#

'W(±8°C# # K(±K#0 3!# # # 6 5+!, 'W(a8°C# # 65 ,K(aK#0 3#
#

##-## ??@#

;D3FD% #60+ # #	PC*0 #					J5 C04C# #		##R\$C* 5 5 ^M T#	
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱				

##-## 6P^?#

;D3FD% #60+ #	PC*0 #					J5 C04C# #		##R\$C* 5 5 ^M T#	