





BRCS

BRCS150N10SRA

/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $V_{DS}=50V$ $R_L=2.5\Omega$ $R_{GEN}=3\Omega$		7		ns
Turn-On Rise Time	t_r			3		
Turn-Off Delay Time	$t_{d(off)}$			27		
Turn-Off Fall Time	t_f			4		


/ Electrical Characteristic Curve

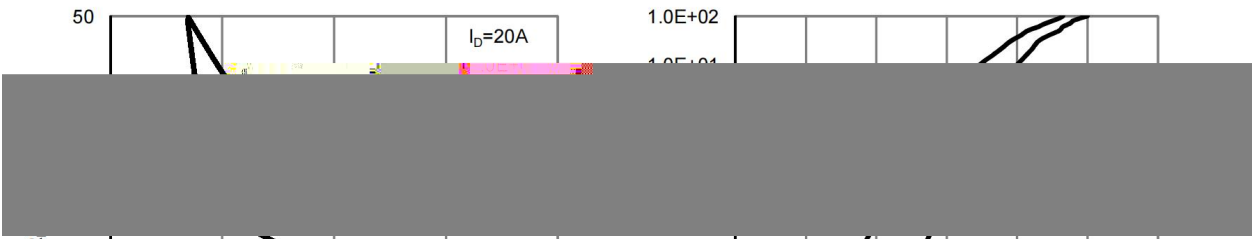

/ Package Dimensions



/ Marking Instructions

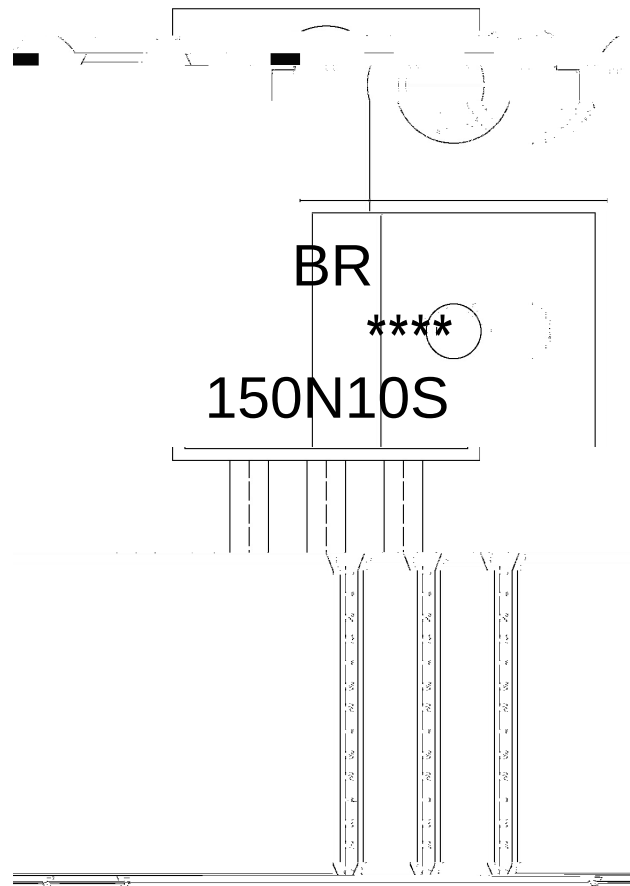


说明：

- ： 为公司代码
- ： 为型号代码
- ： 为生产批号代码，随生产批号变化

Note:

- BR: Company Code
- 150N10S: Product Type
- ****: Lot No. Code, code change with Lot No

() / Temperature Profile for Dip Soldering(Pb-Free)

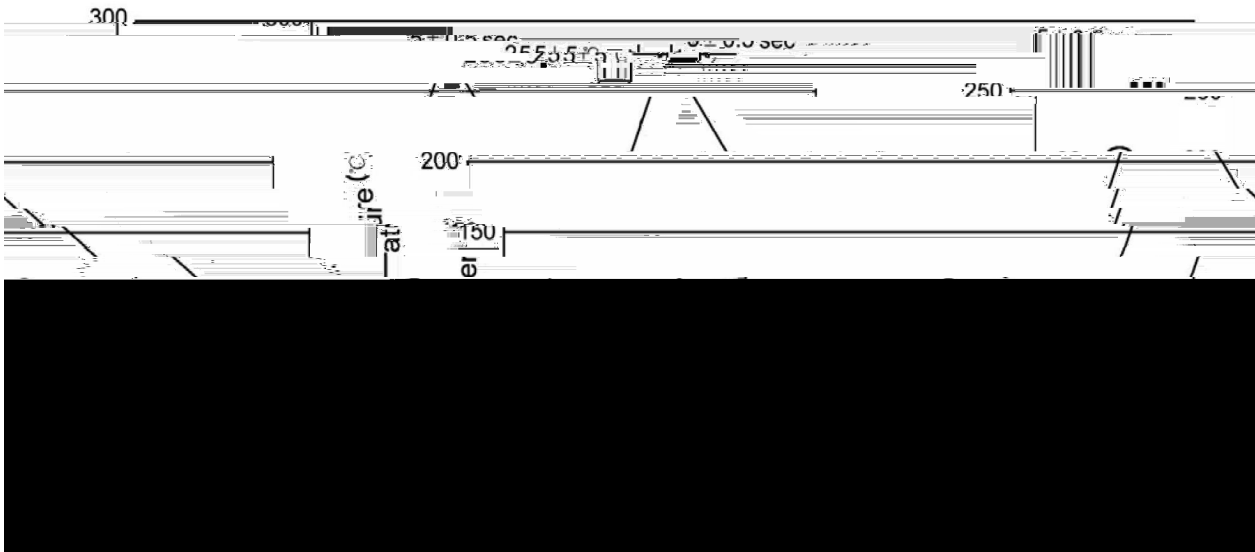

		Note:	
1	25 150	60 90sec;	1.Preheating:25~150°C, Time:60~90sec.
2	255±5	5±0.5sec;	2.Peak Temp.:255±5°C, Duration:5±0.5sec.
3	2	10°C/sec.	3. Cooling Speed: 2~10°C/sec.

/ Resistance to Soldering Heat Test Conditions

270±5°C	10±1 sec.	Temp.:270±5°C	Time:10±1 sec
---------	-----------	---------------	---------------

/ Packaging SPEC.

/ BULK

Package Type	Units	Dimension	(unit mm ³)
封	Units/Bag 只/		