





Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V _{DSS}	-20	V
Gate-Source Voltage	V _{GSS}	±12	V
Continuous Drain Current			

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
-----------	--------	-----------------	-----	-----	-----	------


/ Electrical Characteristic Curve

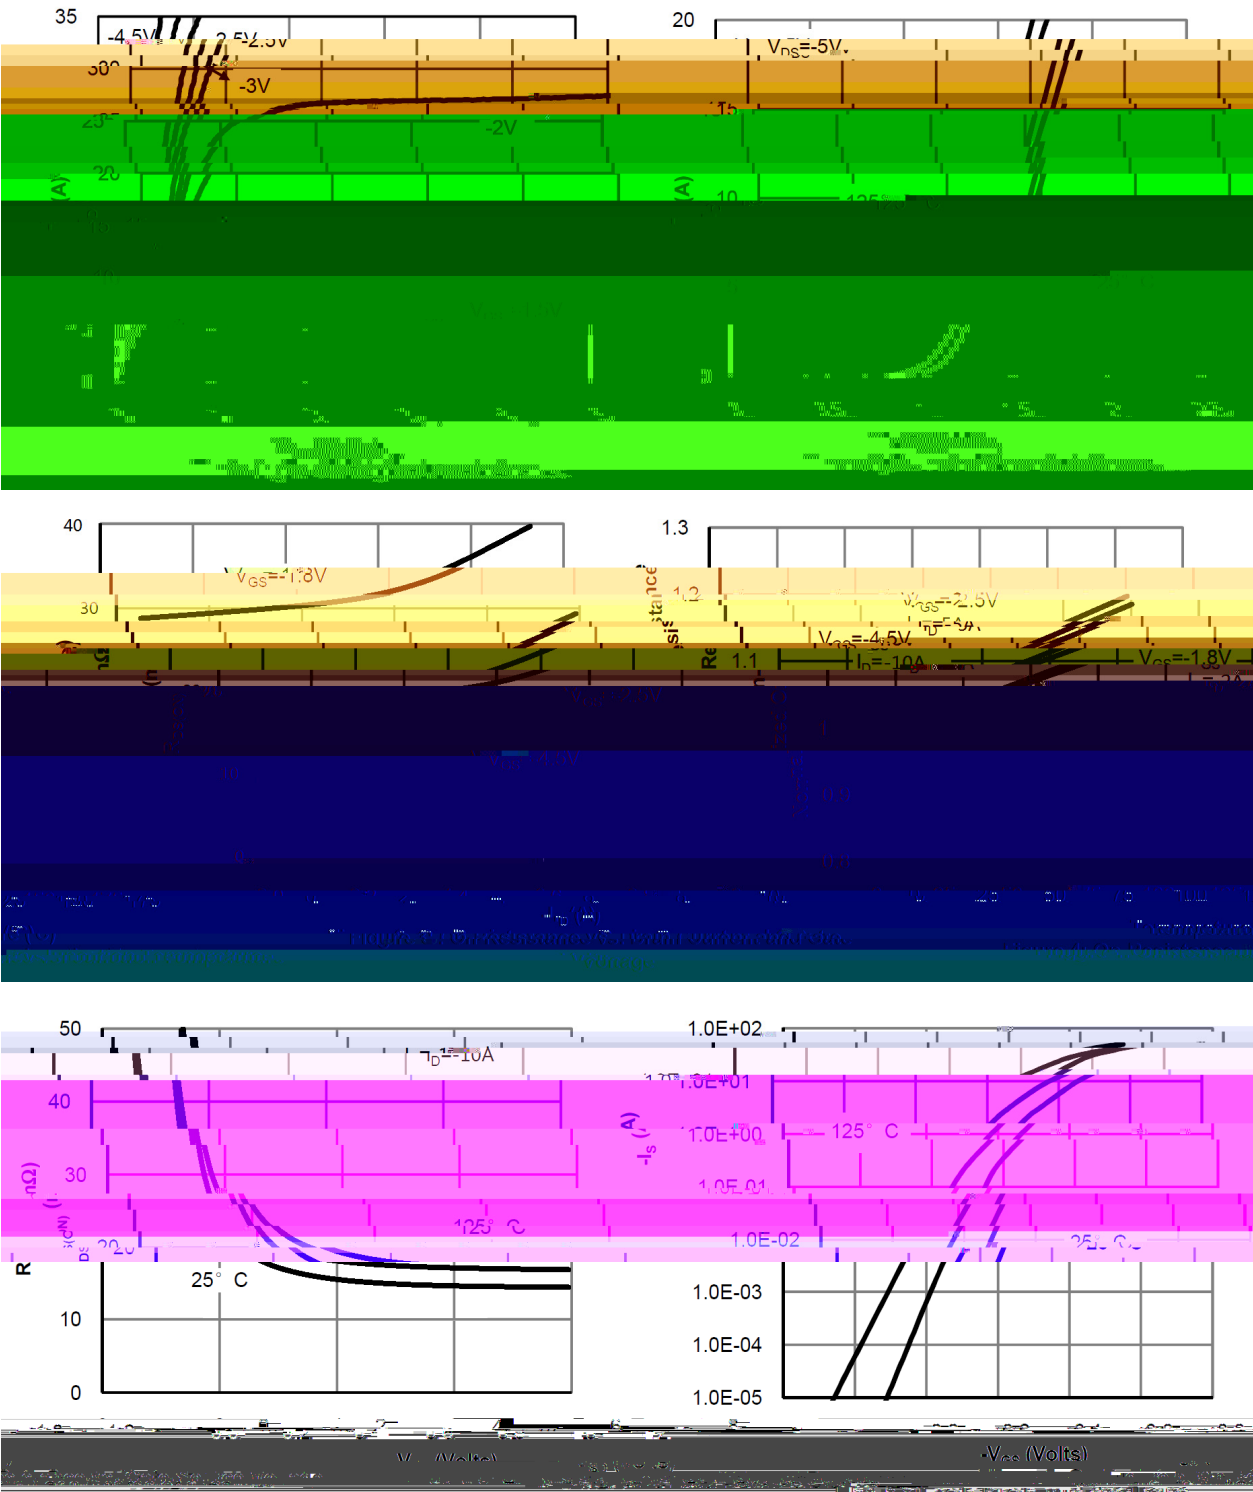


/ Electrical Characteristic Curve

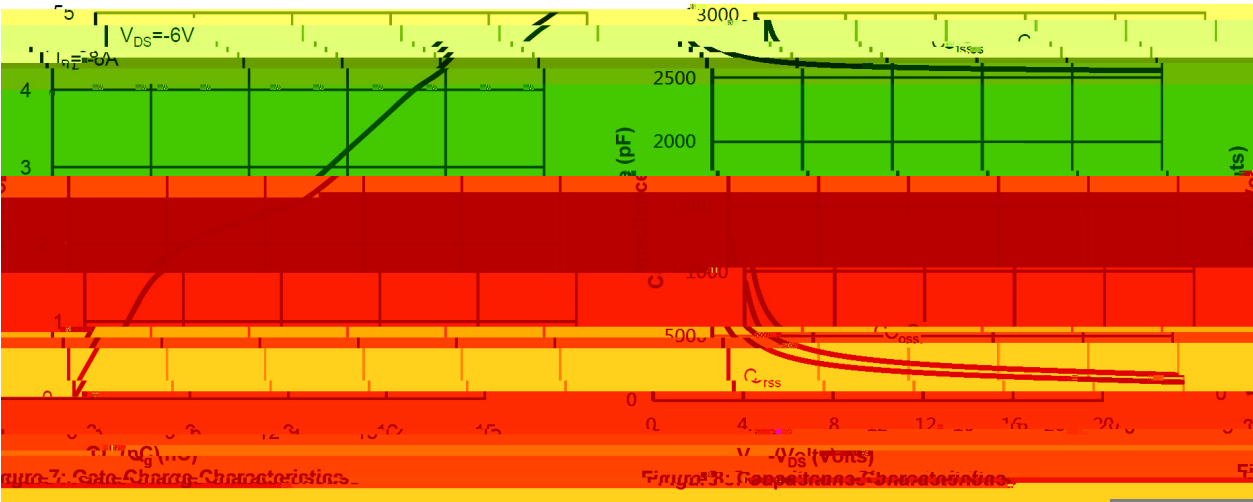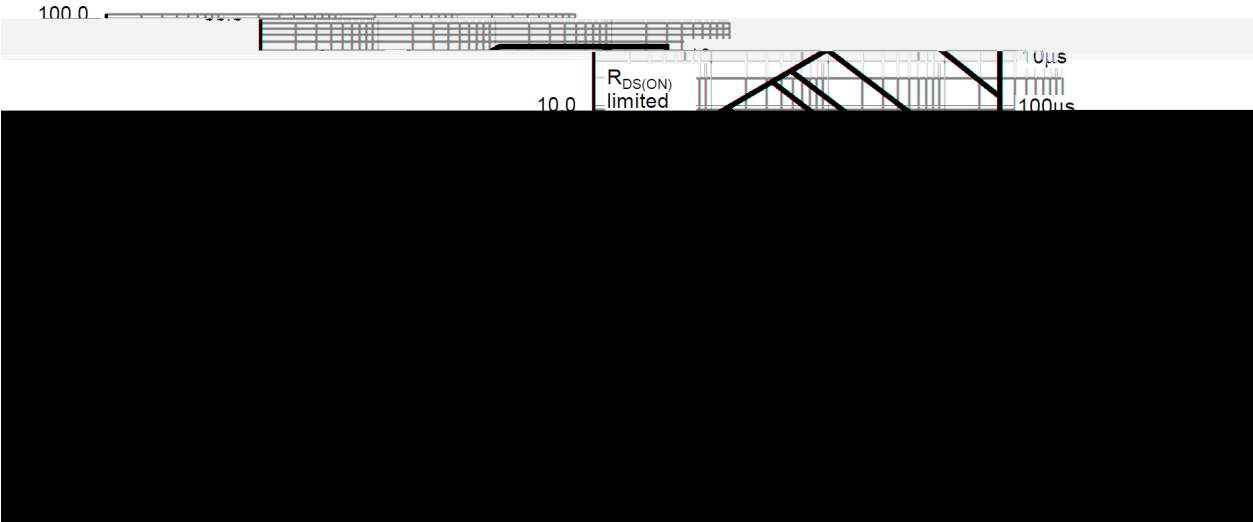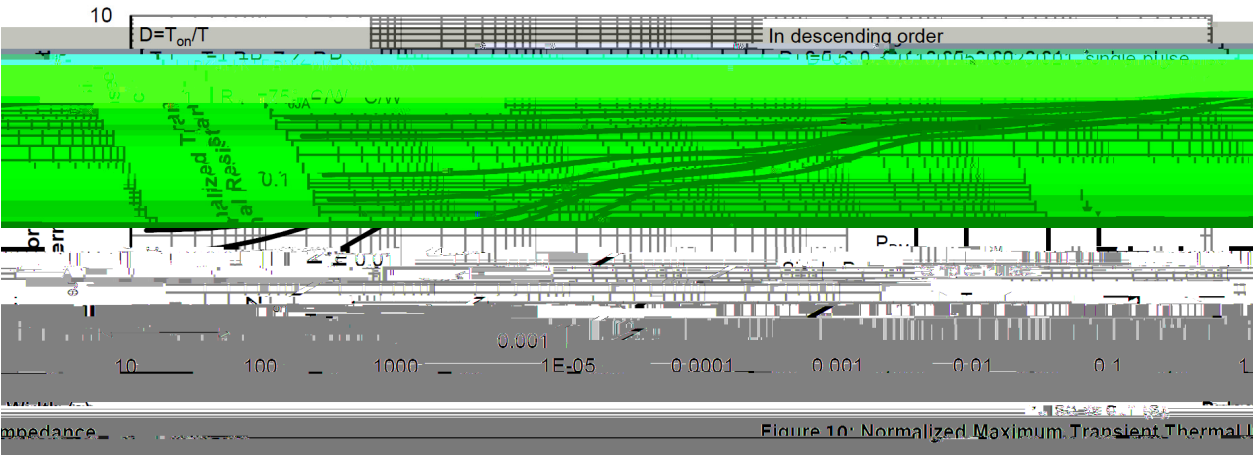

/ Package Dimensions

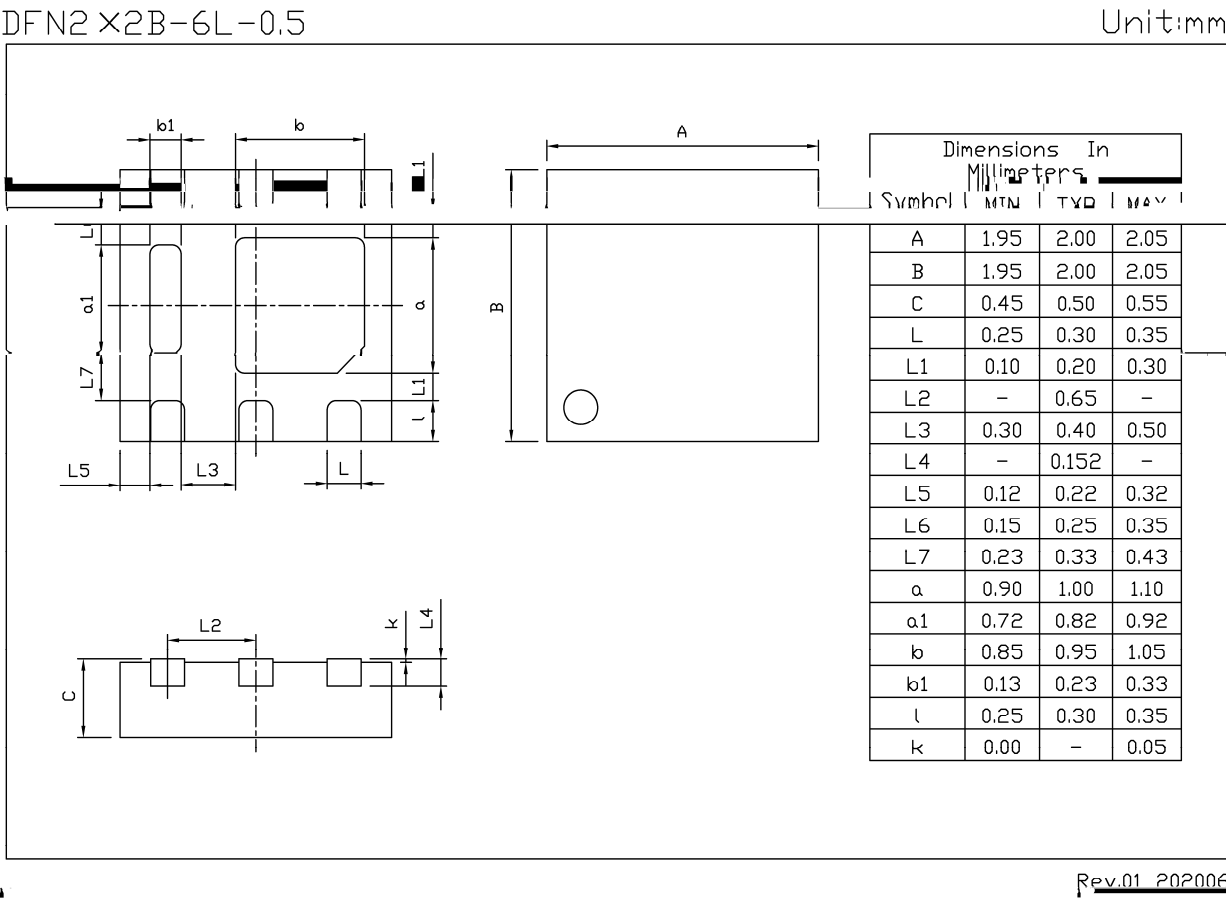

/ Marking Instructions

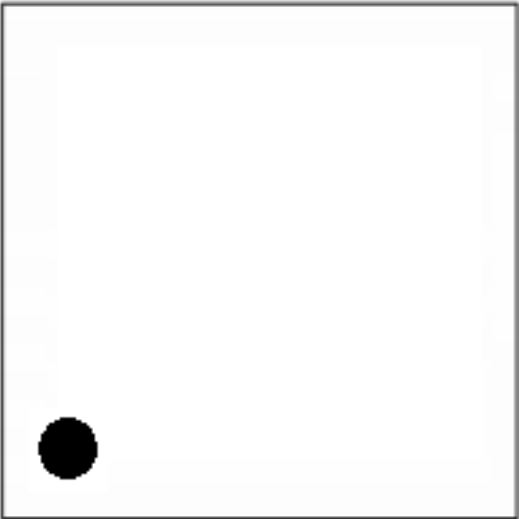

BR

150P02

Note:

BR: Company or-43(4der-43(4)TJ/*..0004 Tc(.694 Tw[h50P02):-84(C.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

- Note:
- 11501806090sec;

1.Preheating:150~180, Time:60~90sec.
- 2245±55±0.5sec;

2.Peak Temp.:245±5, Duration:5±0.5sec.
- 3