
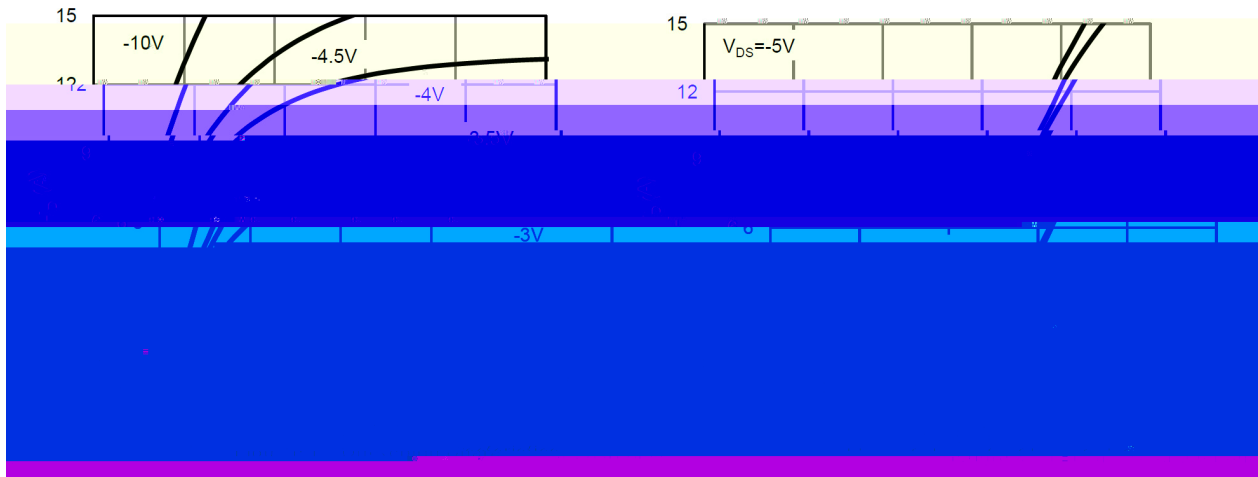
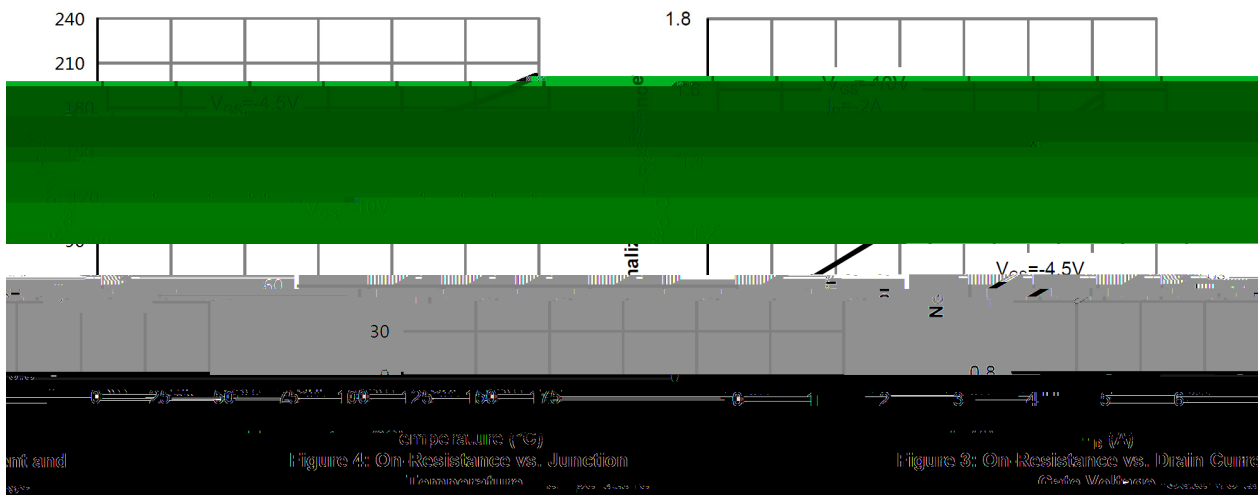


Rev.A Oct.-2022




Rev.A Oct.-2022


Parameter	Symbol	Rating	Unit
Drain–Source Voltage	V_{DS}	-60	V
Gate–Body Leakage Voltage	V_{GS}	± 20	V
Drain Current – Continuous	I_D	-2.3	A
Pulsed Drain Current	I_{DM}	-9	A
Power Dissipation	P_D	1.25	W
Operating and Storage Temperature Range	T_J, T_{STG}	-55 150	


Rev.A Oct.-2022

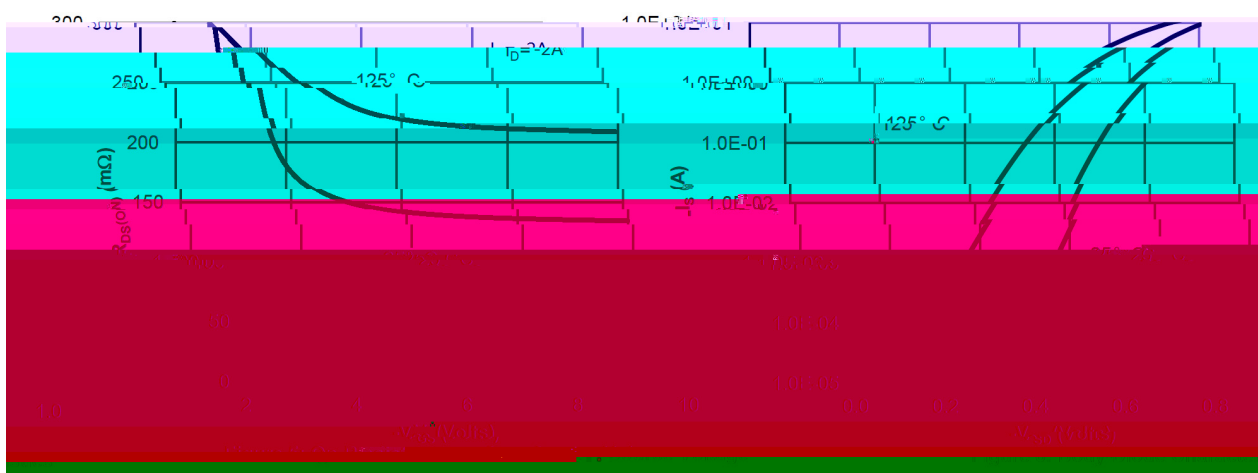

Rev.A Oct.-2022

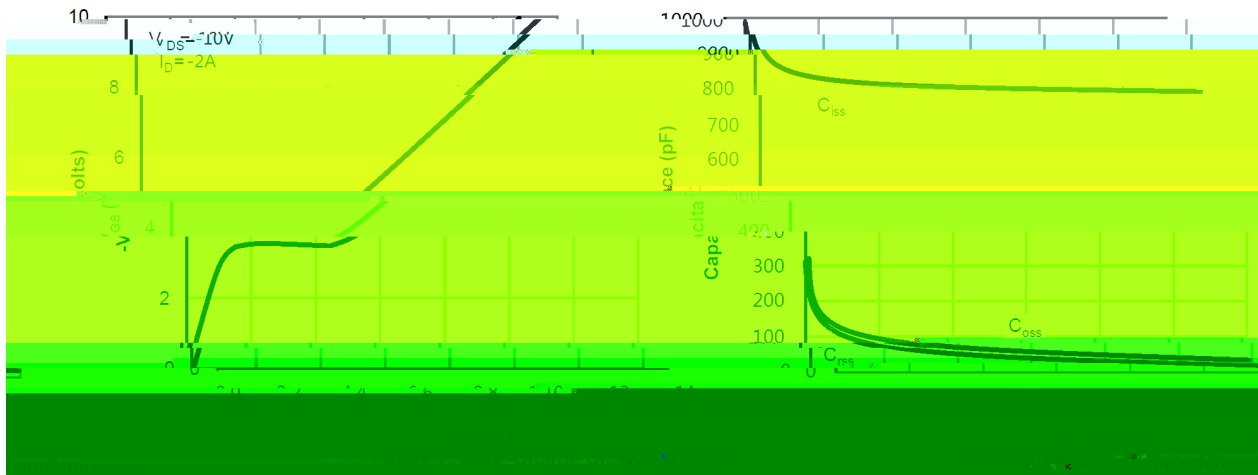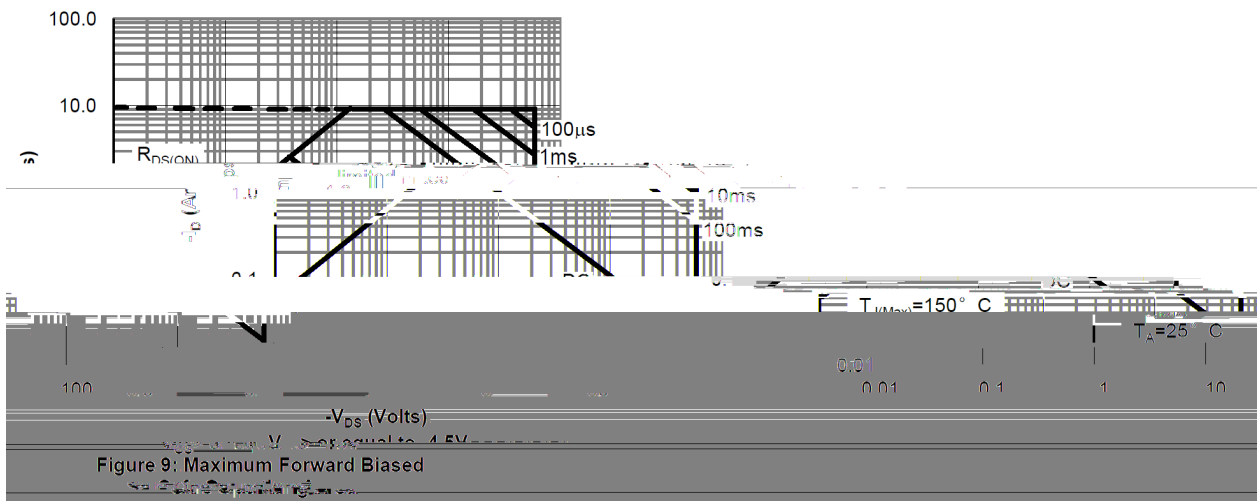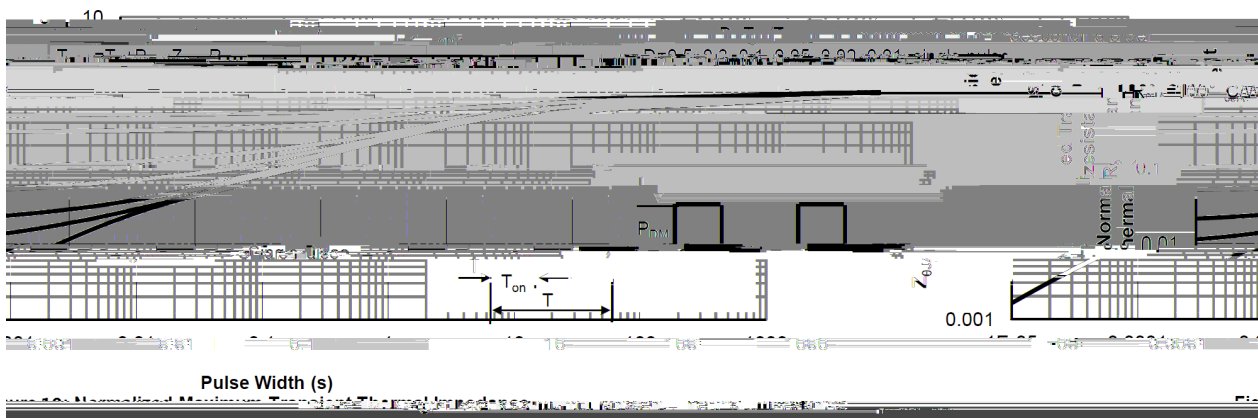



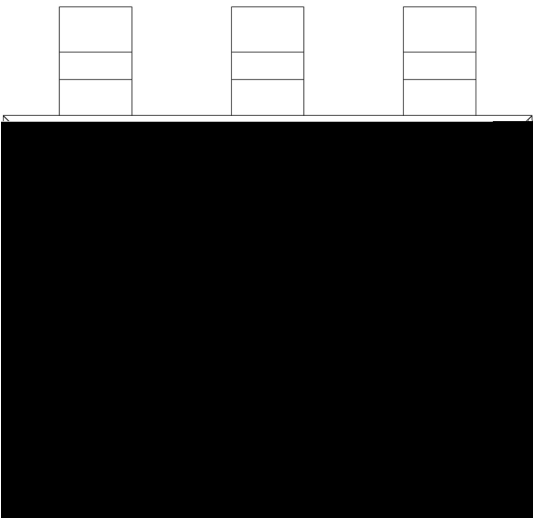

2P06:

****:

Note:

2P06	Product Type
****:	Company Code

