


|   |          |  |                                     |  |   |
|---|----------|--|-------------------------------------|--|---|
|   |          |  |                                     |  | A |
| A | 2022.7.5 |  | AOS-AON2812<br>AOS-AON2260(SOA,RJA) |  |   |



/ Descriptions

DFN 2×2C-6L                    N+N                    MOS


×

/ Features


±  
。 HF Product.

/ Applications

/ Equivalent Circuit



/ Pinning

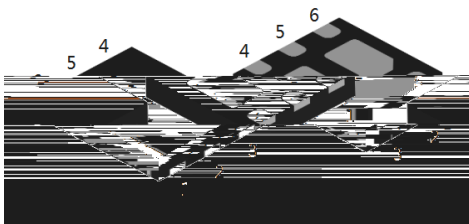


| 出脚    | 定义 |
|-------|----|
| PIN 1 | S1 |
| PIN 2 | G1 |
| PIN 3 | D2 |
| PIN 4 | S2 |
| PIN 5 | G2 |
| PIN 6 | D1 |

/ Marking


4










/ Package Dimensions

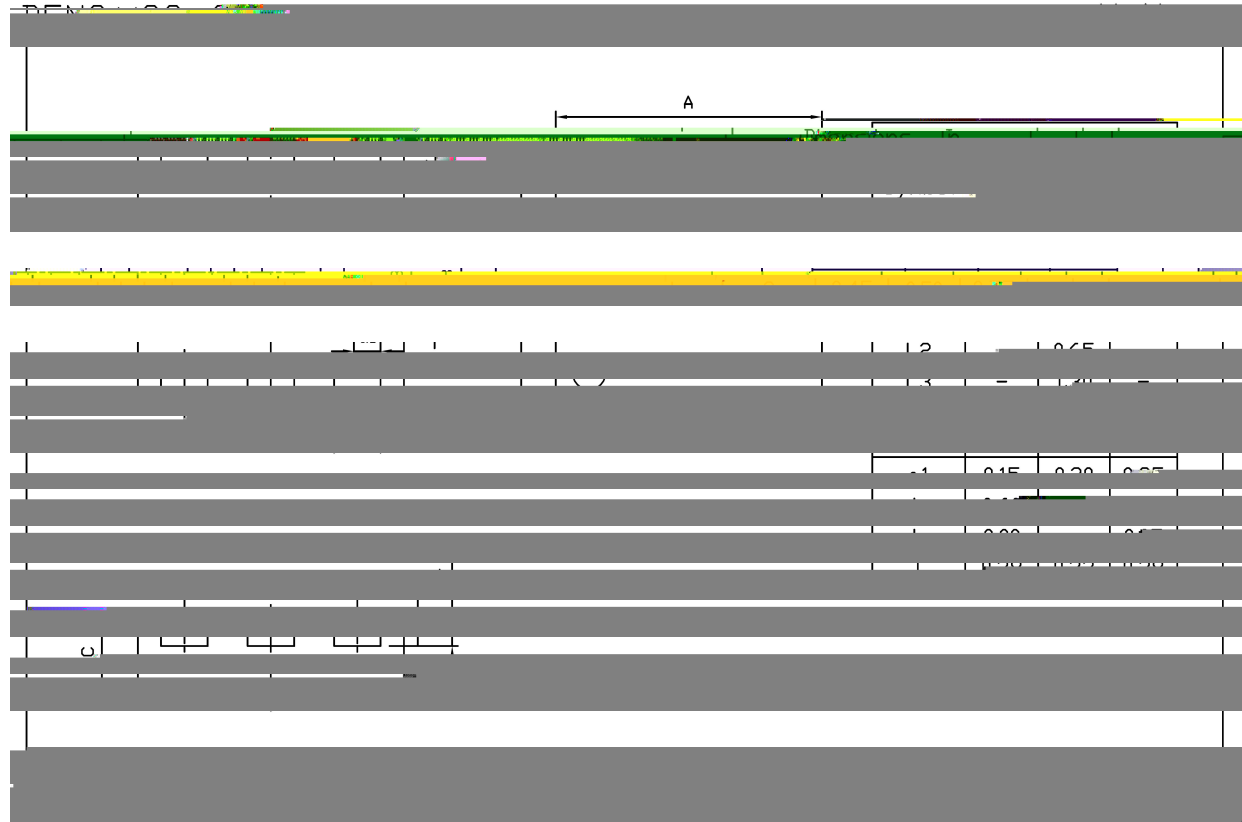



/ Marking Instructions

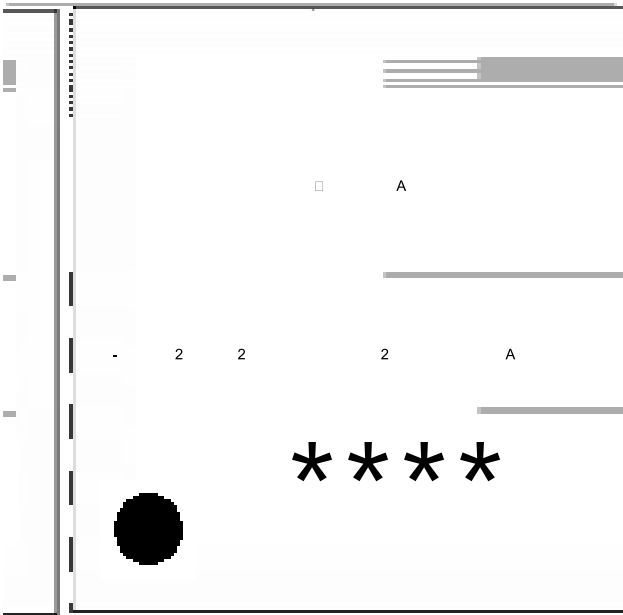



(     ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

|  |
|--|
|  |
|  |
|  |
|  |
|  |
|  |
|  |

.....