



#

A	2022.06.28	All	AOS-AON6452 BR-BRCS250N10SYB		

--	--	--	--	--	--



789: #; x< : . #
: '=*>&& ?#@AB9CD#&#>#789: #; X<#7?>1#4#7>4F>G #!#
#

H_{8B}#IHJ#K#L))H#
M₈#K(N"#IH_{OB}#K# ±()HJ#
8BIA:JPL)H≤()6 IDQ,!LN6 J#
。HF Product.

DC/DC AC/DC DC/DC
BQ&4*35&5%1#3 4#E0E4>#E5&#E&#8=.8=#>&R#"=.8=#45& 3+ 31, M15?>+ R#8=.8=#=5& 3+ 31#E&#D ? 455)



/ Absolute Maximum Ratings(Ta=25)

# 7>3>6 + 3#	# BQ6 25?#	# >+E&G#	# V&E+ #
83>E&'B5%34 #H5?+>G #	H _{8B} #	L))#	H#
83>E&#=%33 &+ #	ℳ ₈ ID4K(; °C J#	(N#	"#
83>E&#=%33 &+ #'7%?1 R#	ℳ ₈ @#	<)#	"#
O>+ 'B5%34 #H5?+>G #	H _O B#	W()#	H#
B E&G? #7%?1 R#" >?>&4* #C& 3GQ#	C "B#	LT!T#	6\$#
" >?>&4* #=%33 &+ #	ℳ "B#	< #	"#
75 / 3#8E11E , >+E5&#	7 ₈ ID4K(; °C J#	S ; #	X#
A , 3>+E&G#>&R#B+53>G #D 6 , 3>+%3 # >&G #	D _{\$} \D _{1+G} #	' ; ; #+5#L ;)#	°C#
\$%&4+E5&'5' " 6 2E &+ # +≤L)#	Z\$ " #	S)#	°C . X#
\$%&4+E5&'5' " 6 2E &+ # B+ >RQ'B+>+ #		<T#	
\$%&4+E5&'5' =>1 # B+ >RQ'B+>+ #	Z\$ =#	SI ; #	

#

材料 104 6

BRCS200N10SZC



!"#\$%&'()((##### DATA SHEET
#

BRCS200N10SZC



!"#\$%&'()((##### DATA SHEET
#

#



Page 00 of 201012

#

/ Marking Instructions

#

#####

#

#

#

#

#


#

#

#

#

#

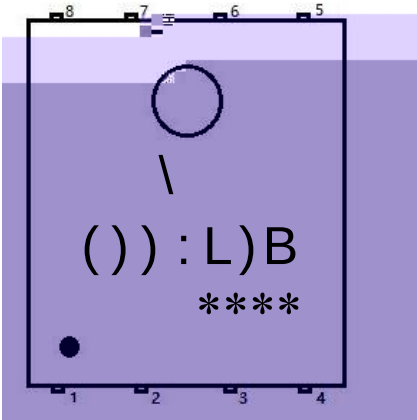

()) : L)B #

#

: 5+ #

\ # =5 6 , > & Q # =5 R #

()) : L)B ## 7 3 5 R % 4 + # D Q , #

eeee-# # ` 5 + # : 5 ! # =5 R Y # 4 5 R # 4 \* > & G # / t + \* # ` 5 + # : 5 #



#

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

: 5+ #
L L;) LN) <) ^)1 4f# # # L!73 * >+E&G-L;)gLN)°CY#D£6 -<)g^)1 4!#
((T;±; ;±)!;1 4f# # (!7 >F#D 6 ,!-(T;±;°CY#8%3>+E5&-;±)!;1 4!#
S (L)°C.1 4!# # # # S! =55%E&G#B, R-#(gL)°C.1 4!#
#

/ Resistance to Soldering Heat Test