

/ Descriptions

P


/ Features

AEC-Q101


/ Applications

PWM

/ Equivalent Circuit



/ Pinning

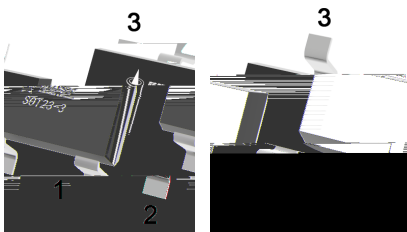




/ Marking

|  |  |
|--|--|
|  |  |
|--|--|


|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|




## / Electrical Characteristic Curve

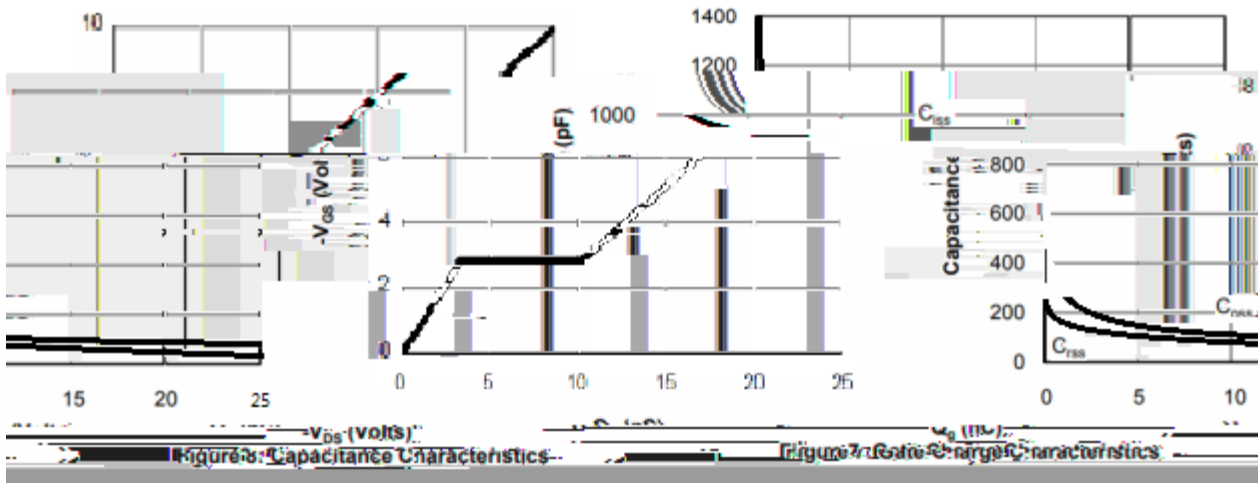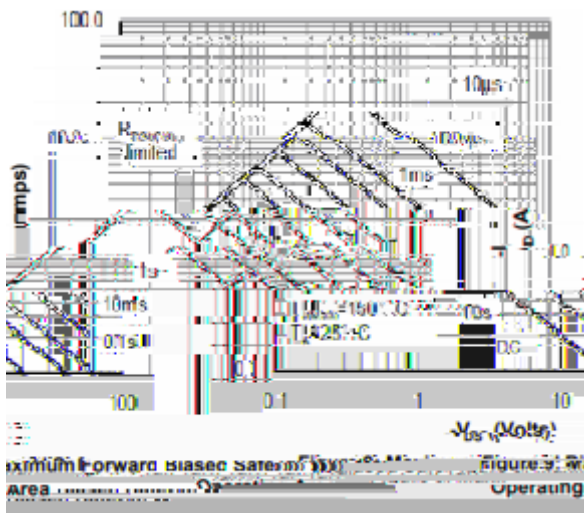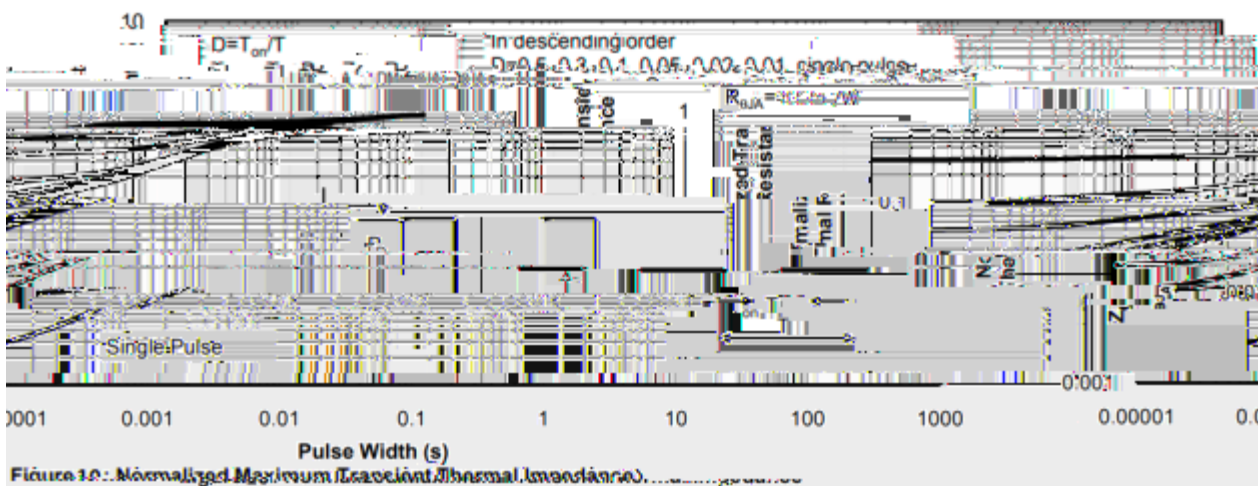



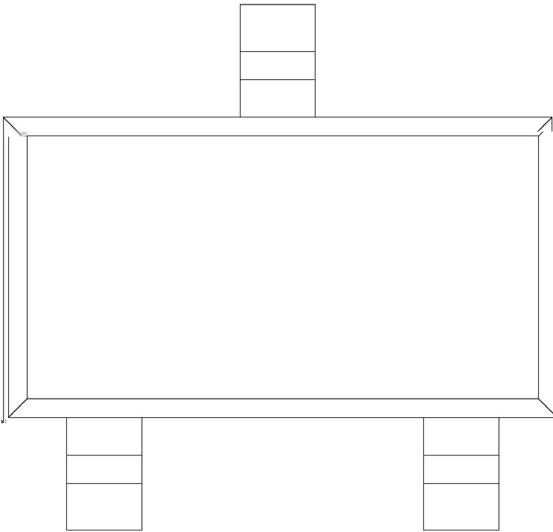

(   ) /

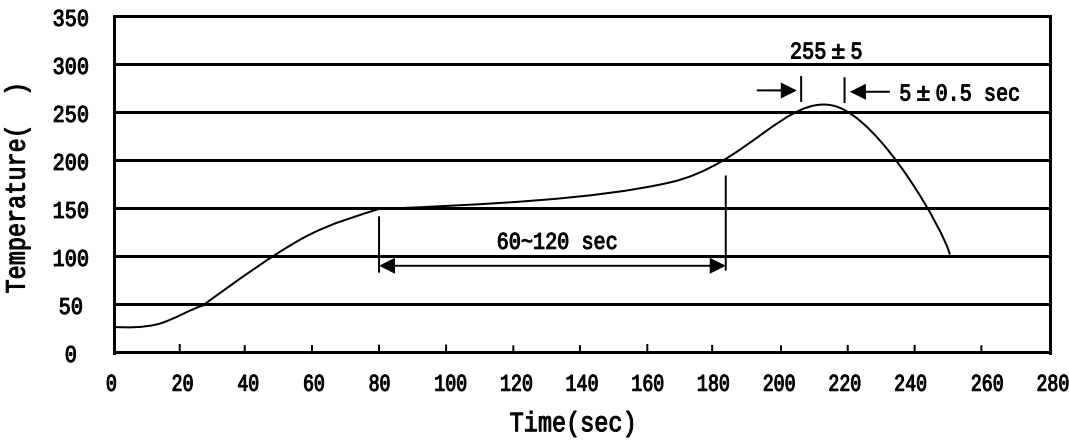

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

|  | Units/Reel<br>/ | Reels/Inner Box<br>/ | Units/Inner Box<br>/ | Inner Boxes/Outer Box<br>/ | Units/Outer Box<br>/ | Reel | Inner Box | Outer Box |
|--|-----------------|----------------------|----------------------|----------------------------|----------------------|------|-----------|-----------|
|  |                 |                      |                      |                            |                      |      |           |           |

/ Notices