


/ Descriptions

/ Features


2KV

/ Applications

/ Equivalent Circuit






/ Pinning

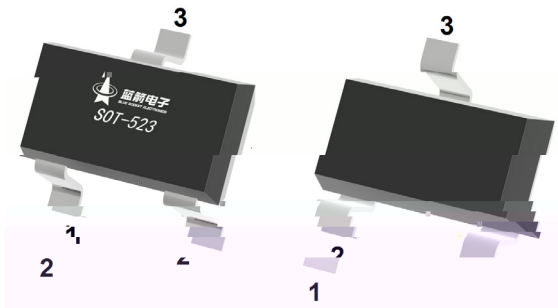


/ Marking

--	--

/ Electrical Characteristic Curve

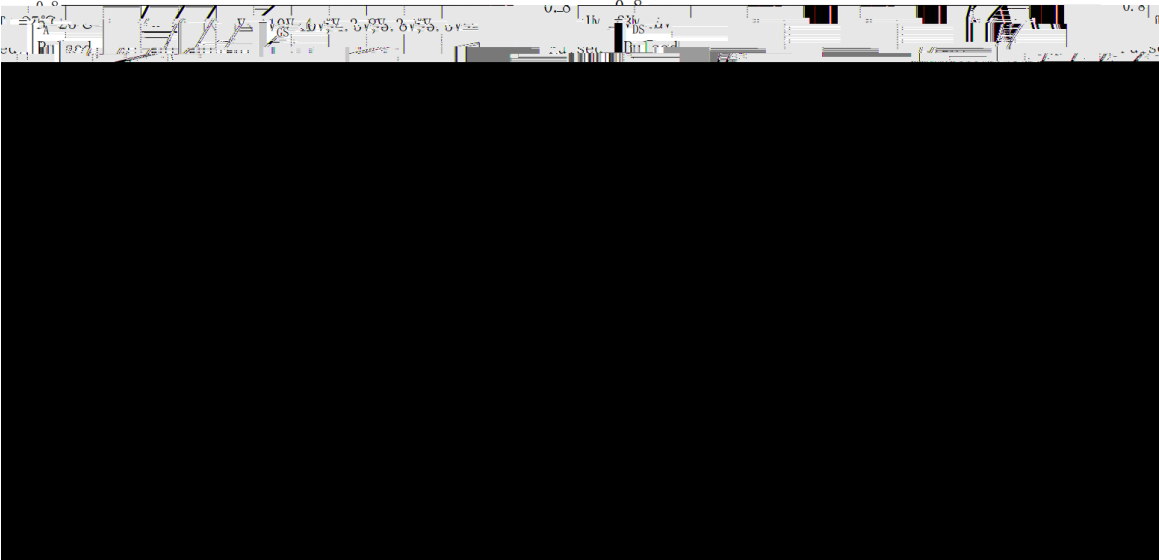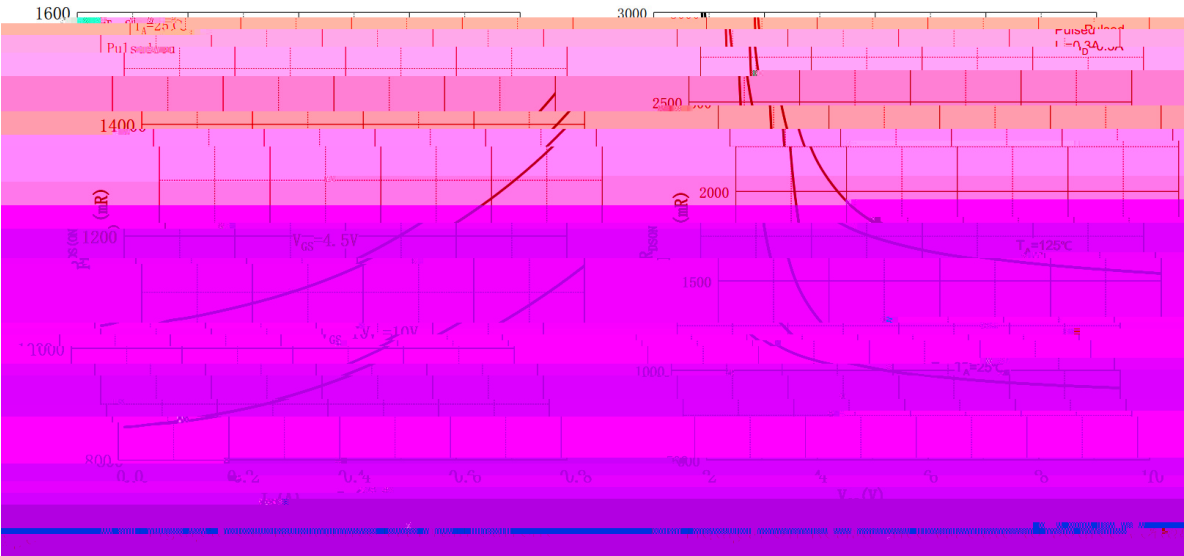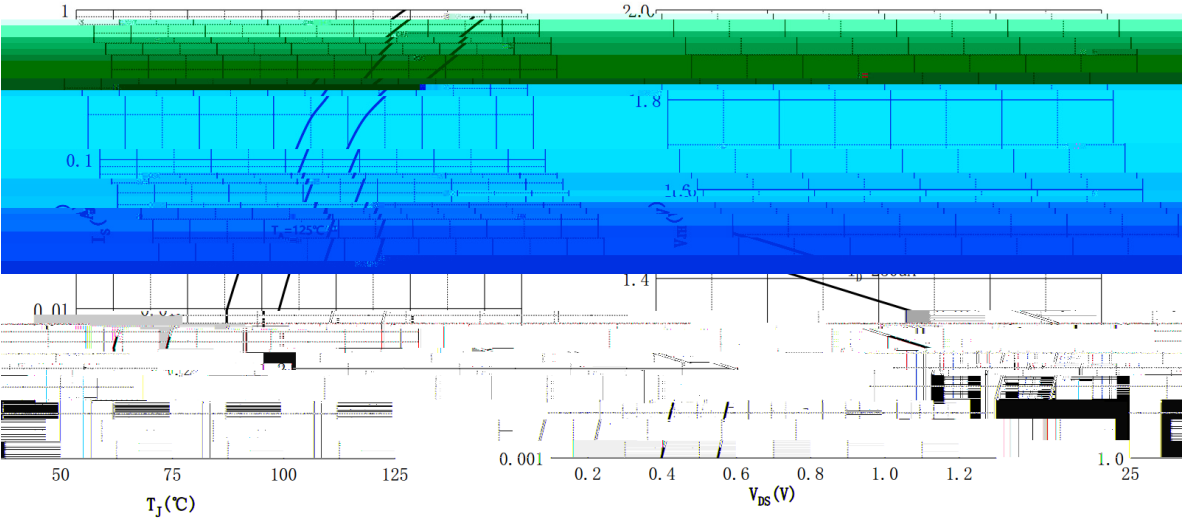


/ Package Dimensions

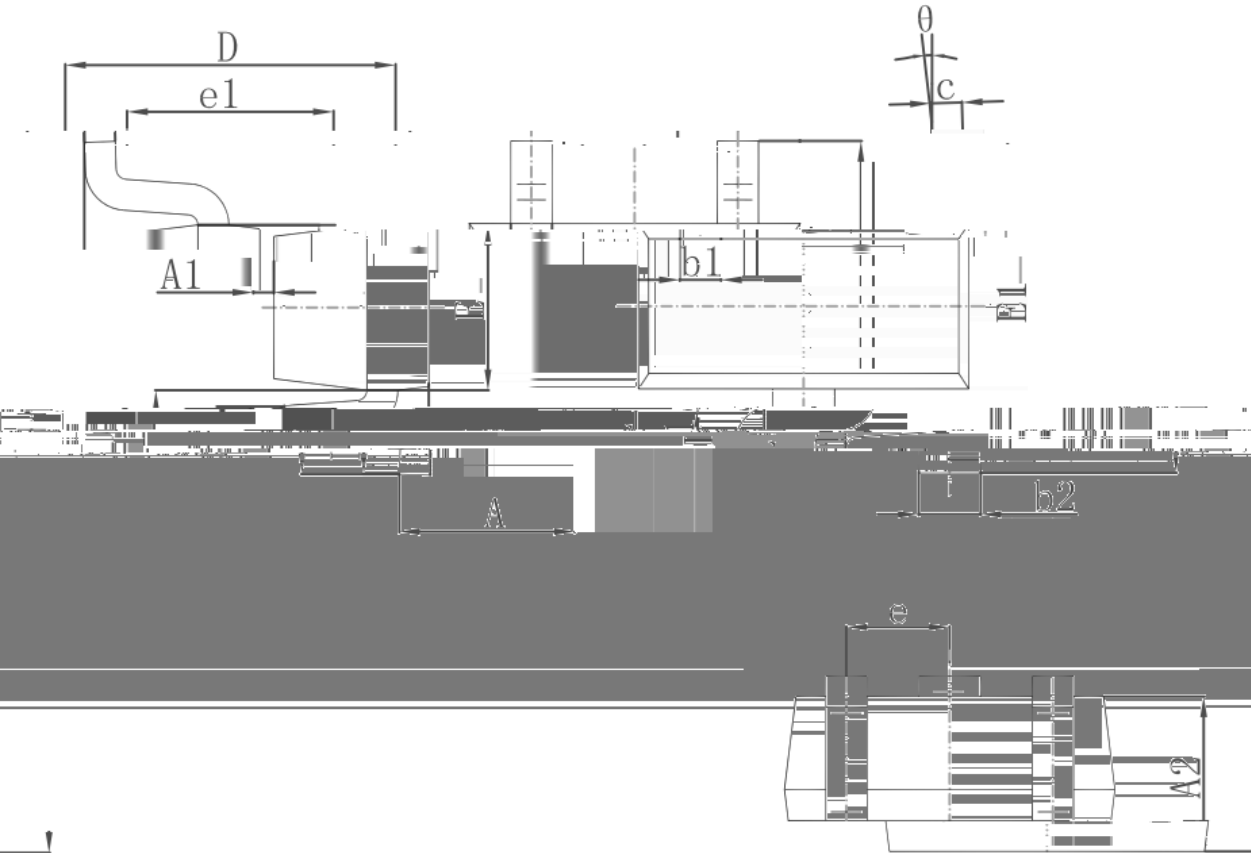


In Millimeters		Dimensions In Inches		Symbol	Dimensions
Max.	Min.	Max.	Min.		Min.
0.900	0.028	0.035		A	0.700
A1	0.028	0.031		A2	0.800
0.250	0.009	0.014		b1	0.450
0.250	0.009	0.014		b2	0.750
e	0.100	0.200		c	0.008
0.700	0.900	0.028	0.035	F	
1.450	1.750	0.057	0.069	L	
0.500 TYP.		0.020 TYP.		1	
0.900	1.100	0.035	0.043	theta	
0.400 REF.		0.016 REF.			
0.260	0.460	0.010	0.018		
0°	8°	0°	8°		

/ Marking Instructions

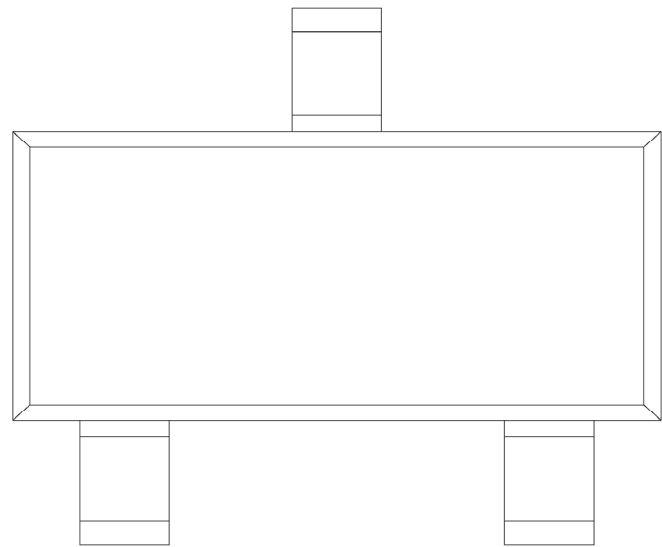

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

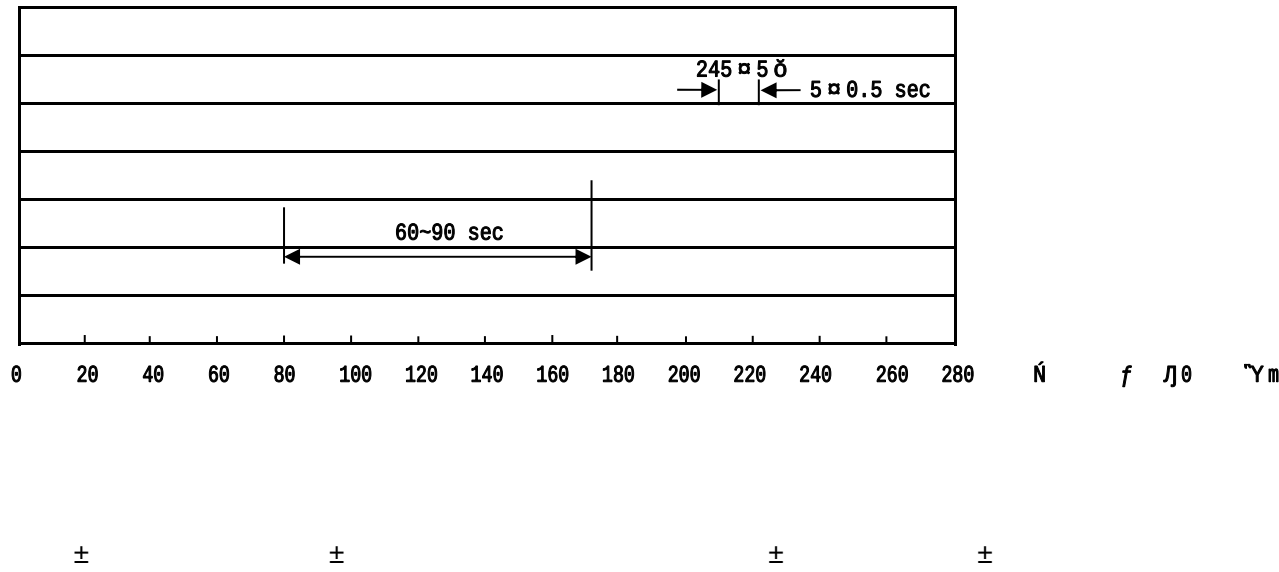

/ Resistance to Soldering Heat Test Conditions

±

/ Packaging SPEC.

/ Notices