

BRD50P06

Б Ѕ

UGV+r q, Ѕ H, F_{uw}




		N		μ
	≤	θ		
		θ		

	N	：				μ
		μ				
						μ

/ Electrical Characteristics(Ta=25)


	N	:				H
		Ω				

/ Electrical Characteristic Curve

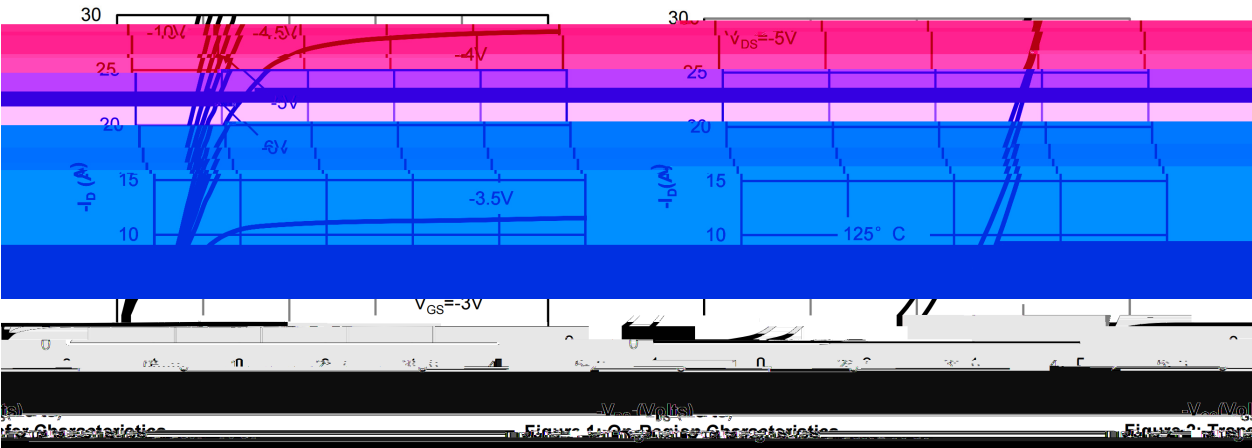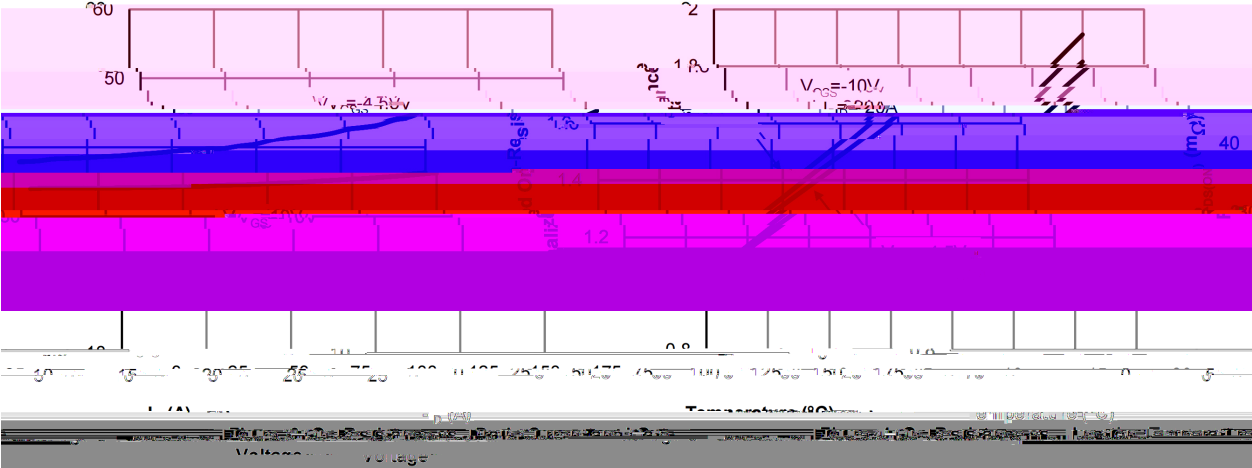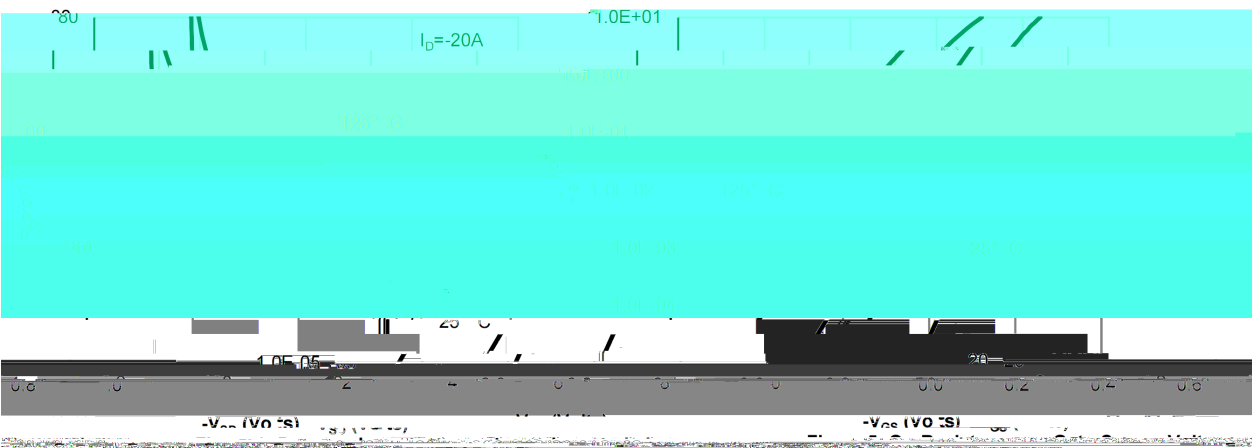

BRD50P06

/ Package Dimensions

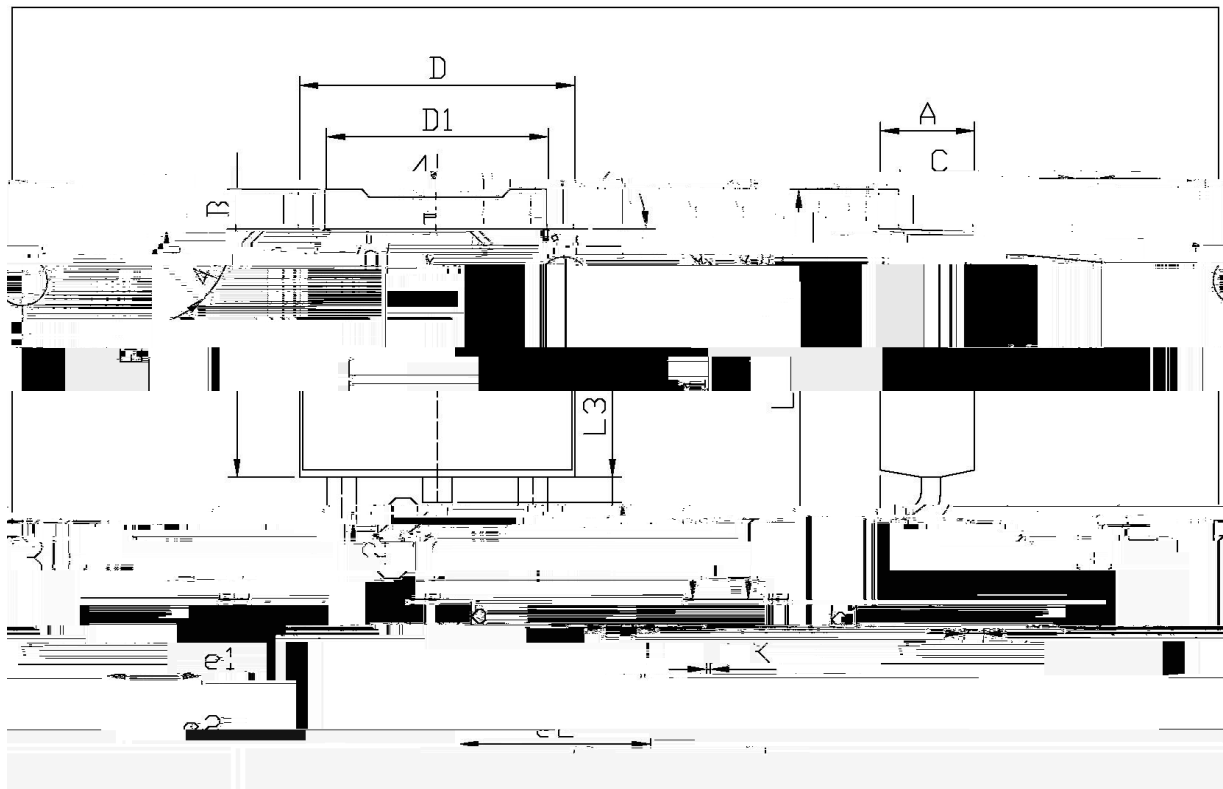


单位: mm

Dimensions in Millimeters			Dimensions in Millimeters		
Min	Max	Symbol	Min	Max	Symbol
1.25	1.68	e1	2.24	2.34	B
0.10	0.15	A	0.42	0.73	C
0.85	0.95	L3	0.45	0.55	D
0.00	0.10	K	0.60	0.60	L
			5.10	5.50	D1

T0-252

/ Marking Instructions

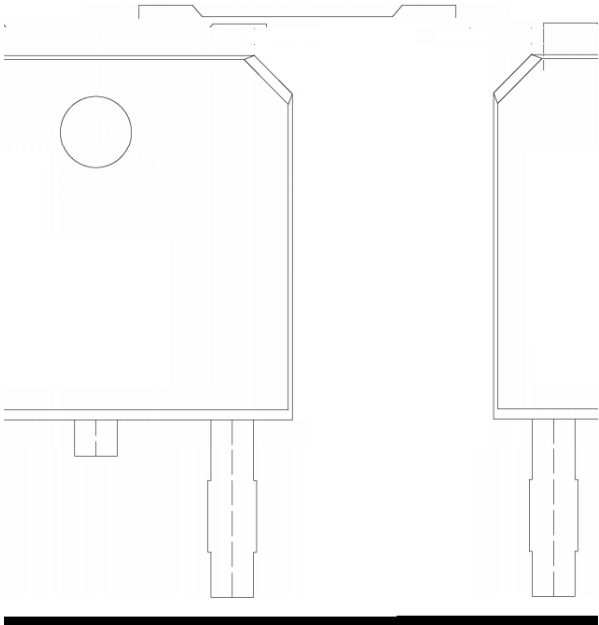

U

83S39

N

N

N

⌀

N

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

U